



A Device abstraction



G : programmed conductance
 $I_{\text{photo}} \propto P^{\gamma_{\text{phys}}}$

B Analog crossbar with digital boundary

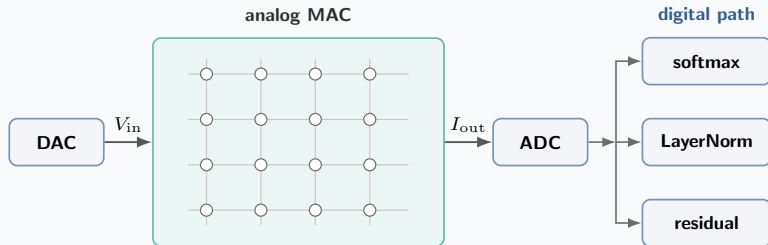

D2D fixed per instance; C2C per read

C ViT deployment policy

