


Wall-Mounted Energy Storage

TR8000WX/TR8500WX




System Topology

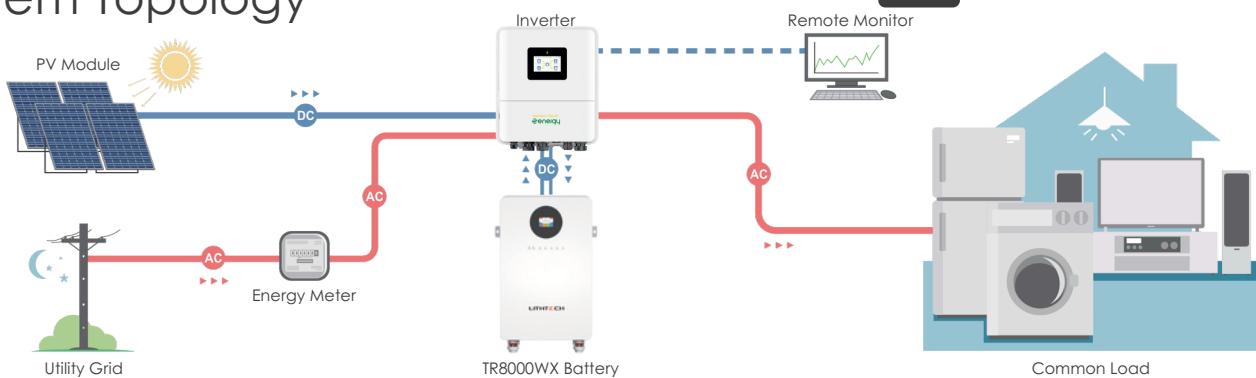

Product-Highlights

Anti-Corrosion & UV Resistance

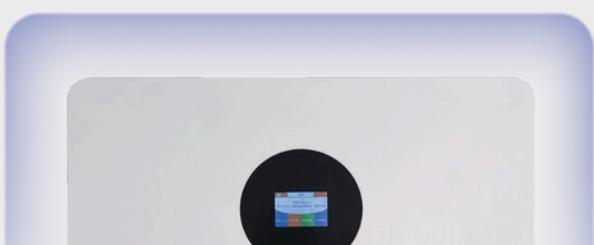

30% Thinner
245mm



8000 Cycles*




1C Fast Charging**



Intelligent BMS
Multi-Safety Protection



Efficient Heat
Dissipation

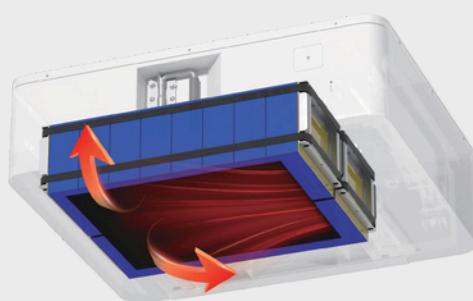

Self-Heating Technology***
Work Under -20°C



Multi Functional
Touch Screen



Noise Level<30dB
Quiet And Comfortable



* 8000 Cycles 80% DOD;

Product Introduction



Technical Parameter

Model	TR8000WX	TR8500WX
Nominal Voltage	51.2V	51.2V
Nominal Capacity	280Ah	314Ah
Max Charge & Discharge Current	200A	157A/200A
Energy	14.336kWh	16.076kWh
Chemistry	LiFePo4	
Cycle life	8000 Times	8000 Times
Rated Output Power	10kW	8kW/10kW
Certification	CE, UN38.3, RoHS, IEC62619, IEC62368	
Communication	RS485, RS232, CAN	
WIFI/BT	Yes	
Depth Of Discharge	90% DOD	
Waterproof	Splashproof/IP21	
Noise Level	<10dB	
Charge Temperature	0°C to 55°C	
Discharge Temperature	-20°C to 60°C	
Recommend Operating Temperature	15°C to 35°C	
Storage Temperature	0°C to 35°C	
Altitude	≤3000m	
Warranty	5 Years	
Dimensions(W×H×D)	75×48×24.5cm	75×48×24.5cm
Weight	~111kg	~111kg
Installation	Floor Mounted	



Cleaner Energy, Simplified Life!

SHENZHEN LITHTECH ENERGY CO.,LTD Email: info@lith-tec.com Add: 14th Floor, Block D, Central Avenue, Xixiang Street, Bao'an District, Shenzhen
©2025 by Shenzhen Lithtech Energy Co., Ltd. All rights reserved. Specifications and features are subject to change without prior notice. Brand names and logos are trademarks of their respective owners.

CONTACT US:



Nhà phân phối chính hãng tại Việt Nam

CÔNG TY TNHH SAVISOLAR

Địa chỉ VP: 486/14 Quốc lộ 13, Hiệp Bình Phước, Thủ Đức, Tp HCM
Điện thoại : 0942680774 (Mr. Sang) ; 0934119040 (Mr. Thà)
Email: savisolar@gmail.com. Web: Savisolar.com

SAVISOLAR



LITHTECH

SAVISOLAR CO., LTD
@savisolar

Điện mặt trời Savisolar
Danh thiếp Zalo



Thà Savisolar
Danh thiếp Zalo

