



ELETRONIC DIVISION

I **ISTRUZIONE D'USO**
E **INSTRUCCIONES DE USO**
GB **INSTRUCTION MANUAL**
F **MODE D'EMPLOI**
P **INSTRUÇÕES DE USO**

Apparecchiatura di comando 1 Motore 220Vac
Cuadro electronico para 1 motor 220Vac
Electronic control panel for a 220Vac drive
Dispositif de commande 1 moteur 220Vac
Central de controle de 1 motor 220Vac

EURO SR2 [code E101]



ATTENZIONE!! Prima di effettuare l'installazione, leggere attentamente questo manuale. La VDS declina ogni responsabilità in caso di non osservanza delle normative vigenti.


¡¡ATENCIÓN!! Antes de efectuar la instalación, lea atentamente este manual. La Empresa VDS no se hace responsable caso de no cumplir las normas vigentes en el país donde se lleva a cabo la instalación.

WARNING!! Before the installation read carefully this manual. VDS declines any responsibility in case of not fullfill the current normative of the installation country.

ATTENTION!! Avant d'effectuer l'installation, lire attentivement le présent manuel qui fait partie intégrante de cet emballage. La société VDS décline toute responsabilité en cas de non respect des normes en vigueur.

ATENÇÃO!! Antes de instalar, leia este manual. VDS isenta de qualquer responsabilidade pelo não cumprimento com os regulamentos.

GB

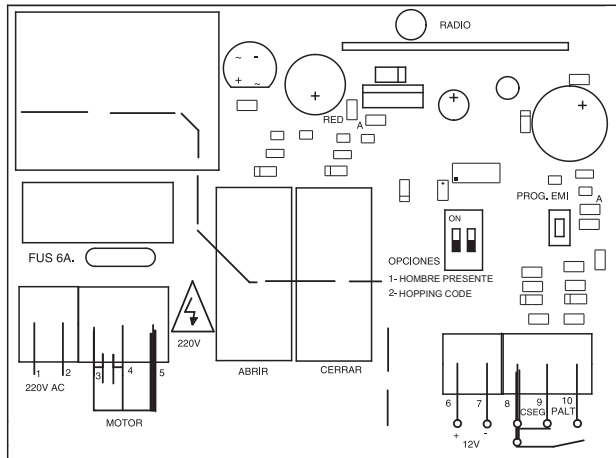

OPTIONS SELECTOR

OPTION 1 - Dead Man

ON For closing operation you must press continually the Alternative button or the Emitter. If you do not press the button the door stops.

OFF Funcionamiento normal.

OPTION 2 - Hopping Code / Code Fixed

ON Hopping code.

OFF Code Fixed.

TECHNICAL CHARACTERISTICS

Alimentation	220V AC +/- 10%
Motor power	0.45HP
Normal Functioning time	127 seconds
Code Combinations	72.000 Billion codes
Number of Codes	31 Codes
Code Programming	Self - taught
Selection of function	Memorize function code
Frequency	433,92MHz
Homologations	Conforms to ETS 300-220/ETS300-683
Sensitivity	Better than -100dBm
Distance	Max. 60 metres
Aerial	Incorporated
Temperature	0 to 70°C

WARNING!!

AN ACCESSIBLE SWITCH, TO TURN OFF THE EQUIPMENT MUST BE INSTALLED FOR SYSTEMS THAT ARE ALWAYS CONNECTED. BEFORE INSTALLING MAKE SURE THE SUPPLY VOLTAGE IS SWITCHED OFF.

Instruction Manual

(EUROS R2)

ACCESSORIES		SAFETY		SETTINGS	
☐	WIRELESSBAND	☐		☐	
☐	RADIO CARD	☐		☐	
☐	LOOP DETECTOR	☐		☐	
☐	PHOTOCCELL INHIBITOR	☐		☐	
☐	ELECTRO LOCK	☐		☐	
☐	GARAGE LIGHT	☐		☐	
☐	PRE FLASHING	☐		☐	
☐	TRAFFIC LIGHT	☐		☐	
☐	THREEPHASE SWITCH	☐		☐	
☐	EMERGENCY STOP	☐		☐	
☐	FUSES	☐		☐	
☐	VARIATOR	☐		☐	
☐	ZENER DIODES	☐		☐	
☐	PHOTOCCELL INPUT	☐		☐	
☒	SAFETY EDGE INPUT	☒		☐	
☐	DEAD MAN	☒		☐	
☐	PHOTOCCELL TEST	☐		☐	
☒	SAFETY EDGE TEST	☒		☐	
☐	OPEN CLOSE LIMIT SWITCH	☐		☐	
☐	ALTERNATIVE BUTTON	☐		☐	
☐	PRESSURE WAVE SWITCH	☐		☐	
☐	AUTOMATIC DOWN TIME (TEMPORIZER)	☐		☐	
☐	OPENING TIME (TEMPORIZER)	☐		☐	
☐	CLOSING TIME (TEMPORIZER)	☐		☐	
☐	DRIVE POWER (TEMPORIZER)	☐		☐	
☐	DEPHASE/ DRIVE 1 & 2 (TEMPORIZER)	☐		☐	
☐	CLOSE SWITCH	☐		☐	
☐	OPEN SWITCH	☐		☐	
☐	STOP BUTTON	☐		☐	
☐	BUFFER CLOSING	☐		☐	
☐	CLOSE BY SAFETY CONTACT	☐		☐	
☐	AUTOMATIC CLOSING	☐		☐	
☐	INHIBITION STOP ON OPENING	☐		☐	
☐	DOUBLE TIME	☐		☐	
☐	DIGITAL TIME	☐		☐	
☐	HOURLY IMPULSE	☐		☐	
☐	PARTIAL / TOTAL INVERSION TIMES	☐		☐	
☐	AUTOMATIC CLOSING FOR LIMIT SWITCH	☐		☐	
☐	AUTOMATIC FREQUENCY AGILITY (Bridge S.)	☐		☐	
☐	POWER SUPPLY FOR ACCESSORIES	☐		☐	
☐	FREE TENSION INPUT	☐		☐	
☐	CONTACT 0V	☐		☐	
☐	RADIO PROGRAMMING BRIDGE SELECTOR	☐		☐	
☐	FREQUENCY CHANNEL SELECTOR	☐		☐	
☐	230V	☐		☐	
☐	380v	☐		☐	
☐	433MHz	☒		☐	
☐	868MHz	☒		☐	
☐	1 DRIVE	☐		☐	
☐	2 DRIVE	☐		☐	
☐	WIRELESSBAND RECEIVER	☐		☐	

■ STANDARD ● OPTIONAL † NOT AVAILABLE

OPERATION

Includes compatible radio with dynamic code transmitters and Variocode. Protected inputs for operations. Protection of main feed and motor with fuse 6A and Varistore. Power-ON led. Alternative button and Safety contact inputs.


You could start an operation with an emitter or with alternative button.

The operation Ends due to the follow conditions: activation of door limit switches or by the end of operation time.


Door limit switches **DO NOT** have connection into the control panel. The operation time is a security time and is fixed to 127 secs.

Vario emitter and the alternative button activate the same function. If the door is in an opening operation and we push the emitter or alternative button the door stops, if we push another time the door starts a closing operation, if we push another time the door starts an opening operation, and successively.

STANDARD CONTROL PANEL SET UP

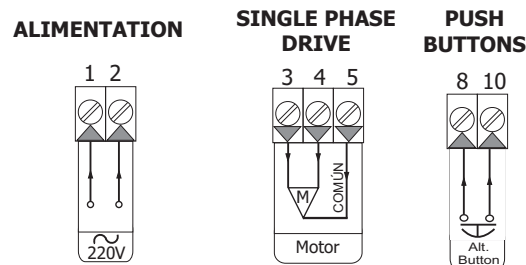

TERMINAL CONNECTIONS

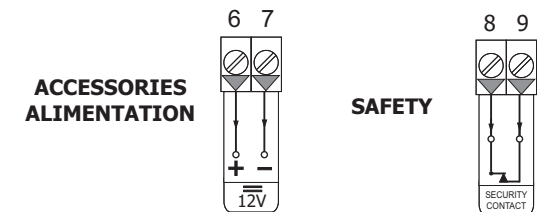

UNI
EN

I nostri prodotti se installati da personale specializzato idoneo alla valutazione dei rischi, rispondono alle normative UNI EN 12453-EN 12445

Nuestros productos tienen que ser instalados por personal cualificado capaz de evaluar los posibles riesgos, cumpliendo con la norma UNI EN 12453, EN 12445

Our products if installed by qualified personnel capable to evaluate risks, complies with UNI EN 12453, EN 12445 normative

Nos produits si installés par personnel qualifié capable d'évaluer les risques, sont conformes à la norme UNI EN 12453, EN 12445

Nossos produtos se instalados por pessoal qualificado, capaz de avaliar riscos, cumprir UNI EN 12453, EN 12445

CE

Il marchio CE è conforme alla direttiva europea CEE 89/336 + 93/68 D.L.04/12/1992 n.476

El marcaje CE indica que cumple con la directiva europea CEE 89/336 + 93/68 D.L.04/12/1992 n.476

The CE mark indicates that complies with EEC European directive 89/336 + 93/68 D.L.04/12/1992 n.476

Le marque CE est conforme avec la CEE directive européenne 89/336 + 93/68 D.L.04/12/1992 n.476

A marca CE em conformidade com a Directiva Europeia CEE 89/336 + 93/68 D.L.04/12/1992 n.476

I dati e le immagini sono puramente indicativi

VDS si riserva il diritto di modificare in qualsiasi momento le caratteristiche dei prodotti descritti a suo insindacabile giudizio, senza alcun preavviso.

Los datos y las imágenes son orientativos

VDS se reserva el derecho de modificar en cualquier momento las características de los productos descritos en su única discreción, sin previo aviso.

The data and images are for guidance only

VDS reserves the right to change at any time characteristics of the products described in its sole discretion, without notice.

Les données et les images sont à titre indicatif seulement

VDS réserve le droit de modifier à tout moment les caractéristiques des produits décrits à sa seule discrétion, sans préavis.

Os dados e as imagens são apenas para orientação

VDS reserva o direito de alterar, a qualquer tempo as características dos produtos descritos em seu exclusivo critério, sem aviso prévio.



Via Circolare p.i.p. sn
65010 Santa Teresa di Spoltore (PE) - Italy
Tel. 085-4971946 - Fax 085-4973849
www.vdsproduction.it - vds@vdsproduction.it