

SPARTACUS-Surface User Guide

Robin J. Hogan

European Centre for Medium Range Weather Forecasts, Reading, UK

Document version 0.7.1 (October 2020) applicable to *SPARTACUS-Surface* version 0.7.1*

1 Introduction

SPARTACUS-Surface is a Fortran-2003 software library for computing the 3D interaction of solar (or *shortwave*) and thermal-infrared (or *longwave*) radiation with complex surface canopies, especially forests and urban areas. It uses a multi-layer description of the canopy but with a statistical description of the horizontal distribution of trees and buildings. This greatly reduces the variables needed to describe the canopy, and makes the scheme fast enough to use in weather and climate models.

The detailed theoretical basis of the library is provided in two papers: [Hogan et al. \(2018\)](#) developed the short-wave forest solver, and [Hogan \(2019b\)](#) extended this to include buildings and longwave radiative transfer (these works developed two prototype codes in Matlab: *SPARTACUS-Vegetation* and *SPARTACUS-Urban*, both available from the SPARTACUS web site). The resulting algorithm combines three key ideas from earlier papers in the atmospheric radiative transfer literature:

- To represent horizontal variations in vegetation leaf density (or equivalently, extinction coefficient), each layer in a vegetation canopy is divided horizontally into three regions: clear-air (unvegetated) and two vegetated regions of equal fractional cover but different extinction coefficient. This approach was proposed by [Shonk and Hogan \(2008\)](#), who showed (in the context of cloudy radiative transfer) that the radiative effect of the full distribution of extinction coefficient could be approximated well given an appropriate choice for the extinction coefficients of the two regions.
- Three-dimensional radiative effects are treated rigorously by using the *Speedy Algorithm for Radiative Transfer through Cloud Sides* (SPARTACUS) of [Hogan et al. \(2016\)](#), but replacing clouds with trees and buildings. Since it is reasonable to treat trees and buildings as randomly distributed in the horizontal plane (see also [Hogan, 2019a](#)), the rate of exchange of radiation between the clear and vegetated parts of a layer may be assumed to be proportional to the length of the interface between them, and likewise for the rate of interception of radiation by building walls.
- The *Discrete Ordinate Method* is used to approximate the zenithal distribution of diffuse radiation, with the coupled ordinary differential equations solved by Eigen decomposition similarly to [Stamnes et al. \(1988\)](#). This is more robust than the matrix-exponential method used by [Hogan et al. \(2016\)](#), and more accurate since *SPARTACUS-Surface* allows the diffuse radiation field to be described by more than just two streams.

Section 2 describes how to compile and use the offline version of *SPARTACUS-Surface*, which is essentially a Unix program that reads a configuration file and a netCDF file containing a description of a number of surfaces, and outputs a netCDF file containing the computed radiation properties. Sections 3–6 describe how to configure and run the offline software, and the contents of the input and output data files. Section 7 outlines how to incorporate *SPARTACUS-Surface* into a larger Fortran program, such as an atmospheric model.

*This document is copyright © 2019– ECMWF. If you have any queries about *SPARTACUS-Surface* that are not answered by this document then please email me at r.j.hogan@ecmwf.int.

2 Compiling the package

The offline version of *SPARTACUS-Surface* is designed to be used on a Unix-like platform. You will need a Fortran compiler that supports the 2003 standard, such as `gfortran`. As a prerequisite, you will need to install the netCDF library, including the Fortran interface (packages to install on a Linux system are typically called `libnetcdf-dev` or `libnetcdf-devel`). If you have a recent netCDF version then the command

```
nc-config --fc
```

should return the Fortran compiler for which the netCDF library was compiled. To run some of the tests, you will also need to install the NCO utilities for manipulating netCDF Files.

First unpack the package and enter the subdirectory as follows:

```
tar xvfz spartacus_surface-0.8.tar.gz
cd spartacus_surface-0.8
```

On a non-GNU platform you may need to untar and unzip the package using the `tar` and `gunzip` commands separately. The `README` file contains concise instructions on compilation and testing, while the `COPYING` file provides the license conditions. The subdirectories are as follows:

radsurf The *SPARTACUS-Surface* source code for canopy radiative transfer

radtool Mathematical support routines for radiative transfer

utilities Source code for useful utilities, such as reading netCDF files

driver The source code for the offline driver program `spartacus_surface`

mod Where Fortran module files are written

lib Where the static libraries are written

bin Where the executable `spartacus_surface` is written

test Test cases including Matlab code to plot the outputs

doc The source for this document

Compilation on different platforms using different compilers is facilitated by the various `Makefile_include.<prof>` files in the top-level directory: if you type

```
make
```

or

```
make PROFILE=gfortran
```

the code will be compiled using the `gfortran` compiler via the Makefile variables set in the `Makefile_include.gfortran` file. Using instead `PROFILE=pgi` will use the `Makefile_include.pgi` file to attempt to compile with the PGI compiler, while `PROFILE=intel` selects the Intel compiler. If everything goes to plan this should create the executable `bin/spartacus_surface` and various static libraries in the `lib` directory.

One common reason the code doesn't compile out of the box is that it can't find the netCDF library files. The *SPARTACUS-Surface* Makefile uses the `nf-config` script that comes with recent versions of the netCDF library to create the Makefile variables `NETCDF_INCLUDE` and `NETCDF_LIB`. If `nf-config` is not available on your system, or it fails to correctly locate the netCDF library files, then the cleanest way to fix this is to create a `Makefile_include.local` file (starting from one of the existing `Makefile_include.*` files) that defines `NETCDF_INCLUDE` and `NETCDF_LIB` explicitly to contain arguments for the compile and link operations, respectively. Suppose you installed netCDF in `/path/to/netcdf` and you use the `gfortran` compiler then your file might contain:

```
include Makefile_include.gfortran
NETCDF = /path/to/netcdf
NETCDF_INCLUDE = -I$(NETCDF)/include
NETCDF_LIB = -L$(NETCDF)/lib -lnetcdff -lnetcdf -Wl,-rpath,$(NETCDF)/lib
```

You should then be able to build the code with

```
make PROFILE=local
```

To compile with debugging options turned on (no optimization, bounds checking and initializing real numbers with not-a-number), type

```
make PROFILE=gfortran DEBUG=1
```

Finer tuning may be achieved by overriding the optimization and debugging flags used in `Makefile` explicitly, for example

```
make PROFILE=gfortran OPTFLAGS="-O1" DEBUGFLAGS="-g1 -pg"
```

Remember that if you change the compile settings you will probably want to recompile everything, in which case you first need to remove all compiled files with

```
make clean
```

3 Running the offline scheme

To test the code, type

```
make test
```

which runs `make` in each of the subdirectories of the `test` directory. The `README` files in these directories provide more information on what they are doing, and some Matlab scripts are provided to visualize the outputs.

You will see in the output of the tests the command line in each invocation of *SPARTACUS-Surface*, which is of the form

```
spartacus_surface config.nam input.nc output.nc
```

where `spartacus_surface` needs to be the full path to the *SPARTACUS-Surface* executable, `config.nam` is a Fortran namelist file configuring the code, `input.nc` contains the input atmospheric profiles and `output.nc` contains the output irradiance (flux) profiles. The namelist file contains a `radsurf` namelist that configures the *SPARTACUS-Surface* scheme itself; the parameters available are described in section 4. The file also contains a `radsurf_config` namelist that configures aspects of the offline package, described in section 5. Only the `radsurf` namelist is used when *SPARTACUS-Surface* is incorporated into an atmospheric model.

The input netCDF file contains numerous floating-point variables listed in Table 1. The dimensions are shown in the order that they are listed by the `ncdump` utility, with the first dimension varying slowest in the file (opposite to the Fortran convention). Most variables are stored as a function of column and layer (dimensions named `col` and `layer` in Table 1, although the actual dimension names are ignored by *SPARTACUS-Surface*). The `layer_int` dimension corresponds to interfaces between layers, plus the top-of-canopy and surface, and so must be one more than `layer`. Note that both `layer` and `layer_int` should increase upwards from the surface.

The optional `sw` and `lw` dimensions allow for shortwave and longwave optical properties of leaves and facets to be specified in user-defined spectral intervals. If these dimensions are omitted for these variables then constant optical properties will be assumed across the longwave and shortwave spectra.

Some variables can be omitted in which case default values will be used or these fields will be constructed according to `radsurf_config` namelist parameters (section 5).

Table 1: Main variables contained in the input netCDF file to *SPARTACUS-Surface*. All are floating-point numbers except for `surface_type`, which contains integers.

Variable	Dimensions	Description
<code>cos_solar_zenith_angle</code>	col	Cosine of solar zenith angle
<code>surface_type</code>	col	Surface type: (0) flat, (1) forest, (2) urban, and (3) vegetated urban
<code>height</code>	col, layer_int	Height of layer interfaces (m)
<code>veg_fraction</code>	col, layer	Vegetation fraction
<code>veg_scale</code>	col, layer	Vegetation horizontal scale (m)
<code>veg_extinction</code>	col, layer	Wavelength-independent vegetation extinction coefficient (m^{-1})
<code>veg_fsd</code>	col, layer	Fractional standard deviation of vegetation extinction
<code>veg_contact_fraction</code>	col, layer	Fraction of vegetation edge in contact with building walls
<code>building_fraction</code>	col, layer	Building fraction
<code>building_scale</code>	col, layer	Building horizontal scale (m)
<code>clear_air_temperature</code>	col, layer	Temperature of clear (unvegetated) part of layer (K)
<code>veg_temperature</code>	col, layer	Temperature of leaves (K)
<code>veg_air_temperature</code>	col, layer	Temperature of air in vegetated part of layer (K)
<code>air_temperature</code>	col, layer	Alternative way to specify <code>clear_air_temperature</code> and <code>veg_air_temperature</code> if the same (K)
<code>ground_temperature</code>	col	Ground temperature (K)
<code>roof_temperature</code>	col, layer	Temperature of the roofs at the top of the layer (K)
<code>wall_temperature</code>	col, layer	Wall temperature (K)
<code>ground_sw_albedo</code>	col, sw	Shortwave albedo of ground
<code>ground_sw_albedo_direct</code>	col, sw	Shortwave albedo of ground to direct beam (if different)
<code>ground_lw_emissivity</code>	col, lw	Longwave emissivity of ground
<code>veg_sw_ssa</code>	col, layer, sw	Shortwave single-scattering albedo of the leaves
<code>veg_lw_ssa</code>	col, layer, lw	Longwave single-scattering albedo of the leaves
<code>roof_sw_albedo</code>	col, layer, sw	Shortwave albedo of roofs
<code>roof_sw_albedo_direct</code>	col, layer, sw	Shortwave albedo of roofs to direct beam (if different)
<code>roof_lw_emissivity</code>	col, layer, lw	Longwave emissivity of roofs
<code>wall_sw_albedo</code>	col, layer, sw	Shortwave albedo of walls
<code>wall_sw_specular_fraction</code>	col, layer, sw	Fraction of wall reflection that is specular
<code>wall_lw_emissivity</code>	col, layer, lw	Longwave emissivity of walls
<code>sky_temperature</code>	col, layer	Equivalent emitting temperature of sky (K)
<code>top_flux_dn_sw</code>	col, layer, sw	Top-of-canopy downwelling shortwave flux (W m^{-2})
<code>top_flux_dn_direct_sw</code>	col, layer, sw	Top-of-canopy downwelling direct shortwave flux (W m^{-2})

Input fields should be provided in order of increasing height, and the output data use the same convention. The `surface_type` variable selects how the column is to be treated, as depicted in Fig. 1.

The output netCDF file contains the typical set of broadband fluxes and absorption rates listed in Table 2. If you need them spectrally resolved (using the input spectral discretization) then set the `radsurf_config` namelist variable `do_spectral` to `true` and the same variables will be output but with the prefix `spectral_`.

Table 2: Variables contained in the output netCDF file from *SPARTACUS-Surface*. All fluxes (or irradiances) and absorption rates have units of W m^{-2} , but note that this is power per unit area of the *entire domain*, not per unit area of a specific facet type. ‘Net’ fluxes are defined as the flux into a facet type (or downward) minus the flux out of a facet type (or upward).

Variable	Dimensions	Description
<code>height</code>	col, layer_int	Height of layer interfaces above ground (m)
<code>ground_flux_dn_sw</code>	col	Downwelling shortwave flux into the ground
<code>ground_flux_net_sw</code>	col	Net shortwave flux into the ground
<code>ground_flux_dn_direct_sw</code>	col	Direct downwelling shortwave flux into the ground
<code>top_flux_dn_sw</code>	col	Top-of-canopy downwelling shortwave flux
<code>top_flux_net_sw</code>	col	Top-of-canopy net shortwave flux
<code>top_flux_dn_direct_sw</code>	col	Top-of-canopy direct downwelling shortwave flux
<code>roof_flux_in_sw</code>	col, layer	Shortwave flux into roofs
<code>roof_flux_net_sw</code>	col, layer	Net shortwave flux into roofs
<code>wall_flux_in_sw</code>	col, layer	Shortwave flux into walls
<code>wall_flux_net_sw</code>	col, layer	Net shortwave flux into walls

clear_air_absorption_sw	col, layer	Shortwave absorption rate in clear-air part of layer
veg_absorption_sw	col, layer	Shortwave absorption rate by leaves
veg_air_absorption_sw	col, layer	Shortwave absorption rate by air in vegetated part of layer
ground_flux_dn_lw	col	Downwelling longwave flux into the ground
ground_flux_net_lw	col	Net longwave flux into the ground
top_flux_dn_lw	col	Top-of-canopy downwelling longwave flux
top_flux_net_lw	col	Top-of-canopy net longwave flux
roof_flux_in_lw	col, layer	Longwave flux into roofs
roof_flux_net_lw	col, layer	Net longwave flux into roofs
wall_flux_in_lw	col, layer	Longwave flux into walls
wall_flux_net_lw	col, layer	Net flux into walls
clear_air_absorption_lw	col, layer	Net longwave absorption rate in clear-air part of layer
veg_absorption_lw	col, layer	Net longwave absorption rate by leaves
veg_air_absorption_lw	col, layer	Net longwave absorption rate by air in vegetated part of layer

4 Configuring the SPARTACUS-Surface algorithm

The detailed settings of *SPARTACUS-Surface* are configured using the `radsurf` namelist in the namelist file provided as the first command-line argument to the `spartacus_surface` executable. The available namelist parameters are listed in Table 3.

Table 3: Options for the `radsurf` namelist that configures *SPARTACUS-Surface* algorithm. The type of each parameter can be inferred from its name: logicals begin with `do_` or `use_`, integers start with `i_` or `n_`, strings end with `_name`, and all other parameters are real numbers.

Parameter	Default, other values	Description
<i>General</i>		
<code>do_sw</code>	true	Compute shortwave fluxes?
<code>do_lw</code>	true	Compute longwave fluxes?
<code>do_vegetation</code>	true	Will vegetation be represented?
<code>do_urban</code>	true	Will urban areas be represented?
<code>use_sw_direct_albedo</code>	false	Specify ground and roof albedos separately for direct solar radiation?
<code>min_vegetation_fraction</code>	10^{-6}	Minimum area fraction below which a region is removed completely
<i>Options specific to forest tiles</i>		
<code>n_vegetation_region_forest</code>	1, 2	Number of regions used to describe vegetation (2 needed for heterogeneity)
<code>n_stream_sw_forest</code>	4	Streams per hemisphere to describe diffuse shortwave radiation
<code>n_stream_lw_forest</code>	4	Streams per hemisphere to describe longwave radiation
<code>use_symmetric_vegetation_scale_forest</code>	true	Compute vegetation perimeter length using Eq. 20 of Hogan et al. (2018)? Otherwise Eq. 19
<code>vegetation_isolation_factor_forest</code>	0.0, 0.0–1.0	In forests dense vegetation region is (0.0) embedded within sparse region or (1.0) in physically isolated regions, or in between
<code>vegetation_isolation_factor_urban</code>	0.0, 0.0–1.0	In urban areas dense vegetation region is (0.0) embedded within sparse region or (1.0) in physically isolated regions, or in between
<i>Options specific to urban tiles</i>		
<code>n_vegetation_region_urban</code>	1, 2	Number of regions used to describe vegetation (2 needed for heterogeneity)
<code>n_stream_sw_urban</code>	4	Streams per hemisphere to describe diffuse shortwave radiation
<code>n_stream_lw_urban</code>	4	Streams per hemisphere to describe longwave radiation
<code>use_symmetric_vegetation_scale_urban</code>	true	Compute vegetation perimeter length using Eq. 20 of Hogan et al. (2018)? Otherwise Eq. 19

vegetation_isolation_factor_urban	0.0, 0.0–1.0	Dense vegetation region is (0.0) embedded within sparse region or (1.0) in physically isolated regions
-----------------------------------	--------------	--

The number of streams can be any positive integer, but note that this is the number of quadrature points that the radiation field is divided into *per hemisphere*, so a value of 4 corresponds to an ‘8-stream scheme’ in the convention that all possible directions are considered. Larger values give more accuracy at greater computational cost, but as shown by [Hogan \(2019b\)](#), there is little change in the results above a value of 4.

The other parameters in Table 3 allow the treatment of vegetation to be fine tuned. If the number of vegetation regions is 1 then the trees are represented as in Fig. 1, with a single vegetation extinction coefficient per layer. In order to represent horizontal heterogeneity within tree crowns, a value of 2 should be selected, resulting in the representation in Fig. 2. The `vegetation_isolation_factor_*` parameters describe the contact between the clear region and the two vegetated regions in each layer, with the extremes being 0.0 in which the denser vegetation region is completely embedded in the sparser region (the assumption used by [Hogan et al., 2018](#)), and 1.0 in which the dense and sparse regions form unconnected tree crowns.

SPARTACUS-Surface assumes that the rate of lateral exchange of radiation between the clear and vegetated regions is proportional to the normalized perimeter length, L , separating the vegetation and clear regions, i.e. the perimeter length divided by the horizontal area of the domain. This variable has units of m^{-1} and is a strong function of vegetation fraction, so it is more convenient for models to parameterize the horizontal size of typical tree crowns, as expressed by the `vegetation_scale` input variable in Table 1. The `use_symmetric_vegetation_scale_*` parameters determine how this scale is used to compute L . If a symmetric vegetation scale is selected then Eq. 20 of [Hogan et al. \(2018\)](#) is used:

$$L = 4v(1 - v)/S, \quad (1)$$

where v is the vegetation fraction and S is the vegetation scale. In this case, as the vegetation fraction approaches one, the normalized perimeter approaches zero, indicating that the tree crowns effectively merge. If `use_symmetric_vegetation_scale_*` is false then Eq. 19 of [Hogan et al. \(2018\)](#) is used:

$$L = 4v/D, \quad (2)$$

where this time `vegetation_scale` is interpreted as the effective crown diameter, D . This has the property that L approaches a constant value as the vegetation fraction approaches one, which could be thought of as the property of *crown shyness* exhibited by some forest canopies.

The `building_scale` input variable in Table 1 is always interpreted as an effective building diameter, i.e. the code uses (2) to convert to the normalized building perimeter length in each layer, L , given the building fraction v .

5 Configuring the offline package

In addition to the namelist parameters described in section 4 an additional set of parameters are available in the `radsurf_config` namelist that are specific to the offline version of *SPARTACUS-Surface* and are listed in Table 4. In general if these parameters are present in the namelist then they will override the corresponding variable provided in the input file.

Table 4: Options for the `radsurf_config` namelist that configures additional aspects of the offline radiation scheme. All entries must be scalars. If an override parameter is present then usually it need not be included in the input file.

Parameter	Description
<i>Execution control</i>	
<code>nrepeat</code>	Number of times to repeat, for benchmarking
<code>istartcol</code>	Start at specified input column (1 based)
<code>iendcol</code>	End at specified input column (1 based)

iverbose	Verbosity in offline setup (default 2)
do_parallel	Use OpenMP parallelism? (default true)
nblocksize	Number of columns per block when using OpenMP
do_conservation_check	Check final energy balance for each column
<i>Override input variables</i>	
cos_solar_zenith_angle	Override cosine of solar zenith angle
ground_sw_albedo	Override shortwave albedo of ground
roof_sw_albedo	Override shortwave albedo of roofs
wall_sw_albedo	Override shortwave albedo of walls
ground_lw_emissivity	Override longwave emissivity of ground
roof_lw_emissivity	Override longwave emissivity of roofs
wall_lw_emissivity	Override longwave emissivity of walls
vegetation_fraction	Override vegetation fraction
vegetation_extinction	Override vegetation extinction coefficient (m^{-1})
vegetation_fsd	Override vegetation fractional standard deviation of extinction
vegetation_sw_ssa	Override vegetation shortwave single scattering albedo
vegetation_lw_ssa	Override vegetation longwave single scattering albedo
top_flux_dn_sw	Override top-of-canopy downwelling shortwave flux (W m^{-2})
top_flux_dn_direct_sw	Override top-of-canopy downwelling direct shortwave flux (W m^{-2})
top_flux_dn_lw	Override top-of-canopy downwelling longwave flux (W m^{-2})

6 Checking the configuration

When `spartacus_surface` is run, it outputs to the screen a summary of the configuration options, with the level of detail controlled by the `radsurf_config` namelist parameter `iverbose`. This can be used to check that *SPARTACUS-Surface* has been configured as intended. The following is an example from the default test in the `test/simple` directory, in the case of `iverbose=2`:

```
----- OFFLINE SPARTACUS-SURFACE RADIATION SCHEME -----
Copyright (C) 2019-2020 European Centre for Medium-Range Weather Forecasts
Contact: Robin Hogan (r.j.hogan@ecmwf.int)
Floating-point precision: double
General settings:
  Represent vegetation ON                (do_vegetation=T)
  Represent urban areas ON               (do_urban=T)
  Do shortwave (SW) calculations ON      (do_sw=T)
  Do longwave (LW) calculations ON       (do_sw=T)
  Number of SW spectral intervals = 1    (nsw)
  Number of LW spectral intervals = 1    (nlw)
  Minimum vegetation fraction = .100E-05 (min_vegetation_fraction)
Settings for forests:
  Number of vegetation regions = 2       (n_vegetation_region_forest)
  Use symmetric vegetation scale ON       (use_symmetric_vegetation_scale_forest=T)
  Vegetation isolation factor = 0.00     (vegetation_isolation_factor_forest)
  SW diffuse streams per hemisphere = 2  (n_stream_sw_forest)
  LW streams per hemisphere = 2          (n_stream_lw_forest)
Settings for urban areas:
  Number of vegetation regions = 2       (n_vegetation_region_urban)
  Use symmetric vegetation scale ON       (use_symmetric_vegetation_scale_urban=T)
  Vegetation isolation factor = 0.00     (vegetation_isolation_factor_urban)
  SW diffuse streams per hemisphere = 2  (n_stream_sw_urban)
  LW streams per hemisphere = 2          (n_stream_lw_urban)
Reading NetCDF file test_surfaces_in.nc
  Overriding cosine of the solar zenith angle with 0.500
  Overriding vegetation extinction with 0.250
  Setting temperature of clear-air and air in vegetation to air_temperature
  Setting vegetation temperature equal to air temperature
  Assuming roof albedo to direct albedo is the same as to diffuse
  Assuming wall reflection is Lambertian (no specular component)
    1: Flat
    2: Forest,                2 layers, 2 diffuse streams per hemisphere, 3 regions
```

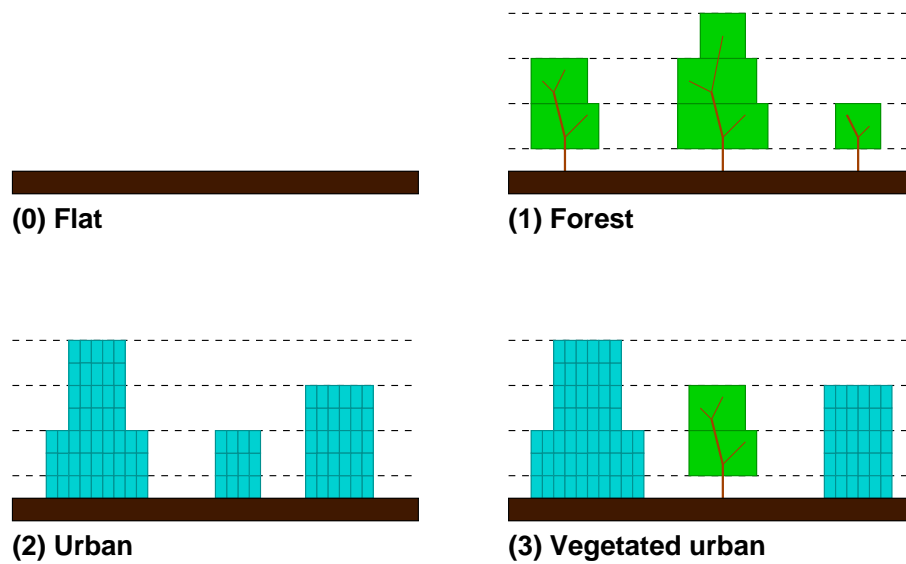


Figure 1: Schematic of the four surfaces represented by the `surface_type` variable provided in the *SPARTACUS-Surface* input file (see Table 1).

3: Unvegetated urban, 2 layers, 2 diffuse streams per hemisphere, 1 region								
4: Vegetated urban, 2 layers, 2 diffuse streams per hemisphere, 3 regions								
Direct shortwave budget								
Layer	Ground	Air	Wall	Roof	Veg	Air-veg	Top	Residual
1	320.000	0.000	0.000	0.000	0.000	0.000	320.000	0.000E+00
2	87.441	0.000	0.000	0.000	293.893	0.000	381.334	0.568E-13
3	51.015	0.000	185.652	119.081	0.000	0.000	355.748	-0.568E-13
4	25.686	0.000	163.389	119.057	51.620	0.000	359.752	0.000E+00
Diffuse shortwave budget								
Layer	Ground	Air	Wall	Roof	Veg	Air-veg	Top	Residual
1	80.000	0.000	0.000	0.000	0.000	0.000	80.000	0.000E+00
2	27.565	0.000	0.000	0.000	67.146	0.000	94.710	0.000E+00
3	20.203	0.000	37.465	30.846	0.000	0.000	88.514	0.000E+00
4	13.199	0.000	33.583	30.840	12.105	0.000	89.726	-0.142E-13
Internal longwave budget								
Layer	Ground	Air	Wall	Roof	Veg	Air-veg	Top	Residual
1	-328.035	0.000	0.000	0.000	0.000	0.000	-328.035	0.000E+00
2	-327.647	0.031	0.000	0.000	216.819	0.011	-110.785	0.847E-05
3	-80.093	-0.158	-138.486	-125.417	0.000	0.000	-344.211	0.569E-01
4	-55.546	-0.151	-130.312	-125.423	-32.158	-0.002	-343.627	0.351E-01
Incoming longwave budget								
Layer	Ground	Air	Wall	Roof	Veg	Air-veg	Top	Residual
1	263.855	0.000	0.000	0.000	0.000	0.000	263.855	0.000E+00
2	89.108	0.029	0.000	0.000	198.716	0.010	287.868	-0.416E-02
3	64.432	0.157	111.365	100.876	0.000	0.000	276.877	-0.462E-01
4	41.886	0.146	101.133	100.871	34.728	0.002	278.796	-0.287E-01

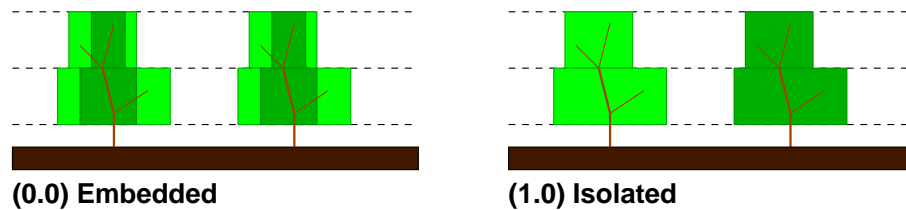


Figure 2: Schematic illustrating how the `vegetation_isolation_factor_*` parameters in Table 3 describe the contact between the clear-air region and the two vegetated regions in each layer.

Writing NetCDF file test_surfaces_out.nc

7 Incorporating *SPARTACUS-Surface* into another program

SPARTACUS-Surface is primarily a software library that is designed to be called from within a larger program such as an atmospheric model. The library is written entirely using Fortran modules, and you will need all the Fortran source files in the `utilities`, `radtool` and `radsurf` directories. The `utilities/radiation_io.F90` file provides the `nulout` unit for logging messages and the `radiation_abort` routine for exiting if an error occurs. This file will likely need to be rewritten for your model, for example to ensure appropriate clean-up after an anomalous abort.

SPARTACUS-Surface adopts a strict policy of no global variables and no variables in modules (which are really a type of global variable). Therefore, information is passed to and from routines only via the arguments to those routines. This includes configuration information, which is stored in a `config_type` object from the `radsurf_config` module. As part of the initialization stage of the atmospheric model, such an object should be created, and will later be passed to the routine that performs the radiative transfer. A configuration object is created as follows:

```
use radsurf_config, only : config_type ! Read module defining configuration type
type(config_type) :: config           ! Create a configuration object
! ...optionally set some default values - see radsurf/radsurf_config.F90...
call config%read(namelist_file_name) ! Read configuration information from a namelist file
call config%consolidate()             ! Perform any additional configuration steps needed
```

Performing radiative transfer on a set of `ncol` surface canopy profiles is carried out in two parts. In the first part, the geometric and spectral properties of the canopies are used to compute (1) the top-of-canopy properties presented to the atmosphere above such as spectral albedo and upward longwave emission, and (2) fluxes within the canopy that are normalized with respect to downwelling shortwave and longwave fluxes at the top-of-canopy. It is envisaged that after this step, the top-of-canopy properties presented to the atmosphere are used as boundary conditions for a full atmospheric radiative transfer calculation. One of the outputs of such a calculation is the downwelling spectral shortwave and longwave fluxes at top-of-canopy. The second (much simpler) part of the interface to *SPARTACUS-Surface* involves scaling the normalized fluxes computed in the first step to obtain the absolute fluxes within the canopy, including net fluxes into ground, roofs, walls and vegetation. These fluxes and heating rates can then be used by a canopy energy balance model.

The first part involves calling the `radsurf` routine, which takes as arguments a number of objects. The input description of the canopy is in the form of three Fortran derived types: the `canopy_properties_type` describes the wavelength-independent properties of the canopy, and the `sw_spectral_properties_type` and `lw_spectral_properties_type` describe the shortwave and longwave spectral properties. Each object describes `ncol` surface ‘columns’ to be treated independently; each column could correspond to an atmospheric model column, or alternatively may represent multiply ‘tiles’ underlying one or more atmospheric columns.

The arrays in the `canopy_properties_type` could have been dimensioned `nmaxlay×ncol`, where `nmaxlay` is the maximum number of layers in any of the individual columns. However, it is recognised that in a global model many or even most of the columns would be treated as ‘flat’ (type 0 in Fig. 1) and many layers would be unused. Therefore the arrays in these objects use a ‘packed’ representation, explained by considering some of the elements of `canopy_properties_type`:

```
! Integers
ncol           ! Number of columns
ntotlay        ! Total number of layers

! Allocatable integer vectors of length "ncol"
nlay           ! Number of layers in column (can be 0)
istartlay      ! Index to first layer of the column
i_representation ! Surface type (0-3)
```

```

! Allocatable real vectors of length "ncol"
cos_sza, ground_temperature

! Allocatable real vectors of length "ntotlay"
roof_temperature, wall_temperature, building_fraction, veg_fraction...

```

It can be seen that the variables describing properties as a function of height (e.g. wall temperature) are vectors of dimension `ntotlay`, expressing the total number of layers in this block of columns. The integer vectors `nlay` and `istartlay` enable the range of elements corresponding to the layers of a particular column to be identified. The `sw_spectral_properties_type` and `lw_spectral_properties_type` are packed similarly, except that each array has an additional `nspec` dimension expressing the number of shortwave or longwave spectral intervals.

Preparation of these three objects can be done as follows:

```

! Read modules defining the three derived types
use radsurf_canopy_properties,      only : canopy_properties_type
use radsurf_sw_spectral_properties, only : sw_spectral_properties_type
use radsurf_lw_spectral_properties, only : lw_spectral_properties_type

! Declare instances of these types
type(canopy_properties_type)      :: canopy_props
type(sw_spectral_properties_type) :: sw_spectral_props
type(lw_spectral_properties_type) :: lw_spectral_props

! Allocate canopy properties given existing configuration object "config", number of columns
! "ncol", total number of layers "ntotlay" and number of shortwave and longwave spectral
! intervals "nsw" and "nlw":
call canopy_props%allocate(config, ncol, ntotlay)
call sw_spectral_props%allocate(config, ncol, ntotlay, nsw)
call lw_spectral_props%allocate(config, ncol, ntotlay, nlw)

```

Subsequent code would then populate the arrays within these three objects using data from the host model (consult the files `radsurf_canopy_properties.F90`, `radsurf_sw_spectral_properties.F90` and `radsurf_lw_spectral_properties.F90` for precise contents of these arrays). Note that the offline driver program `driver/spartacus_surface_driver.F90` does not use these `allocate` type-bound procedures, but rather populates the arrays within the objects directly using the contents of the input netCDF file.

We also need to prepare objects to hold the output from the `radsurf` routine:

```

! Read modules defining the relevant derived types
use radsurf_boundary_conds_out,      only : boundary_conds_out_type
use radsurf_canopy_flux,             only : canopy_flux_type

! Declare an object holding the top-of-canopy boundary conditions presented to the atmosphere
! above
type(boundary_conds_out_type) :: bc_out
! Declare canopy flux components: the first three contain the fluxes and net absorption rates
! within the canopy normalized by the shortwave-diffuse, shortwave-direct and longwave
! downwelling flux at top-of-canopy. The fourth contains the same but purely due to internal
! longwave emission within the canopy
type(canopy_flux_type)        :: sw_norm_diff, sw_norm_dir, lw_norm, lw_internal

! Allocate these objects, noting that the shortwave objects use internal arrays to also store
! direct fluxes, not needed in the longwave
call bc_out%allocate(ncol, nsw, nlw)
call sw_norm_diff%allocate(config, ncol, ntotlay, nsw, use_direct=.true.)
call sw_norm_dir%allocate(config, ncol, ntotlay, nsw, use_direct=.true.)
call lw_internal%allocate(config, ncol, ntotlay, nlw, use_direct=.false.)
call lw_norm%allocate(config, ncol, ntotlay, nlw, use_direct=.false.)

! Optionally set all fluxes to zero
call sw_norm_dir%zero_all()
call sw_norm_diff%zero_all()
call lw_internal%zero_all()
call lw_norm%zero_all()

```

We are now in a position to call the `radsurf` routine:

```
! Read module defining the radsurf routine
use radsurf_interface, only : radsurf

! ...prepare the objects to pass to radsurf...

! Call the SPARTACUS-Surface radiation scheme
call radsurf(config, canopy_props, sw_spectral_props, lw_spectral_props, & ! Inputs
            & bc_out, & ! Outputs
            & istartcol, iendcol, & ! Optional inputs
            & sw_norm_dir, sw_norm_diff, lw_internal, lw_norm) ! Optional outputs
```

Optionally, a call to `radsurf` may specify the range of columns to process via `istartcol` and `iendcol`. This is useful for OpenMP parallelization: if the objects contain a large number of columns then `radsurf` can be called simultaneously by multiple threads, each thread being instructed to work on a different range of columns. This is done by the offline *SPARTACUS-Surface* driver. The final four canopy flux objects are marked as ‘optional’ because the `config` object may have specified to only perform shortwave or longwave radiative transfer, in which case only two such output objects would be needed.

The `boundary_conds_out_type` is fairly small, containing four arrays. The arrays `sw_albedo` and `sw_albedo_dir` are the shortwave spectral albedo at top-of-canopy presented to incoming diffuse and direct solar radiation, and are dimensioned `nsw×ncol`. The arrays `lw_emissivity` and `lw_emission` are the top-of-canopy longwave spectral emissivity and upward emission (in W m^{-2}), dimensioned `nlw×ncol`.

After the atmospheric radiative transfer calculation has completed using these arrays as boundary conditions, we need to use the downwelling fluxes at top-of-canopy to scale the normalized canopy fluxes.

```
! Declare objects to contain total (unnormalized) canopy fluxes
type(canopy_flux_type) :: lw_flux, sw_flux

! Allocate these objects
call sw_flux%allocate(config, ncol, ntotlay, nsw, use_direct=.true.)
call lw_flux%allocate(config, ncol, ntotlay, nlw, use_direct=.false.)

! Suppose the atmospheric radiative transfer scheme has provided three arrays of spectral
! downwelling radiation at top of canopy, top_flux_dn_diffuse_sw(nsw,ncol),
! top_flux_dn_direct_sw(nsw,ncol) and top_flux_dn_lw(nlw,ncol), we can use them to scale
! the normalized shortwave and longwave canopy fluxes, also taking as input the number of
! layers stored in each column, canopy_props%nlay
call sw_norm_diff%scale(canopy_props%nlay, top_flux_dn_diffuse_sw)
call sw_norm_dir%scale(canopy_props%nlay, top_flux_dn_direct_sw)
call lw_norm%scale(canopy_props%nlay, top_flux_dn_lw)

! Finally, sum the two contributions in each spectral region to obtain total (unnormalized)
! canopy fluxes
call sw_flux%sum(sw_norm_dir, sw_norm_diff)
call lw_flux%sum(lw_internal, lw_norm)
```

The contents of `sw_flux` and `lw_flux` are then available to use in a canopy energy balance scheme. See `radsurf_radsurf_canopy_flux.F90` for the precise contents of these objects. Note that at this stage they are still in the same spectral intervals as used by the *SPARTACUS-Surface* calculation. In the shortwave this is useful as it enables the photosynthetically active part of the spectral absorption by vegetation to be computed.

Further development is still needed on the spectral aspect of SPARTACUS-Surface. It is expected that in the shortwave, the radiation calculations will all be performed in the user-specified spectral intervals, and atmospheric extinction will either be ignored or it will be left to the user to provide atmospheric extinction coefficients, especially due to aerosols. It ought to be reasonable to neglect gas absorption and Rayleigh scattering since the Rayleigh optical depth is small through the limited depth of a surface canopy, and in the parts of the near-infrared spectrum where the gaseous absorption is large, little solar radiation is likely to penetrate down through the atmosphere to the top of the canopy.

In the longwave, there will need to be a mechanism to treat gaseous absorption given its importance (Hogan, 2019b). This could be implemented by mapping the user-specified longwave spectral intervals on to a larger

number of intervals suitable for longwave radiative transfer and running SPARTACUS-Surface at this spectral resolution. The larger number of intervals could then be passed to the atmospheric longwave radiative transfer. For the canopy energy balance model, only the broadband longwave fluxes are likely to be of interest, which could be computed by simply summing the fluxes along the `nlw` dimension.

8 License and copyright

The SPARTACUS-Surface software is copyright © 2019– ECMWF. This software is licensed under the terms of the Apache Licence Version 2.0 which can be obtained at <http://www.apache.org/licenses/LICENSE-2.0>. In applying this licence, ECMWF does not waive the privileges and immunities granted to it by virtue of its status as an intergovernmental organisation nor does it submit to any jurisdiction.

References

- Hogan, R. J., 2019a: An exponential model of urban geometry for use in radiative transfer applications. *Boundary-Layer Meteorol.*, **170**, 357–472.
- Hogan, R. J., 2019b: Flexible treatment of radiative transfer in complex urban canopies for use in weather and climate models. *Boundary-Layer Meteorol.*, **173**, 53–78.
- Hogan, R. J., T. Quaife and R. Braghieri, 2018: Fast matrix treatment of 3-D radiative transfer in vegetation canopies: SPARTACUS-Vegetation 1.1. *Geosci. Model Dev.*, **11**, 339–350.
- Hogan, R. J., S. A. K. Schäfer, C. Klinger, J.-C. Chiu and B. Mayer, 2016: Representing 3D cloud-radiation effects in two-stream schemes: 2. Matrix formulation and broadband evaluation. *J. Geophys. Res.*, **121**, 8583–8599.
- Shonk, J. K. P., and R. J. Hogan, 2008: Tripleclouds: an efficient method for representing horizontal cloud inhomogeneity in 1D radiation schemes by using three regions at each height. *J. Climate*, **21**, 2352–2370.
- Stamnes K., S. C. Tsay, W. Wiscombe and K. Jayaweera, 1988: Numerically stable algorithm for discrete-ordinate-method radiative transfer in multiple scattering and emitting layered media. *Appl. Opt.*, **27**, 2502–2509.