

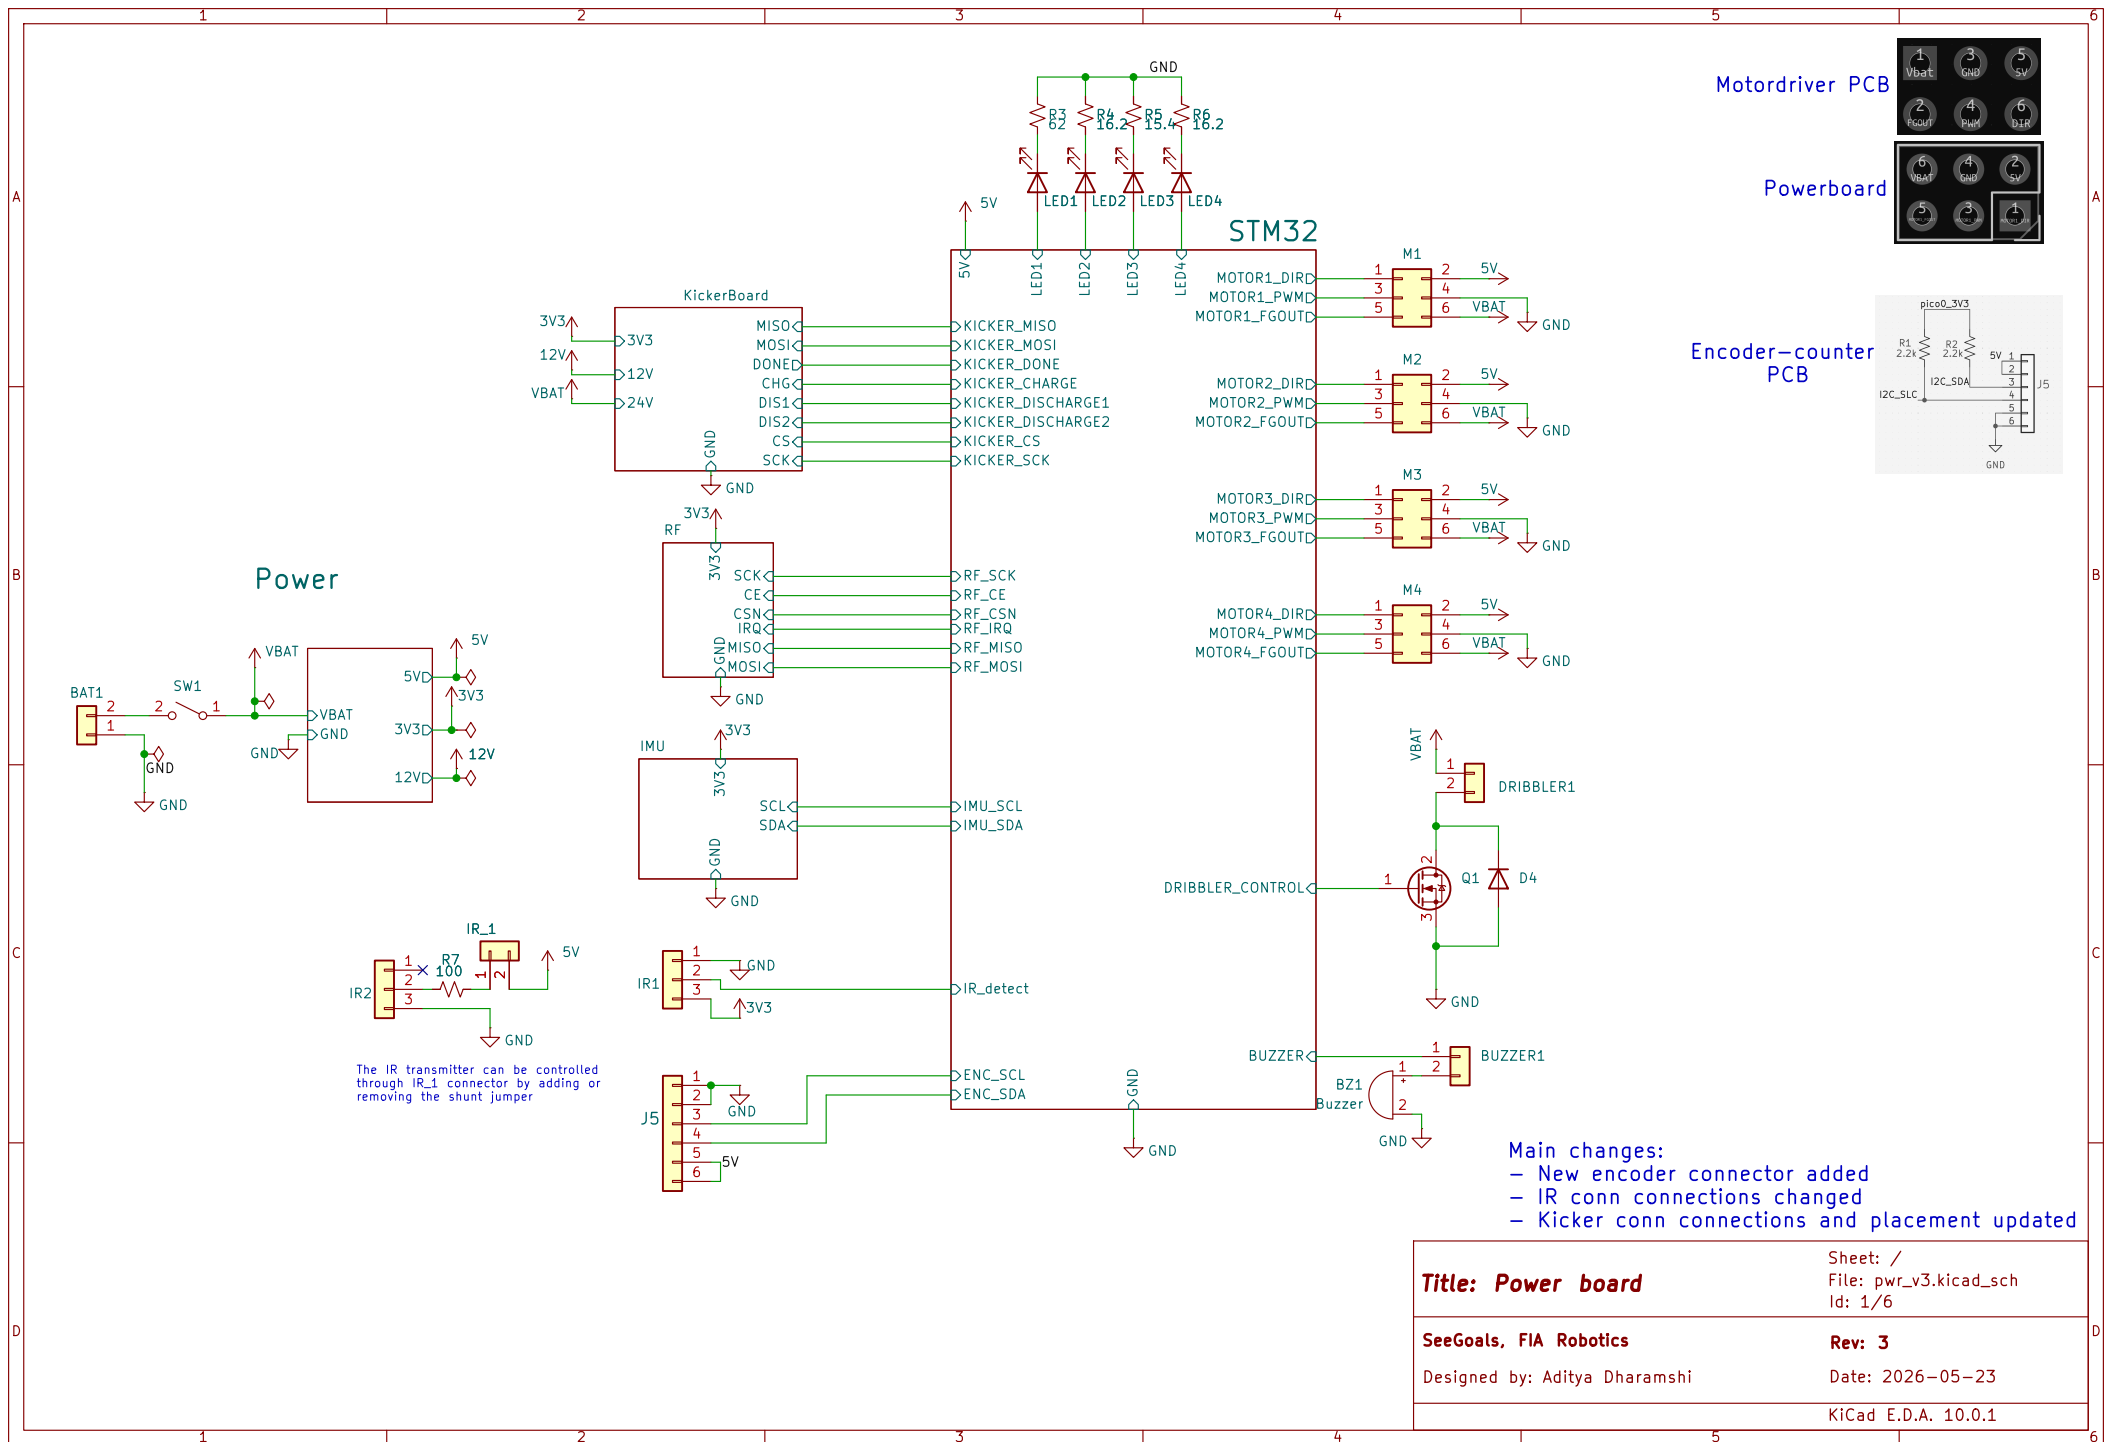
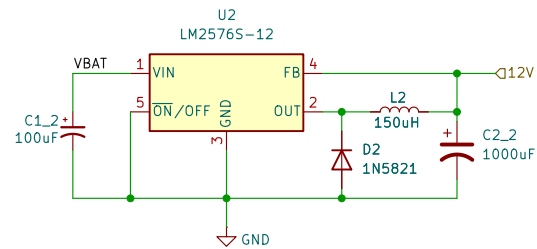


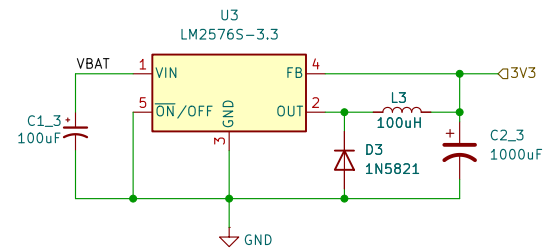

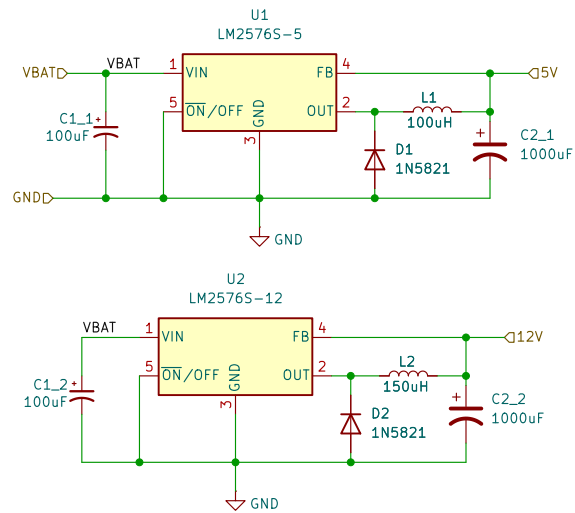

Buck convertors for supplying 3.3V, 5V and 12V

**Title:** pwr\_v2

Sheet: /Power/  
File: pwrmgmt\_sch.kicad\_sch  
Id: 2/6

**SeeGoals, FIA Robotics**




**Rev: 3**

Designed by: Aditya Dharamshi

Date: 2026-05-23

KiCad E.D.A. 10.0.1



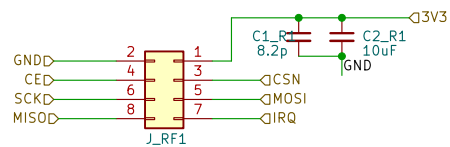

#### nRF connector

**Title: pwr\_v2**

Sheet: /RF/  
File: rf.kicad\_sch  
Id: 4/6


**SeeGoals, FIA Robotics**

**Rev: 3**


Designed by: Aditya Dharamshi

Date: 2026-05-23

KiCad E.D.A. 10.0.1

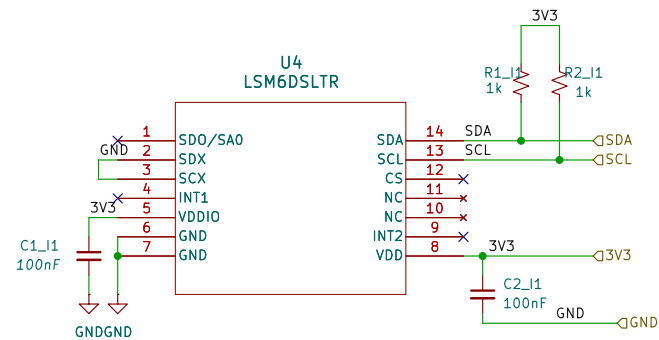

CS-0 : SPI mode  
CS-1 : I2C mode (default internal setup)



IMU circuit in I2C mode

**Title:** pwr\_v2

Sheet: /IMU/  
File: imu.kicad\_sch  
Id: 5/6


**SeeGoals, FIA Robotics**

**Rev: 3**

Designed by: Aditya Dharamshi

Date: 2026-05-23

KiCad E.D.A. 10.0.1

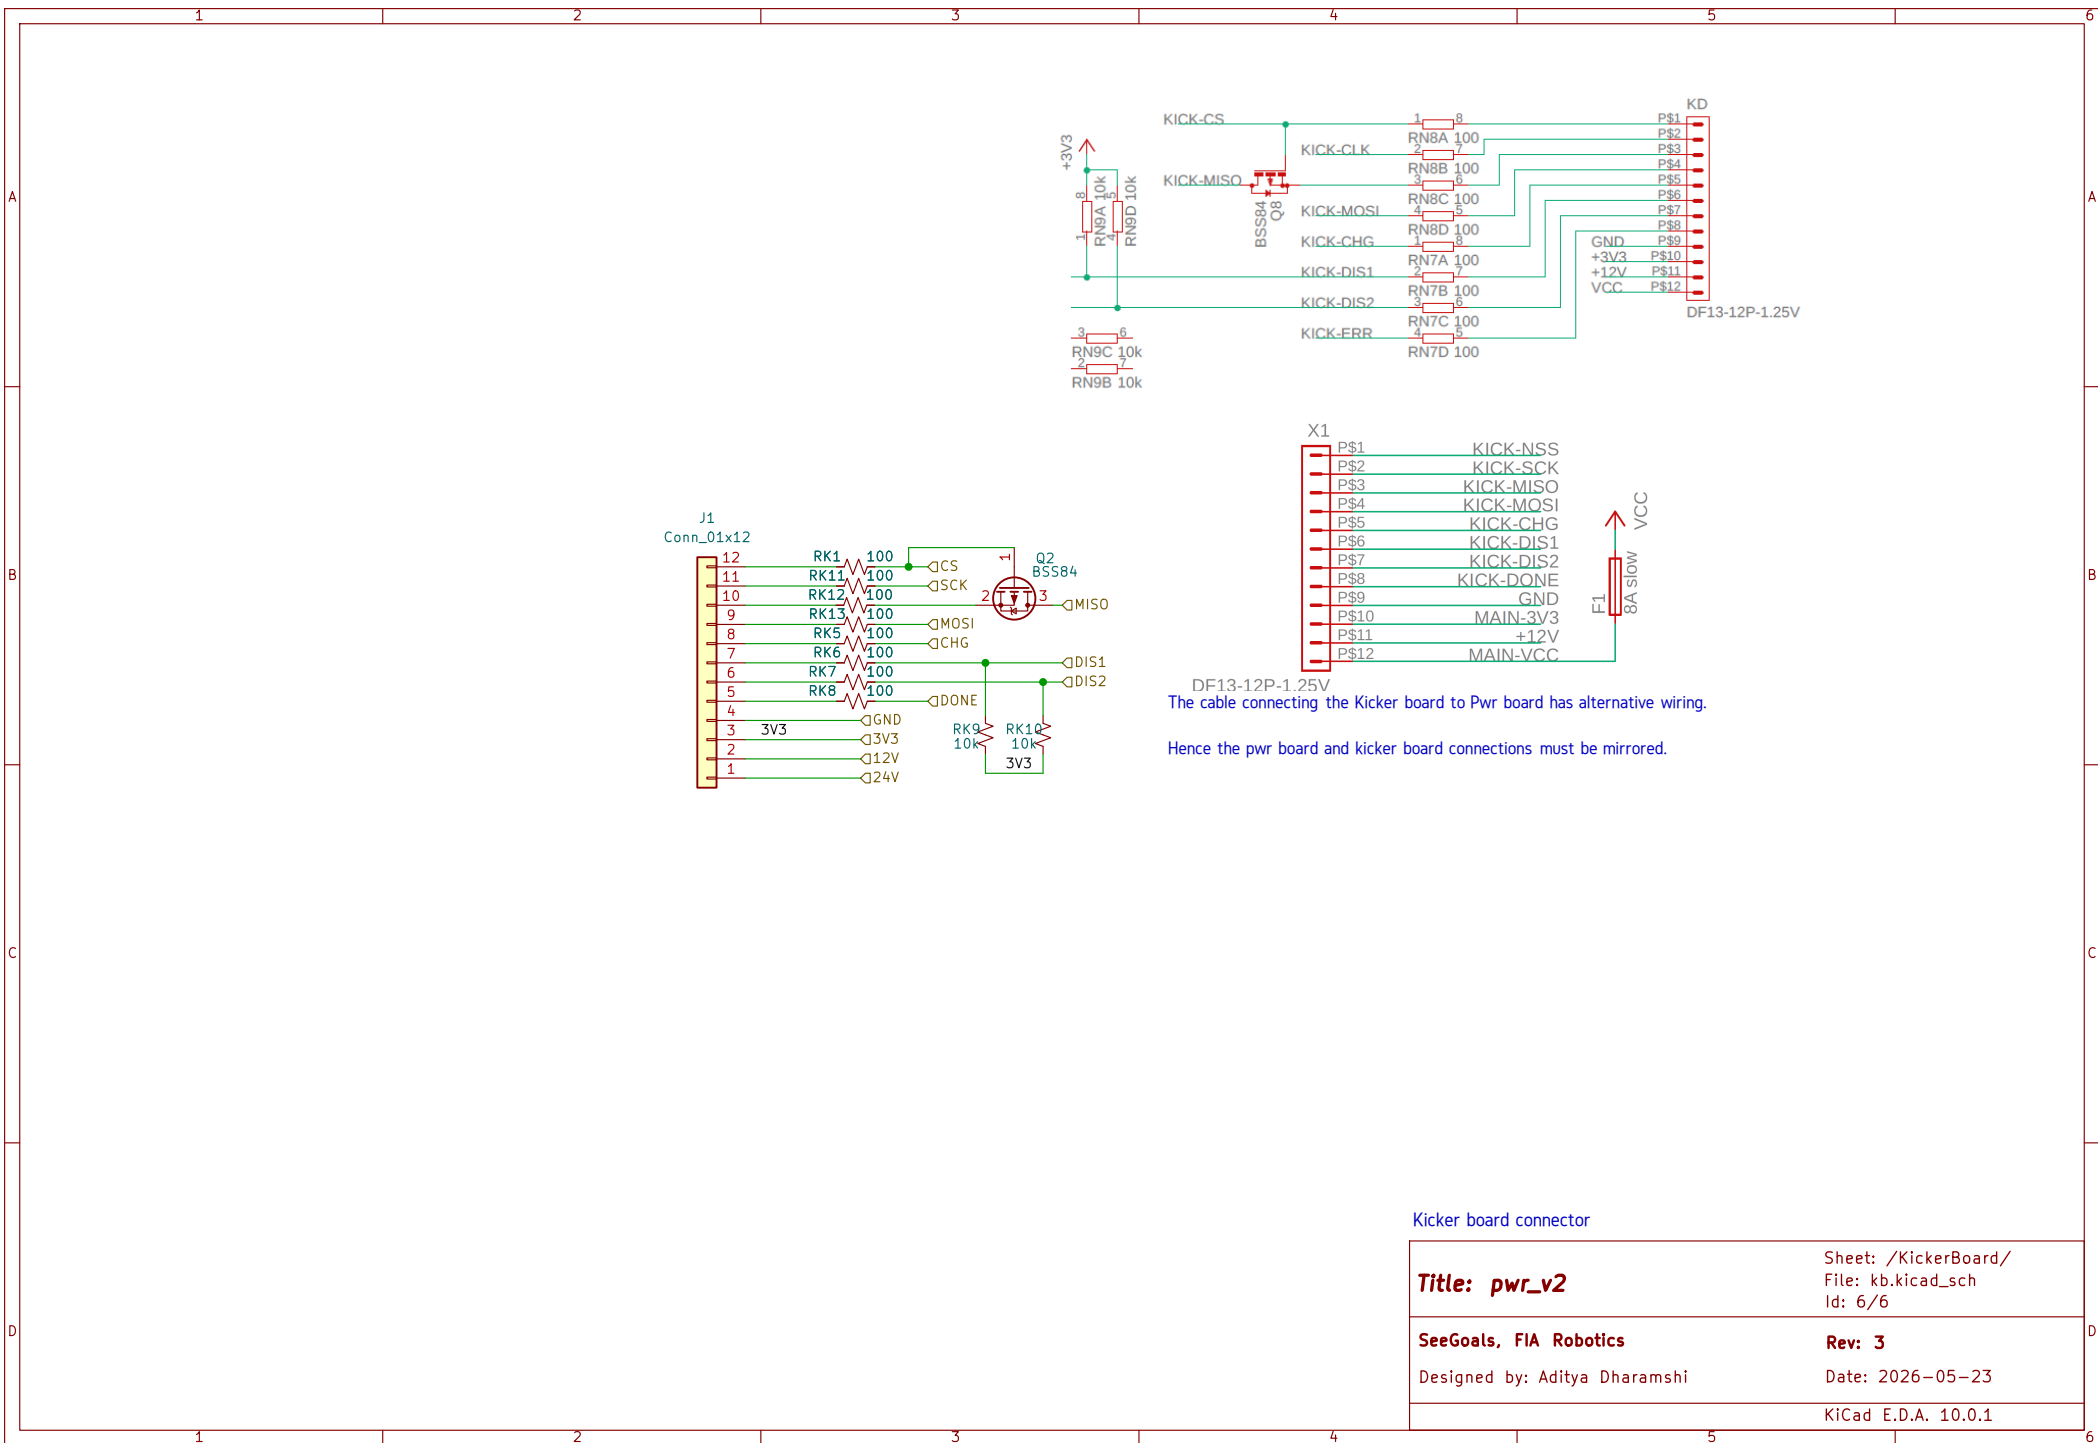

DF13-12P-1.25V  
The cable connecting the Kicker board to Pwr board has alternative wiring.  
Hence the pwr board and kicker board connections must be mirrored.

Kicker board connector

|                               |  |                                                       |
|-------------------------------|--|-------------------------------------------------------|
| <b>Title: pwr_v2</b>          |  | Sheet: /KickerBoard/<br>File: kb.kicad_sch<br>Id: 6/6 |
| <b>SeeGoals, FIA Robotics</b> |  | <b>Rev: 3</b>                                         |
| Designed by: Aditya Dharamshi |  | Date: 2026-05-23                                      |
|                               |  | KiCad E.D.A. 10.0.1                                   |