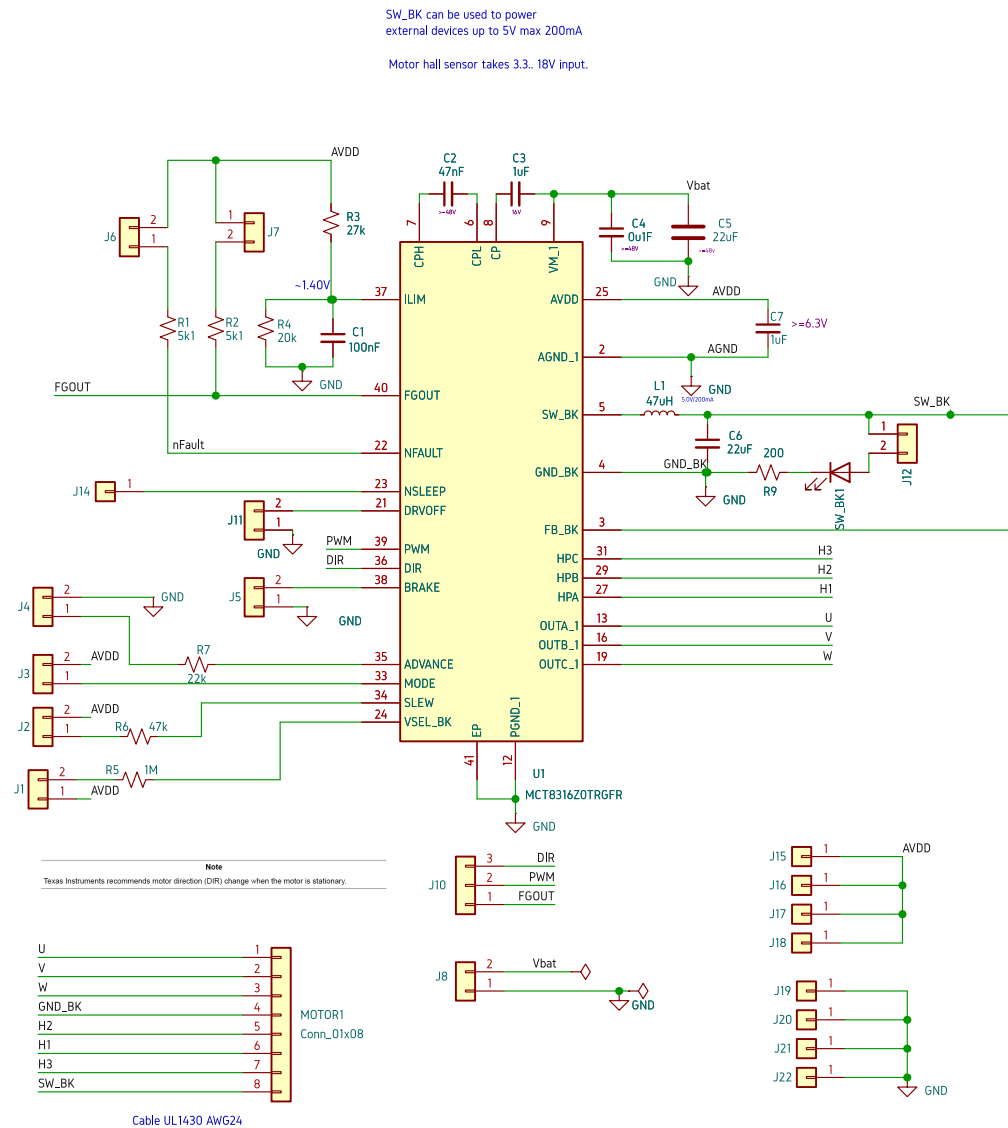


Figure 6-2. MCT8316ZT-Q1 40-Pin VQFN With Exposed Thermal Pad Top View

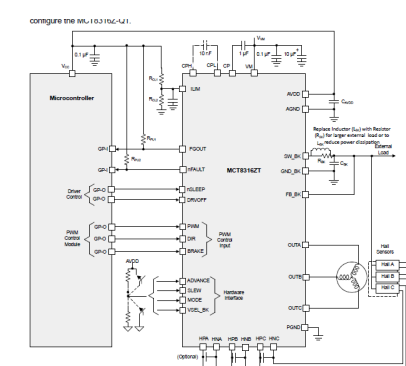


Figure 9-1. Primary Application Schematics for MCT8316ZT-Q1 (hardware variant)

This board is to evaluate the various operational modes available in the motor driver. They are set by connecting them either to Vcc or Gnd. 2.54mm jumper wires and jumper connectors can be used to evaluate.

Title: Motor driver evaluation board	Sheet: /
	File: md_eval.v1.kicad_sch
SeeGoals, FIA Robotics	Id: 1/1
Designed by: Aditya Dharamshi	Rev: 1
	Date: 24-07-2025
	KiCad E.D.A. 9.0.7