




SW_BK can be used to power
external devices up to 5V max 200mA
Motor hall sensor takes 3.3.. 18V input.

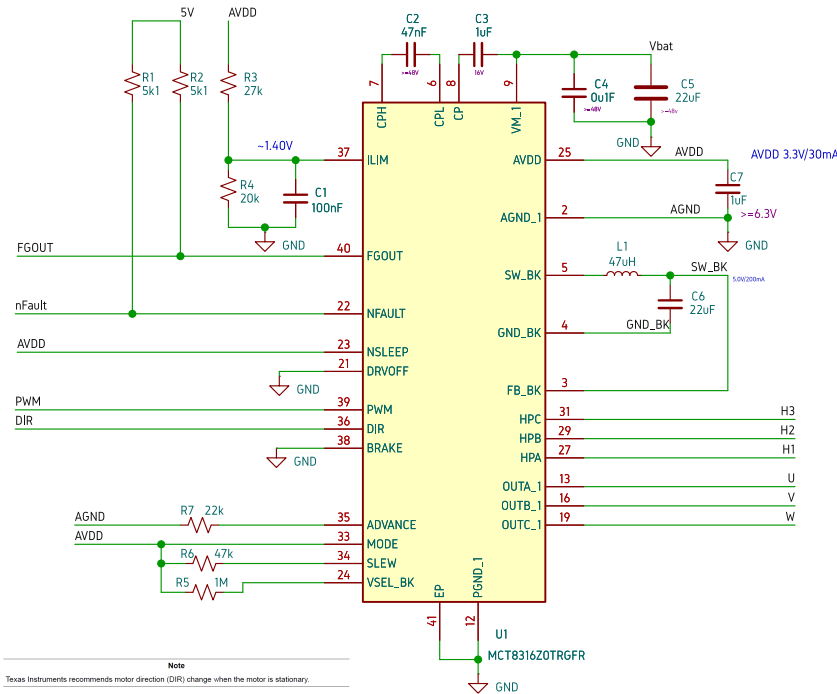

Motor: Nanotech DF45L024048-A2

Connectors: WR-WTB 2.54 mm Male Locking Header on this PCB.
WR-WTB 2.54 mm Female Locking Header on the motor cable



Connector for pwr board

This motor driver PCB is interface between pwr_v2 and motor.
Reference schematic by Anton Östman

Title: Motor driver for pwr_v2	Sheet: /
	File: md_v1.kicad_sch
	Id: 1/1
SeeGoals, FIA Robotics	Rev: A
Designed by: Aditya Dharamshi	Date: 18-05-2025
KiCad E.D.A. 9.0.7	