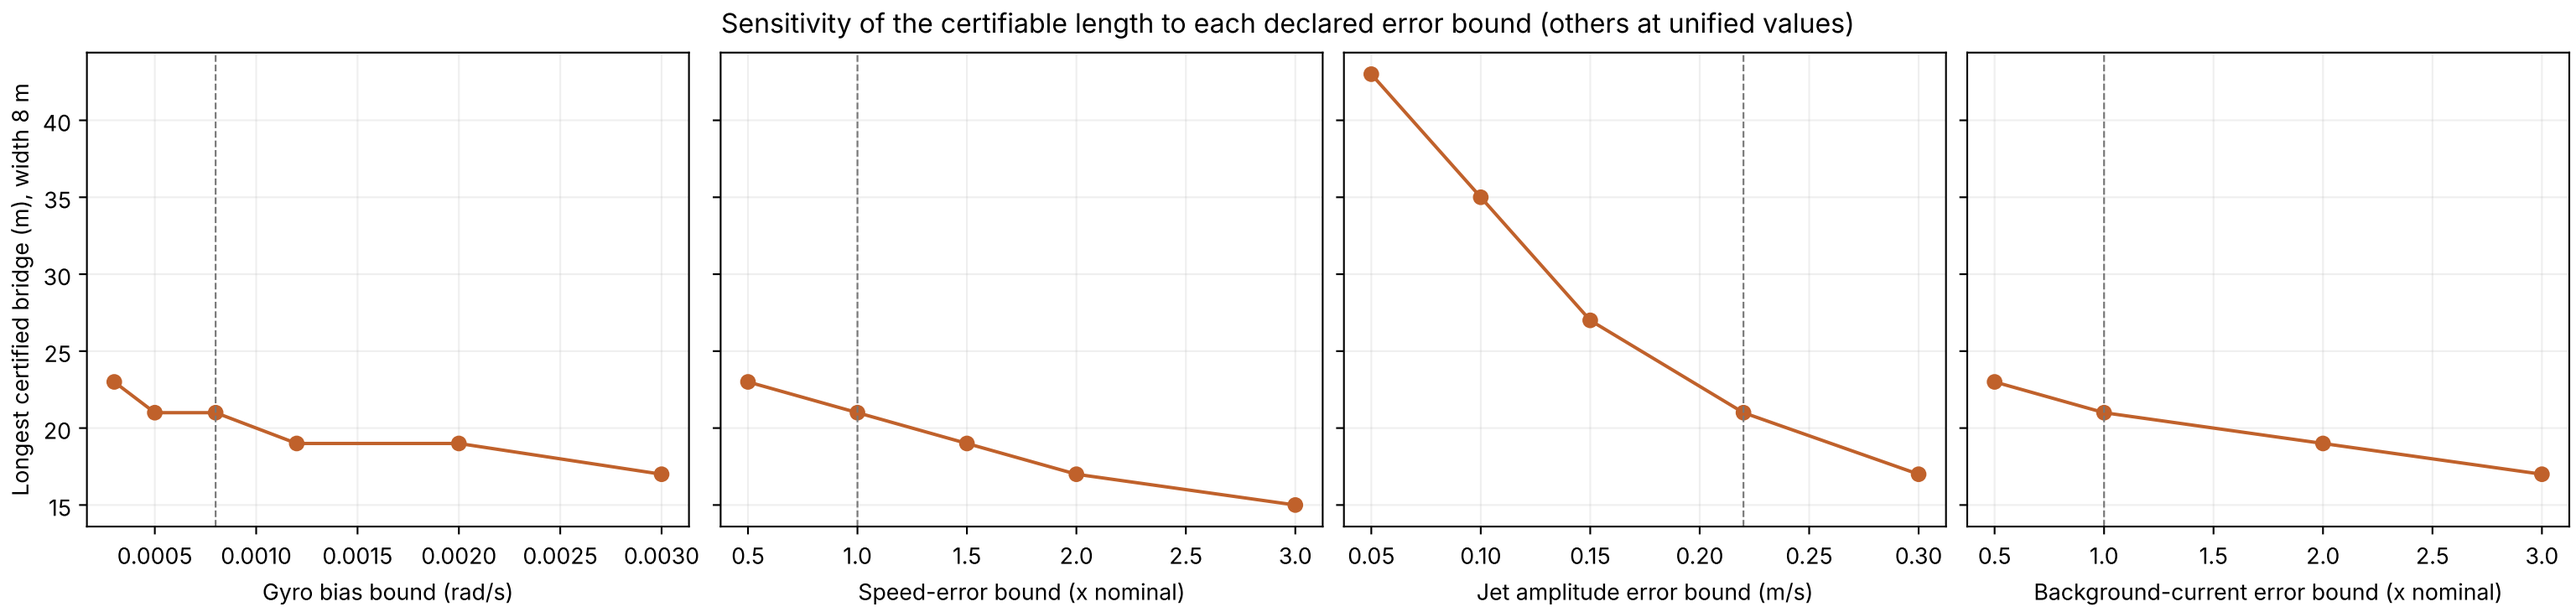
Sensitivity of the certifiable length to each declared error bound (others at unified values)
Longest certified bridge (m), width 8 m
40
35
30
25
20
15
0.0005
0.0010
0.0015
0.0020
0.0025
0.0030
Gyro bias bound (rad/s)
0.5
1.0
1.5
2.0
2.5
3.0
Speed-error bound (x nominal)
0.05
0.10
0.15
0.20
0.25
0.30
Jet amplitude error bound (m/s)
0.5
1.0
1.5
2.0
2.5
3.0
Background-current error bound (x nominal)