

Integrated Ground Control Station (GCS)

DISTINCT FEATURES

SINGLE MODEM TRANSMISSION
Control and telemetry are transmitted through a single modem rather than a separate arrangement.


NUMEROUS CONNECTING PORTS
Variety of connecting options including an ethernet jack for expandability and HDMI video output.

STREAM TELEMETRY TO MULTIPLE DEVICES
Built-in access point provides a wireless telemetry bridge to the centrally mounted tablet or other nearby smart devices or PCs.

COMFORTABLE ERGONOMIC DESIGN
Textured, ergonomically-designed control casing for an optimized, comfortable grip.


COMPATIBILITY

The Integrated Ground Controller is directly compatible with air vehicles using Ardupilot and PX4 firmware. It is generally compatible with any flight controller which uses PPM for R/C control and the MAVLINK messaging protocol for telemetry. On the ground side, telemetry can be streamed to a number of ground station applications such as Hitec Mission Control, Mission Planner, QGroundControl and Solex.

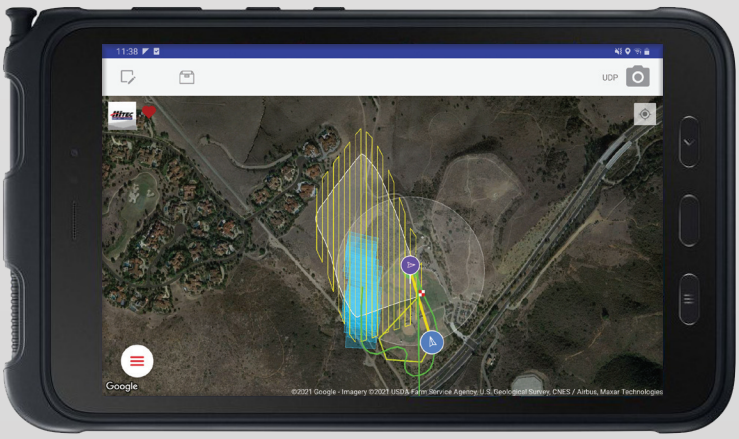

HIGH-PRECISION MAPPING DATA ACQUISITION APP

- High-Precision Data Acquisition (DAQ) App
- Intuitive Layout on Easy-To-Use Tablet
- Simulate Complete Missions in Advance or On Location
- Monitor Mission Parameters of Vehicle and Payload
- Updateable for Future Payloads, Vehicles and Criteria
- Fast Image Pre-Processing / Pre-Stitching Capabilities
- Ability to Store and Share Missions and Data
- Direct Upload to Post Processors from App
- Previous Mapping Drone Experience Not Required

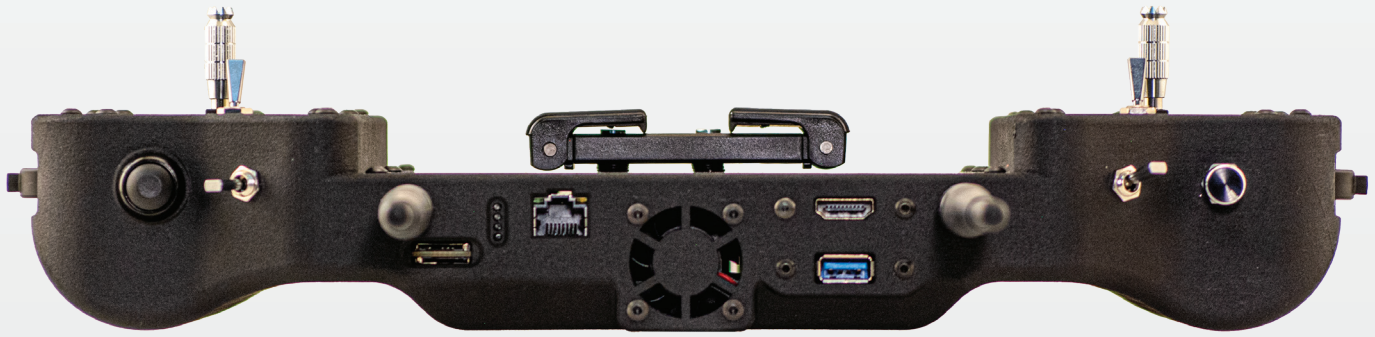

TECHNICAL SPECIFICATIONS

Proportional R/C Inputs	Hall Effect Gimbals (2x) Side-mounted Proportional Toggles (2x) Rotary Potentiometer (1x)
Switch Inputs	2-Position Switches (2x) 3-Position Switch (1x) 3-Way Momentary Rocker (1x) Momentary Button (1x)
Radio Modem	Microhard pMDDL
Encryption	128-bit AES (Optional 256-bit AES Available)
Battery	Internal Li-Ion with Built-in Battery Management System
Battery Life	6-7h Continuous Use
Tablet Size Supported	8" Screen Size Typical (150mm Max Width in Portrait Mode)
Mount Provisions	Back-mounted ¼"-20 Threads for Belt or Harness Mount

CUSTOMIZABLE OPTIONS FOR OEM APPLICATIONS

- Microhard pMDDL Version Supporting v Full Motion Video Streaming
- Data Link and Access Point Security
- Telemetry Stream Configuration
- R/C Channel Count, Order, Scaling, Mixing and Special Functions
- Switch Type and Layout
- Printed Labeling and Branding

GCS PACKAGES

GCS w/MICROHARD 2.4GHz
For High-Quality Video Streaming

GCS w/.MICROHARD 2.4GHz & MIMO 2.4GHz Picoradio
Includes Air-Side Radio Modem

CONTACT FOR PRICING*

*Prices are subject to change based on technology improvements and material sourcing. Base pricing does not include setup, training or repair contracts.

★ US-Based Customer Service, Support & Training ★

HITEC COMMERCIAL SOLUTIONS

SHAWN SPIKER / GENERAL SALES MANAGER
9320 Hazard Way, Suite D, San Diego, CA 92123
shawn.spiker@hiteccs.com | www.hiteccs.com

HITEC DRONE SERVICES