Specification

T50 Ground Control Station



The last update time: March-14th-2024

Catalog

01 Product Introdution

02 Features

03 Parameters

04 Interfaces

05 RC Configuraton Software

06 Product Dimension

07 Communication Links

08 Application Scenarios

09 Product Real Photos

10 Demo Videos

01 Product Introduction

T50



Introducing the T50 Ground Control Station (GCS) – a powerhouse of precision and reliability.

Driven by an Intel i7 12-core CPU, T50 is a powerful choice for users seeking top-tier processing capabilities for professional and resource-intensive applications. Our in-house developed, fully integrated design ensures seamless synergy and unparalleled dependability, setting it apart from conventional GCS solutions.

Sleek, waterproof, and rigorously tested, the T50 GCS excels in professional and defense missions. Elevate your capabilities with a GCS crafted for success.

i7 1260P CPU

Superior computing power

High integration

Not a pieced-together product

Long remote control range

150km+

02

Features



Robust Computing Power

Equipped with an **INTEL i7 12-core CPU**, ensuring exceptional processing power and multitasking capabilities



Highly Integrated System

R&D totally in-house, our components stand out from the simple connections of off-the-shelf parts used by other manufacturers, ensuring superior compatibility and reliability.



Innovative Damping Design

Breaks away from traditional support rod solutions, it delivers a more stable support structure.

02

Features



High Visibility Screen

Utilizes **Optical Binding** technology for a screen that remains clear and readable even in direct sunlight, coupled with dual touchscreens for enhanced flexibility.



Enhanced Nighttime Visibility and Utility

Integrates **dual light columns** on both sides for improved visibility and convenience during nighttime operations.



Exquisite Design

Smooth panel without visible screws and connection cables, **waterproof** interface design, combining sophistication with practicality.

02

Features



Multifunctional Keyboard

Keyboard can be with a **mouse** for additional control options, enhancing user convenience.



Precise Control

Features **retractable three-axis joystick with hall-effect**, providing a precise control experience.



Enhanced Security

Increased security with **protective caps** on buttons, improving device safety and resistance to damage.

02

Features



Storage Compartments

Specifically crafted for storing batteries, a mouse, and assorted items.



Multi-Interface Design

Device supports multiple interfaces, allowing easy adaptation to our video links and third-party devices, expanding device applicability.




Convenient External Connectivity

Equipped with **HDMI, LAN, USB** connectors, supporting external device connections, providing more flexible external connection options.

02

Features

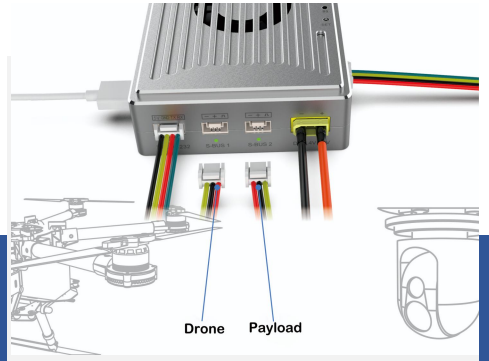

Dual SBUS input and output

Able to control **the vehicle** and **its payload**



Various video links for choice

5-150km video link, mesh video link





Linux

Operating system

Windows11, Linux

03 Parameters

Dimension	
Screen size	2*17inch
Weight	20kg/44Ibs (including battery 2.8kg/6.2Ibs)
Dimension	85cm(L)*42.5cm(W)*16cm(H) 33.5inch(L)*16.7incn(W)*6.3inch(H)


Battery Peripherals	
Battery capacity	Built-in 25.2V/30000mAh Li-ion battery (other capacity, external power source also supported)
Working time	5hs@full battery capacity
Charging port	DC25.2v IN

Environmental performance	
Operating Temperature	-20℃-+60℃
IP rating	IP53(in open status) IP65(in closed status)

Computer	
CPU	i7 1260P Core
Graphics	Intel® Iris® Xe Graphics eligible 1.40 GHz
Touchpad	10-point capacitive touch pad
Display screen	17inch 1280*1024 1000NIT
RAM	32GB(standard)
Storage	1TB SSD(standard)
Network	Wireless Dual band WiFi and Bluetooth
Operating system	Windows11 or Linux

Remote control	
Physical channel (27)	Main joystick*2 Knob*2 Key button*12 3-position switch*4 2-position switch*2 Stop button*1
Human interface	USB HID device
Remote control function	Dual SBUS independent output
SBUS port	SBUS OUT*2, SBUS IN*1
Remote control latency	40ms


04 Interfaces

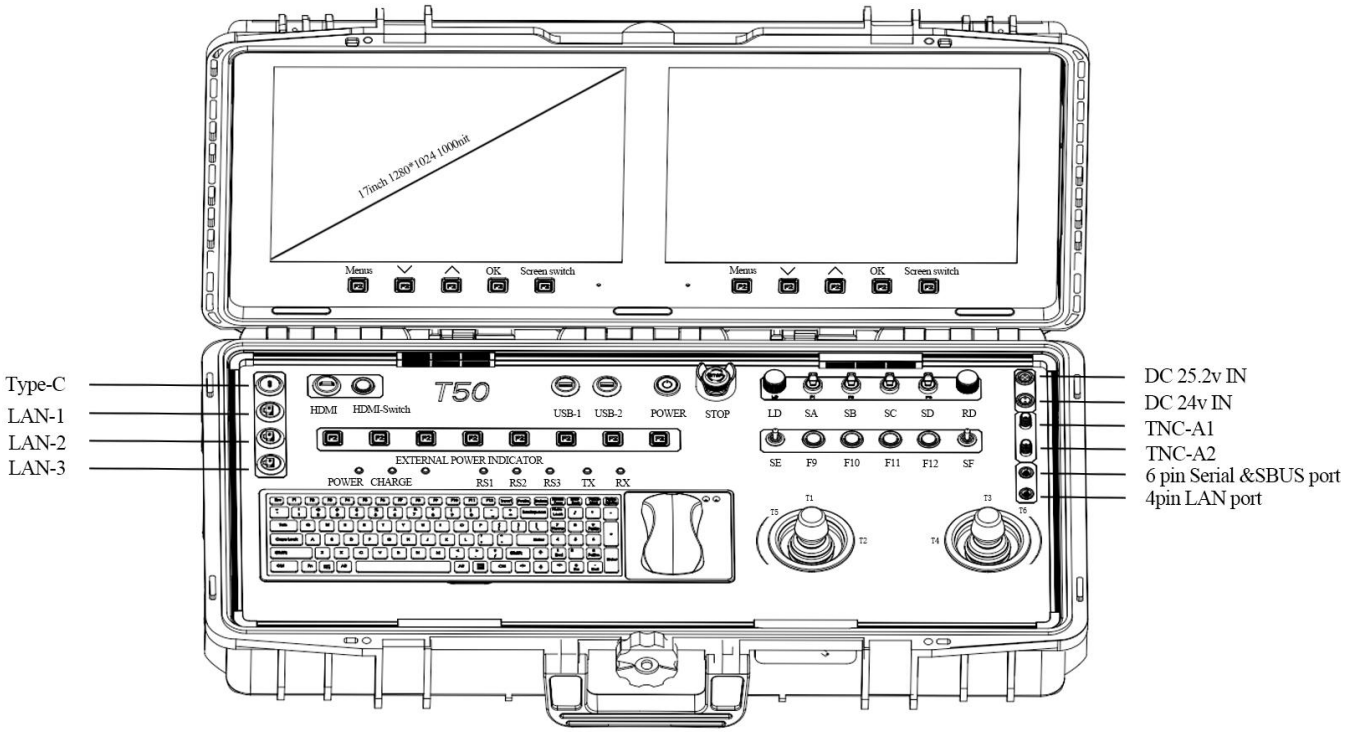


Interfaces	
Left side	* 1 x TYPE-C * 3 x LAN Port * 1 x HDMI * 1 x HDMI switch(close the upper screens) * 2x USB * 1 x Power button * 1 x STOP button * 8 x Key button(F1~F8) * 1 x Power indicator * 1 x Charge indicator * 3 x Radio link signal indicator(RS1 RS2 RS3) * 2 x Radio Link working status indicator(TX RX) * 1 x Keyboard with mouse
Right side	* 2 x Knob(LD RD) * 6 x Toggle switch(SA SB SC SD SE SF) * 4 x Key button(F9 F10 F11 F12) * 1 x DC25.2V IN * 1 x DC24V IN * 2 x TNC connector(A1 A2) * 1 x 6PIN aviation socket(1 serial & 2 SBUS) * 1 x 4PIN aviation socket(LAN port) * 2 x Telescopic Hall Effect Joystick

05

RC Configuration Software

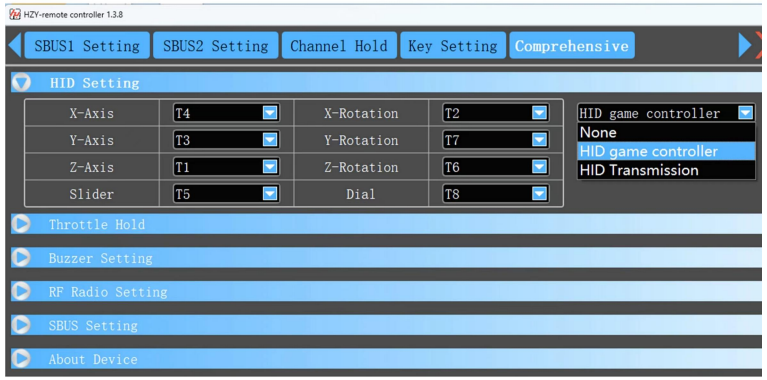

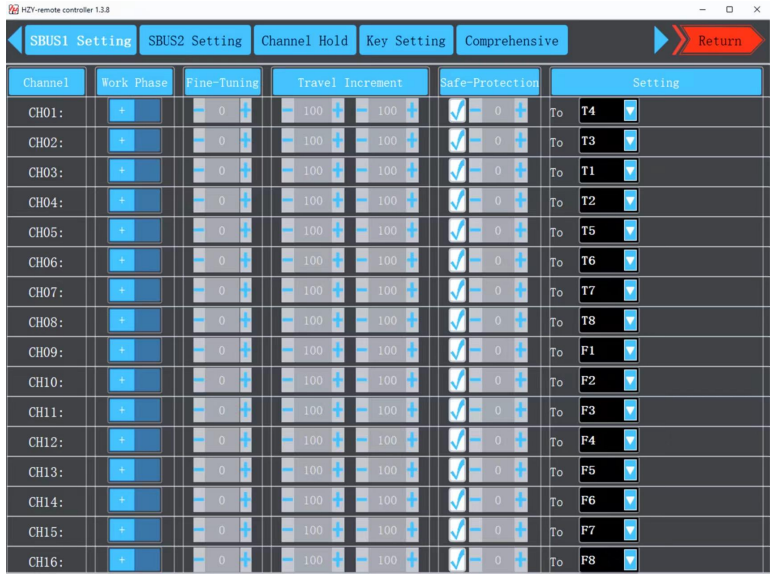



USB HID function

Able to interface with external devices or software

User-configured RC system

SBUS channels freely mapping to physical channels

Multiple programming modes for RC system

Key combination, key property setting

06 Product Dimension






07

Communication Links

P/N	Photo	Description	Range	Frequency	Bandwidth	Network	Max node
V21		Video&telemetry&RC link	15km	806-826MHz 1427.9-1467.9MHz 2401.5-2481.5MHz	20Mbps	Star topology	16
V31		Video&telemetry&RC link	5km(ground to ground) 20km/30km/80km/150km	806-826 MHz 1427.9-1467.9MHz	20Mbps	Star topology	16
VX10		4K video link	20km	566-678MHz 1420-1530MHz	100Mbps	Star topology	64
VM21		Mesh video link	10km	806-826MHz 1427.9-1467.9MHz 2401.5-2481.5MHz	20Mbps	Mesh	16
VM31		Mesh video link	15km/50km	806-826 MHz 1427.9-1467.9MHz	20Mbps	Mesh	16
M1		4K Mesh video link	20km	566-678MHz 1420-1530MHz	100Mbps	Mesh	32



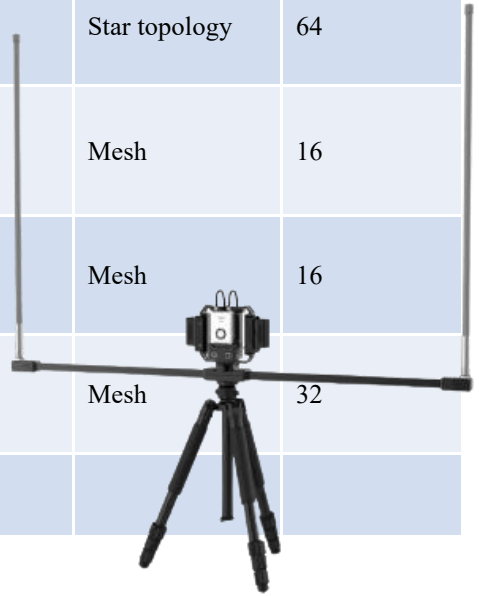

* The other brand video links are also supported.

08 Application Scenarios



Logistic



Surveillance



Emergency rescue



Mapping and surveying



Firefighting



Reconnaissance



Marine survey



Marine reconnaissance

09 Product Real Photos





10 Demo Videos

No.	Description	Video Link
1	**T50 retractable three-axis joystick with hall-effect**	https://youtu.be/6N1w7Bo1RHM
2	**T50 GCS dual-person operation demonstration**	https://youtu.be/miyhT0KZa8E

Thank you!

Unlock Possibilities, Let's Discuss Your Needs - Contact Us Today!

Chinowing Technology Co., Ltd

www.chinowing.com

office: +86 0755-21386581