

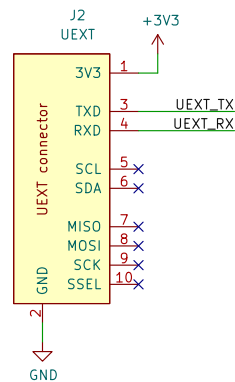


Host MCU connection

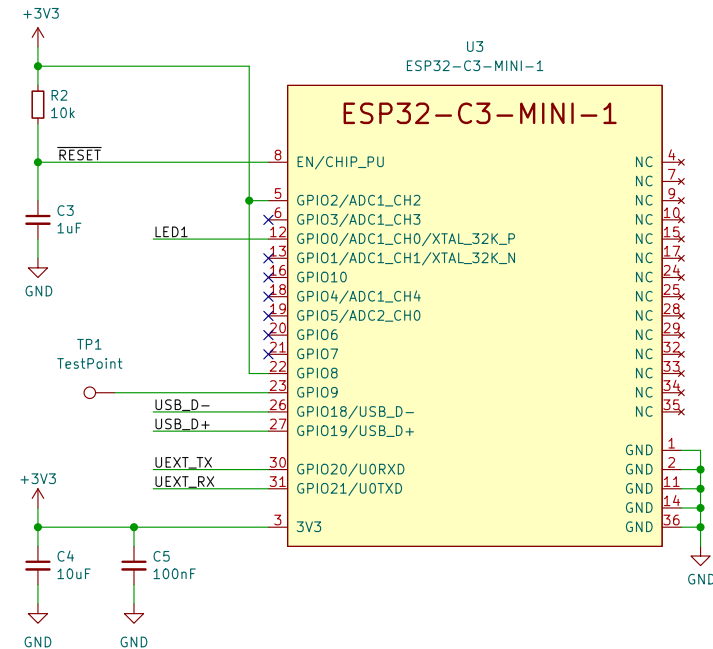



3V3 power supply during programming

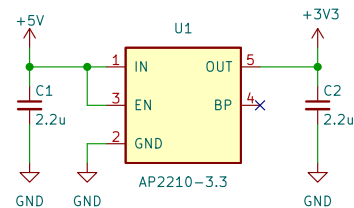

Strapping pins GPIO2 and GPIO8 directly connected to VCC w/o pull-up resistor as we don't need to use pins for I/O.

GPIO9 can be used to enter bootloader mode to un-brick a board.



ESP32-C3 to UEXT Adapter		
Libre Solar Technologies GmbH Author: Martin Jäger		Website: https://libre.solar LIBRESOLAR
Sheet: / File: uext-esp32-c3.kicad_sch		
License: Creative Commons Attribution-ShareAlike 4.0 International		
Size: A4	Date: 2023-01-02	Rev: 0.1
KiCad E.D.A. kicad (6.0.9)		Page: 1/1