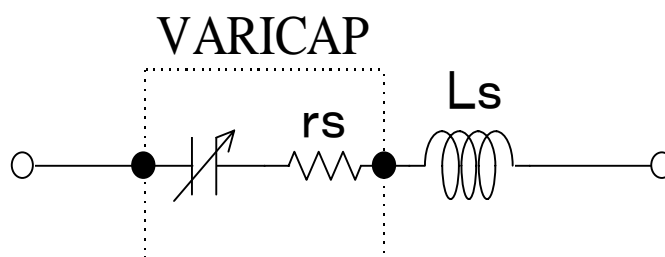SPICE MODEL: BERKLEY SPICE2G6 DIODE MODEL
DATA FORMAT: MODEL FORMAT
SPICE SYMBOL: IS(A) ,RS(Ω) ,N(-) ,CJ0(F) ,VJ(V) ,M(-) ,BV(V) ,IBV(A)
FREQUENCY RANGE: f = 0.1 GHz～3 GHz
REVERSE VOLTAGE RANGE: VR = 1 ～ 4V
AMBIENT TEMPERATURE: Ta = 27°C
PARAMETER

IS	=	2.593E−15
N	=	1.024
BV	=	10
IBV	=	1.00E−04
RS	=	0.4
CJ0	=	7.672E−11
VJ	=	100
M	=	49.19

Ls	=	1.00E−09

VARICAP


Note 1: These parameters show all die characteristics except Ls.
In practice the device exhibits lead inductance, hence Ls is necessary for simulation.

Note 2: The RS value shown is for when VR = 4 V and f = 100 MHz.
For the RS value under other conditions, refer to the Rs-VR curve in these datasheets.

Note 3: These parameters do not take into account the part of the lead which lies outside the
reference plane when the device is mounted on the circuit board.

(a) Flat lead   (b) Gull−wing lead
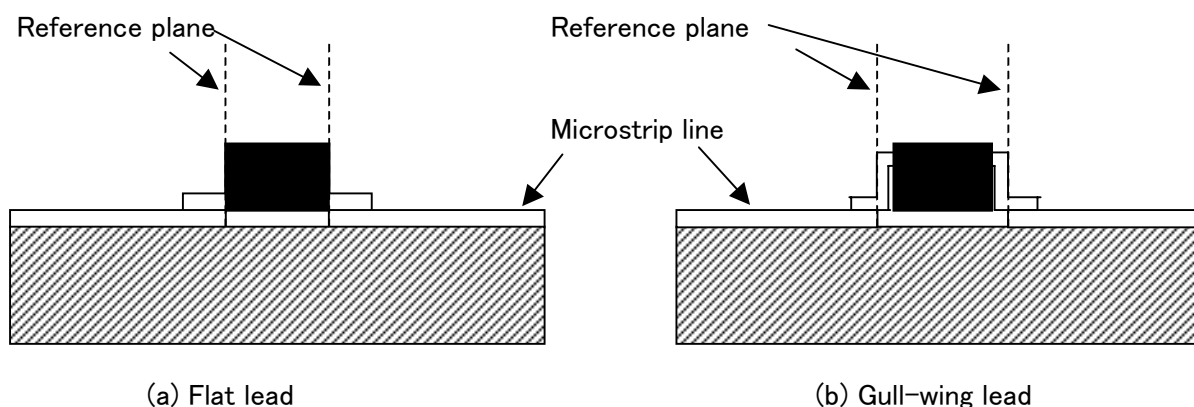
Side view of mounted device

Note 4: The measurements shown in this document are given only as sample
characteristics. Moreover, these sample parameters are not guaranteed for when the device is
used in the mass production of equipment, since the high-frequency (AC) characteristics of these
devices will be affected by the external components which the customer uses, by the design of the
circuit and by various other conditions. It is the responsibility of the customer to check the
characteristics of a design. Toshiba assumes no responsibility for the integrity of customer
circuit designs or applications.