

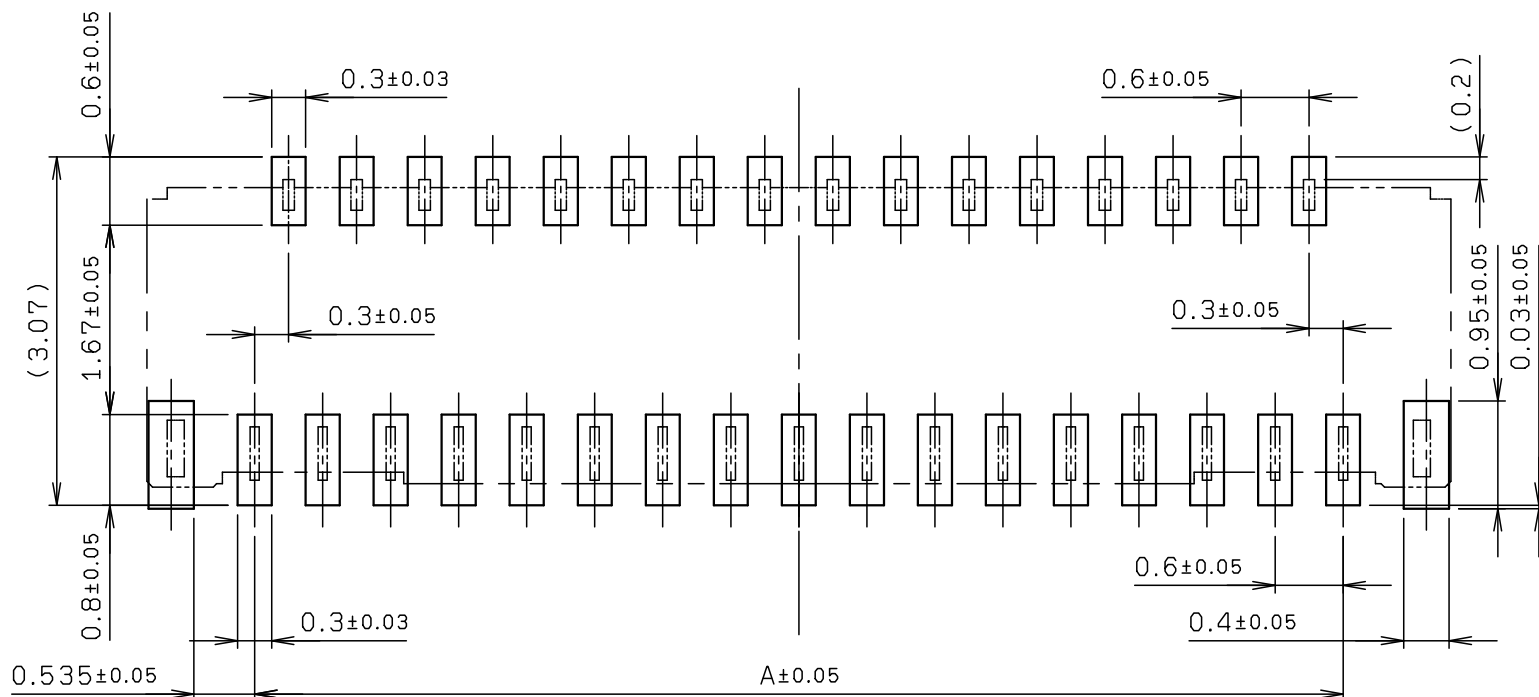
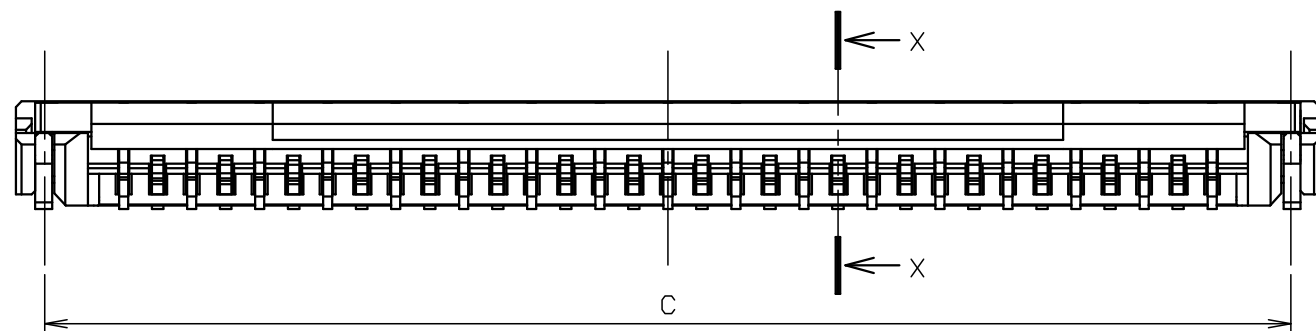
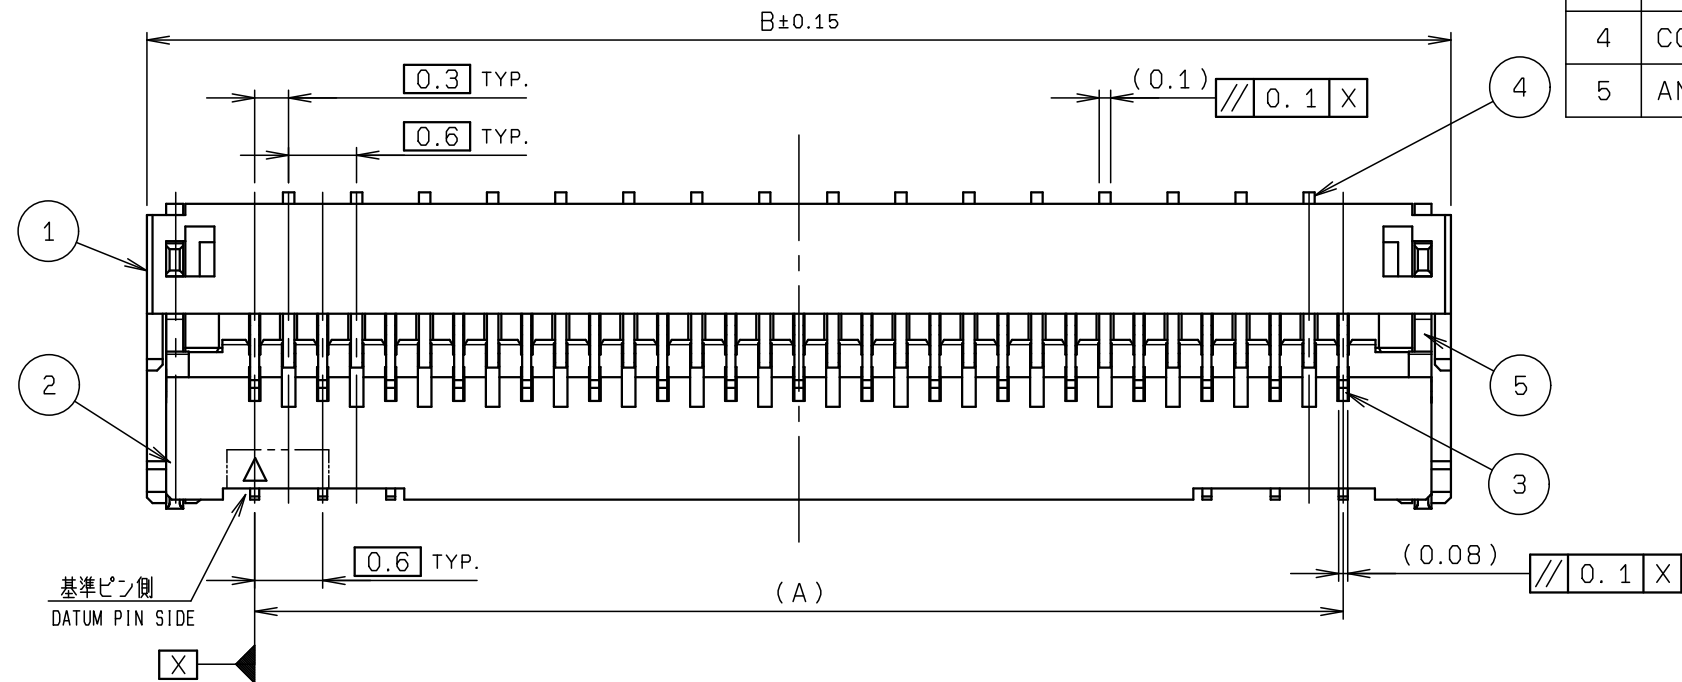


51P未満

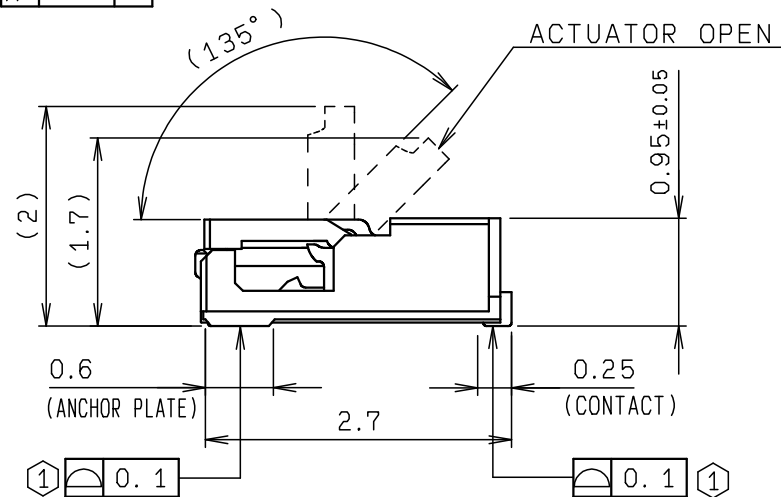

基板取付寸法
MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK
3	CONTACT (FRONT TYPE)		$\frac{N+1}{2}$	PHOS-BRONZE		
4	CONTACT (REAR TYPE)		$\frac{N-1}{2}$	PHOS-BRONZE		
5	ANCHOR PLATE		2	PHOS-BRONZE		

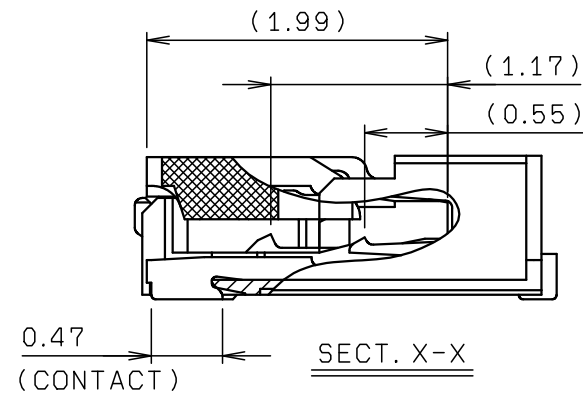

極数 NO. OF POS.	A	B	C
11	3.0	4.9	4.39
13	3.6	5.5	4.99
15	4.2	6.1	5.59
17	4.8	6.7	6.19
19	5.4	7.3	6.79
21	6.0	7.9	7.39
23	6.6	8.5	7.99
25	7.2	9.1	8.59
27	7.8	9.7	9.19
29	8.4	10.3	9.79
31	9.0	10.9	10.39
33	9.6	11.5	10.99
35	10.2	12.1	11.59
37	10.8	12.7	12.19
39	11.4	13.3	12.79
41	12.0	13.9	13.39
43	12.6	14.5	13.99
45	13.2	15.1	14.59
47	13.8	15.7	15.19
49	14.4	16.3	15.79



※この表は1, 3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		J	DCN26352	2026/07/01	R. NAKAJIMA	Y. TSURUOKA	H. TAMAI
$X < 10 \pm 0.2$ $10 \leq X < 30 \pm 0.25$ $30 \leq X \pm 0.3$		UNIT		H	DCN18868	2018/10/15	Y. MANBA	N. KITAGAWA	Y. FUJII
ANGLE / 角度 $\pm 3^\circ$		ANGLE		O	EDN-146	2012/02/23	N. NAKAJIMA		T. SATOH
SCALE		DATE		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
DRAWN		DESIGNED		PART NAME / 品名					
M. TAKAHASHI		N. NAKAJIMA		FPC ASSY RA SMT 0.3mm PITCH ZIF TYPE BOTTOM CONTACT					
CHECKED		APPROVED		PART NO. / 型番					
				04 6844 7XX 002 846 +					
DWG NO. / 図番		SHEET/REV		DWG NO. / 図番					
				BJS 6844006					
				1/4 J					



KYOCERA

51P以上

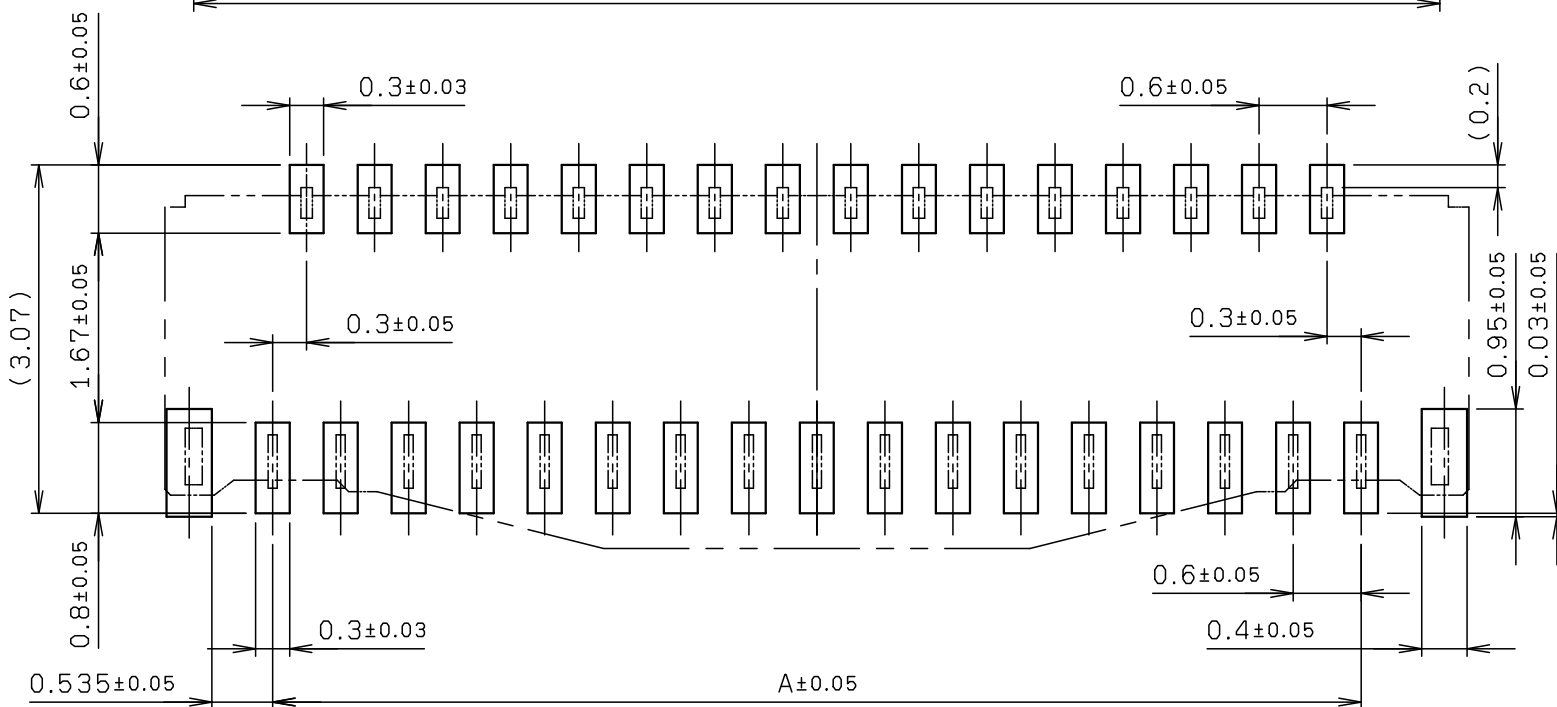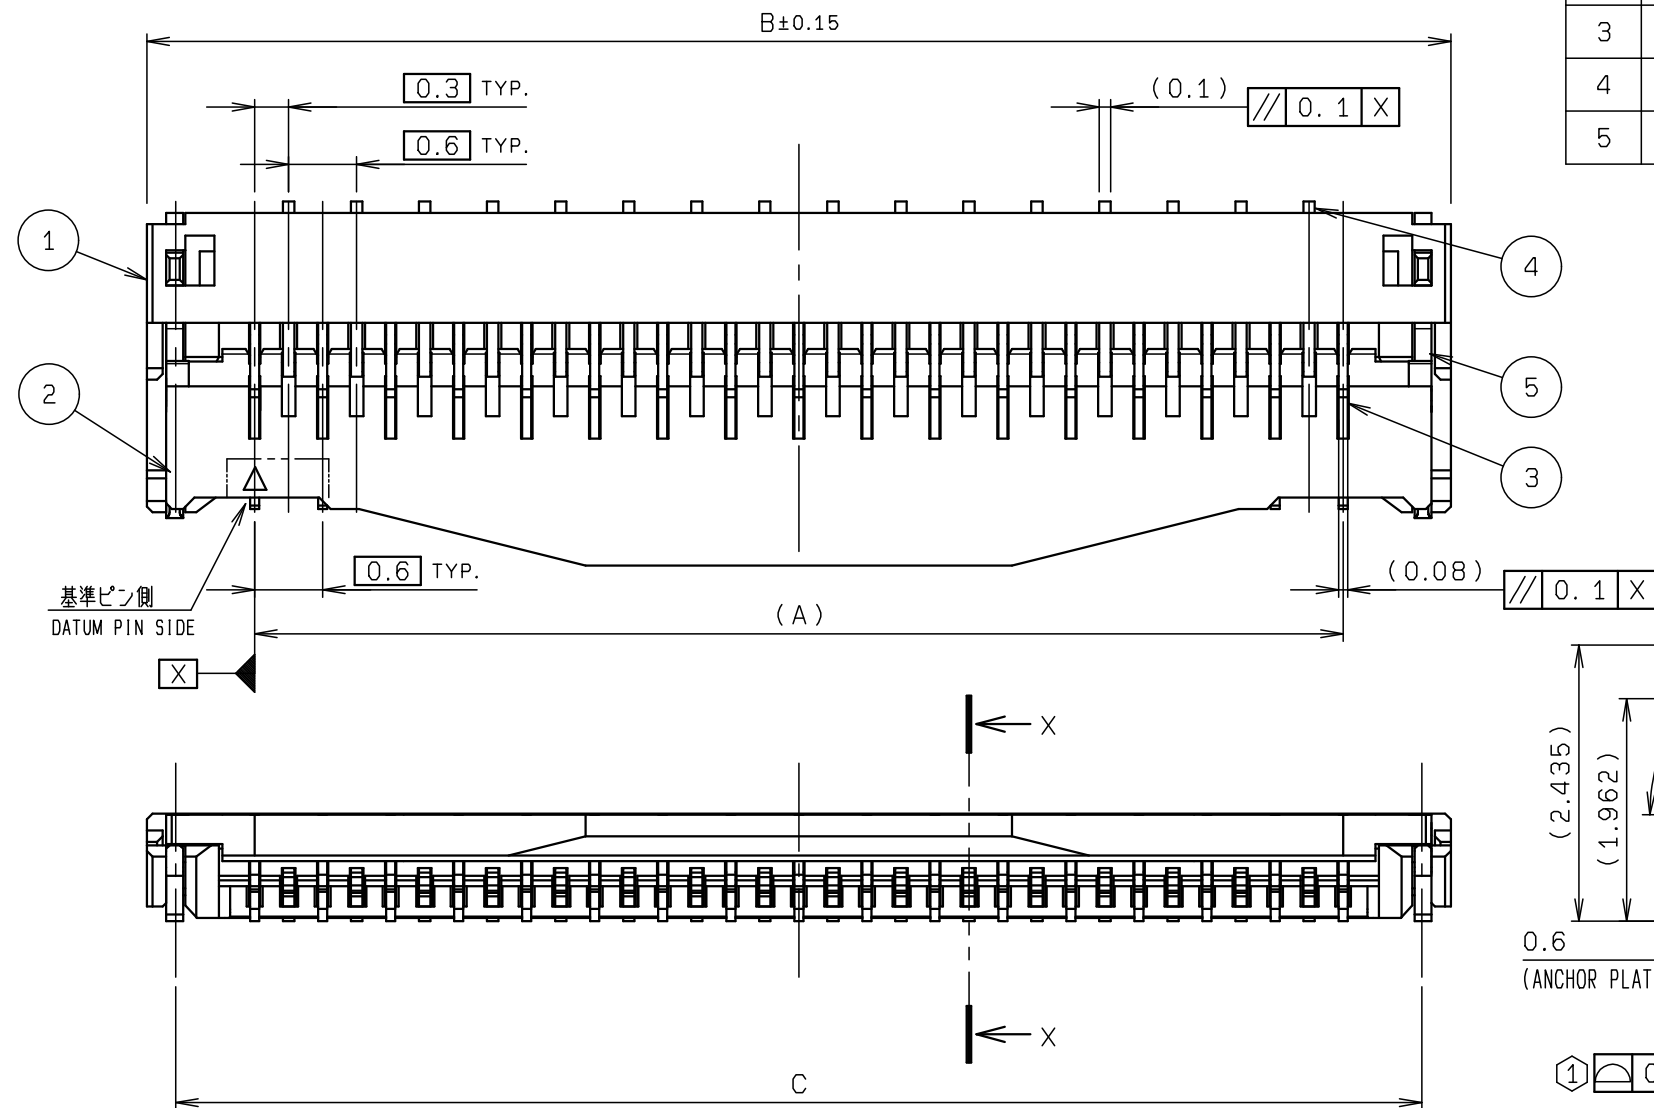

基板取付寸法
MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK
3	CONTACT (FRONT TYPE)		$\frac{N+1}{2}$	PHOS-BRONZE		
4	CONTACT (REAR TYPE)		$\frac{N-1}{2}$	PHOS-BRONZE		
5	ANCHOR PLATE		2	PHOS-BRONZE		

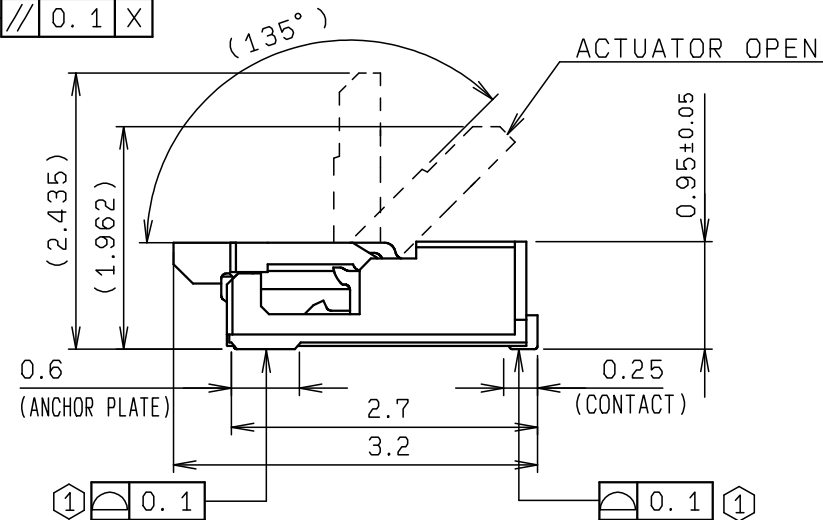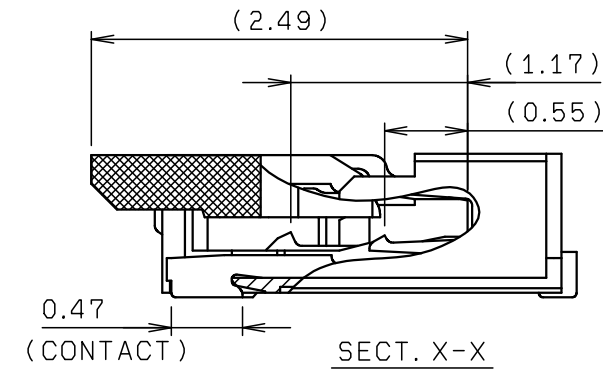



極数 NO. OF POS.	A	B	C
51	15.0	16.9	16.39
53	15.6	17.5	16.99
55	16.2	18.1	17.59
57	16.8	18.7	18.19
59	17.4	19.3	18.79
61	18.0	19.9	19.39

※この表は2, 3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 AND SHEET-3 ONLY.


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3		UNIT		ANGLE		REFER		TO SHEET 1/4	
		mm		3RD					
ANGLE / 角度 ±3°		SCALE NTS		DATE 2012/02/23		NO.		EDN/DCN	
						DATE		ISSUE	
						CHECKED		APPROVED	
DRAWN M. TAKAHASHI		DESIGNED N. NAKAJIMA		CHECKED		PART NAME / 品名 FPC ASSY RA SMT 0.3mm PITCH ZIF TYPE BOTTOM CONTACT			
				APPROVED T. SATOH		PART NO. / 型番 04 6844 7XX 002 846 +			
						DWG NO. / 図番 BJS 6844006		SHEET/REV 12/4 J	

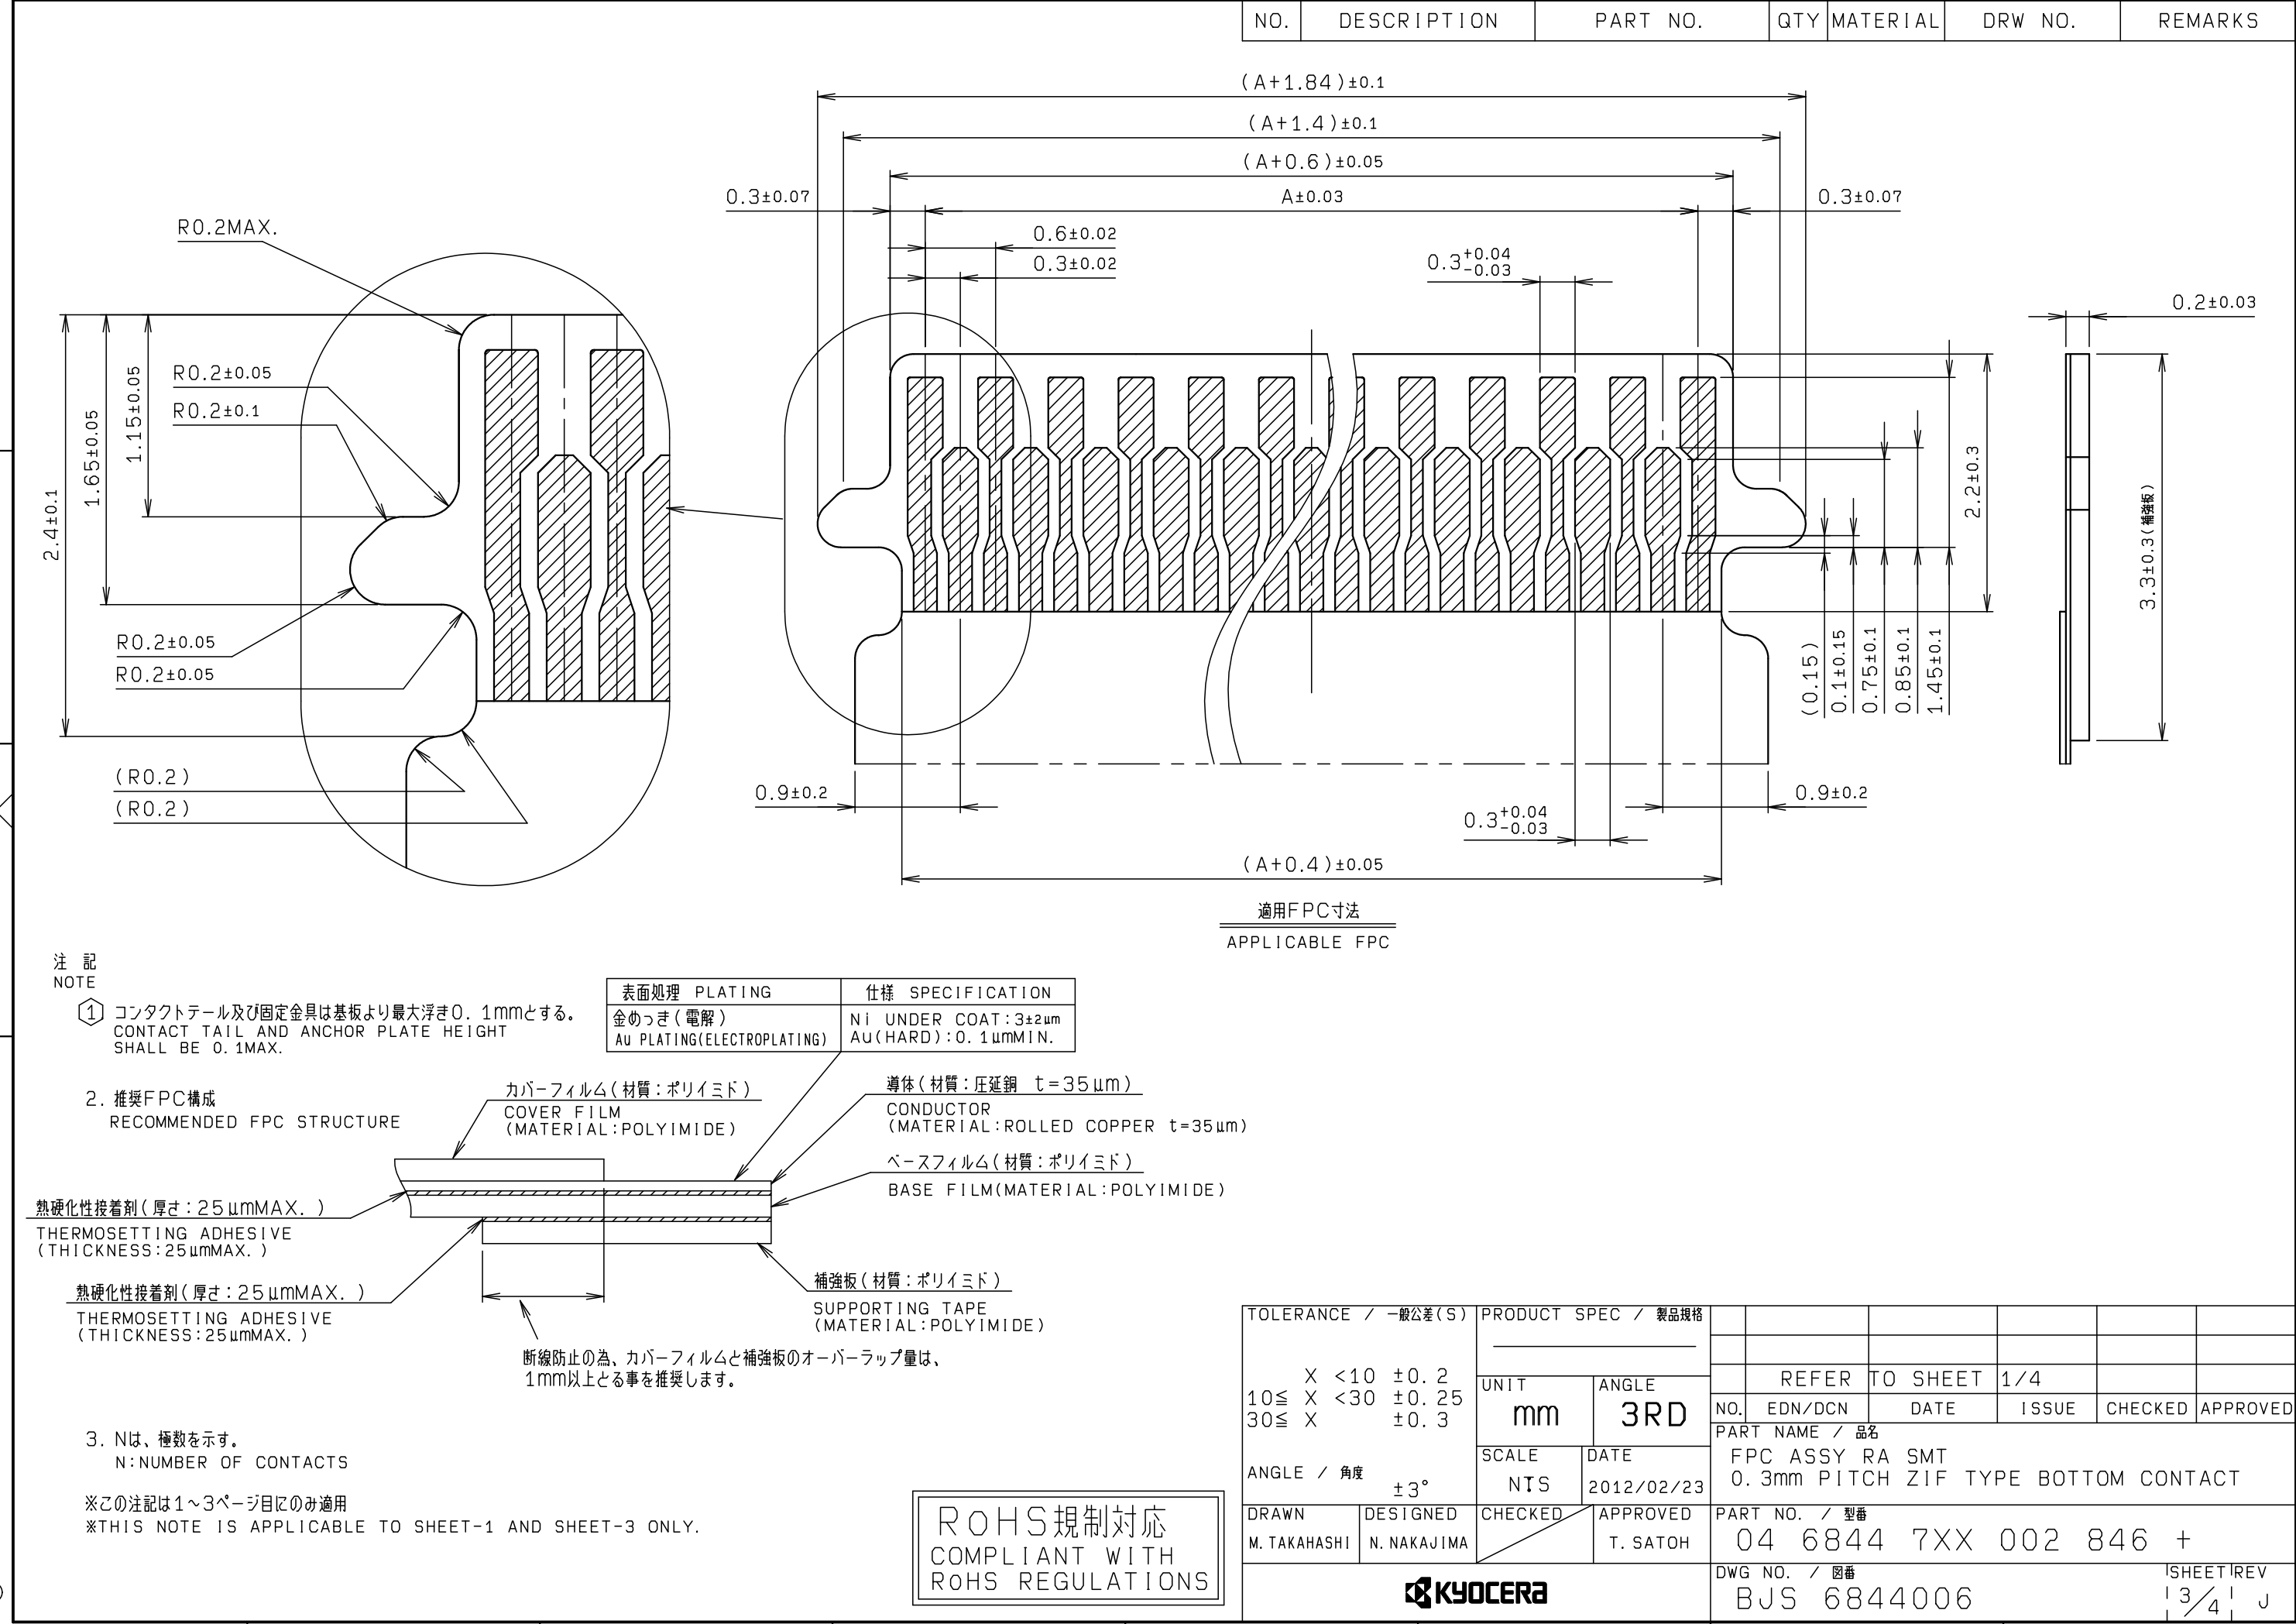


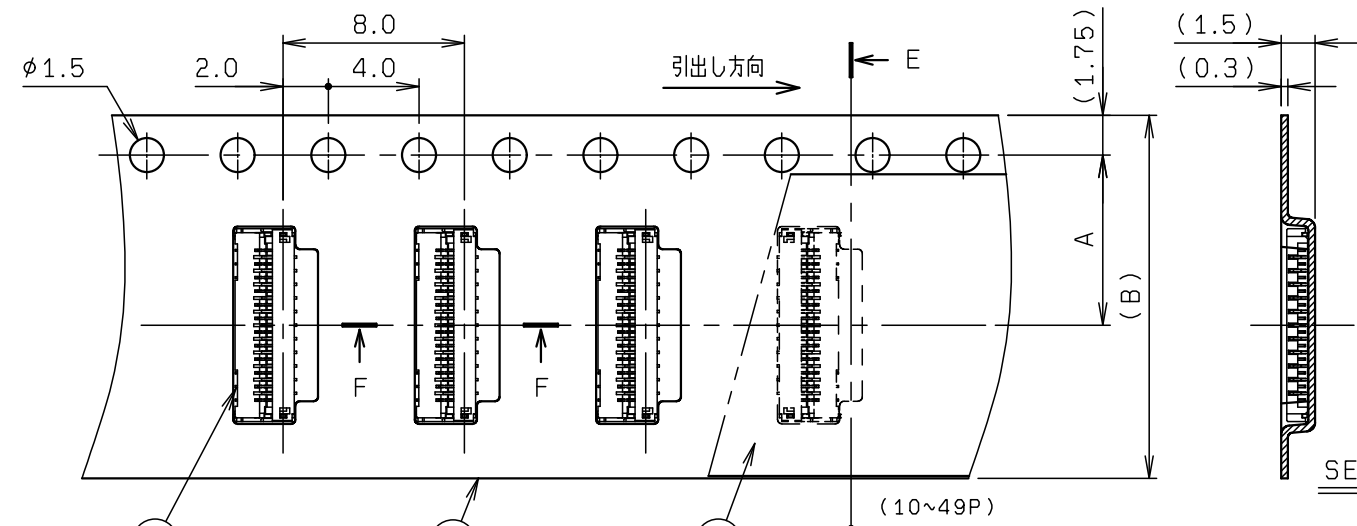


SECT. E-E
(10~49P)

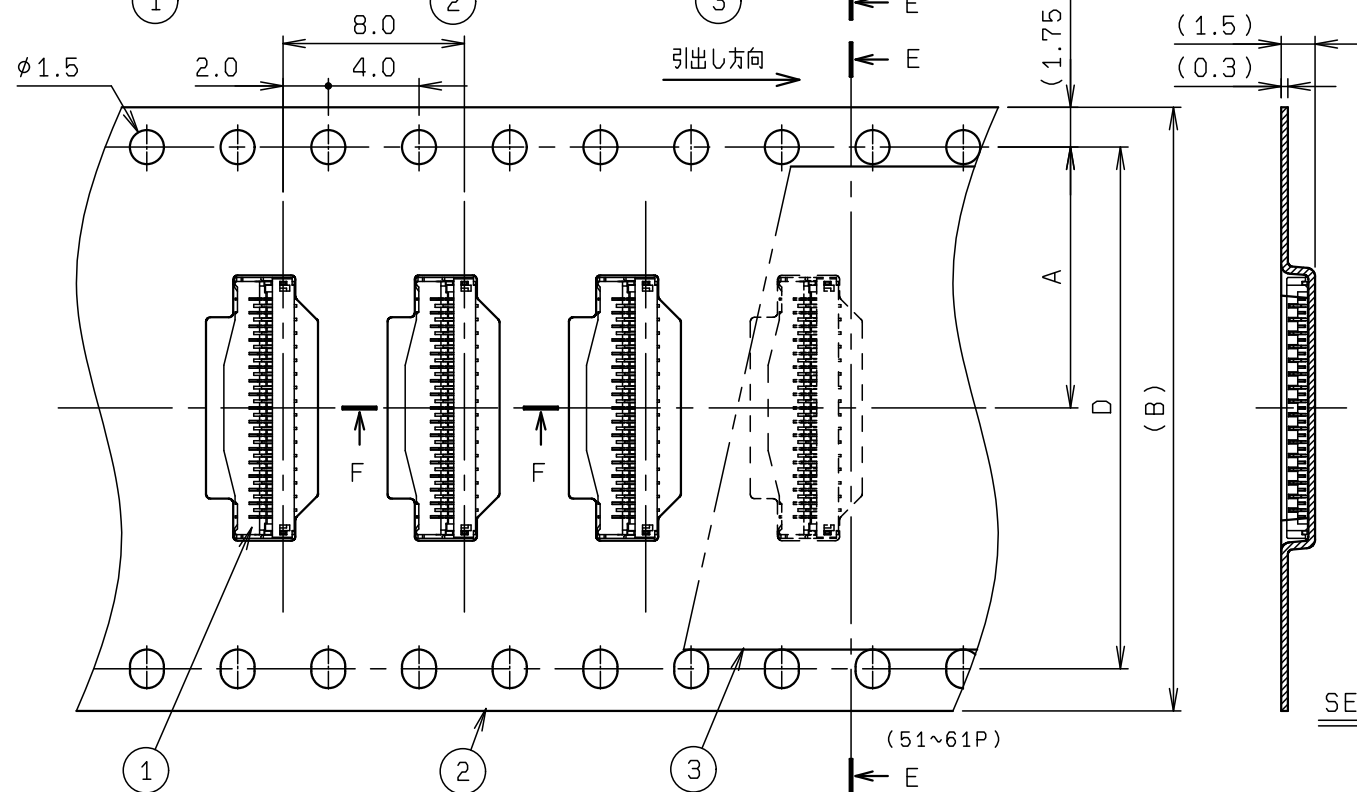


SECT. E-E
(51~61P)

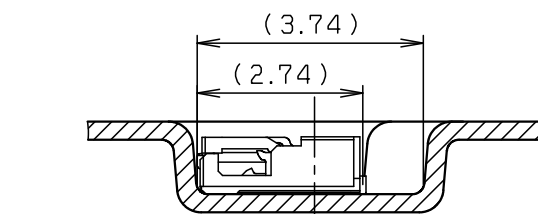


SECT. F-F (S=8:1)
(10~49P)

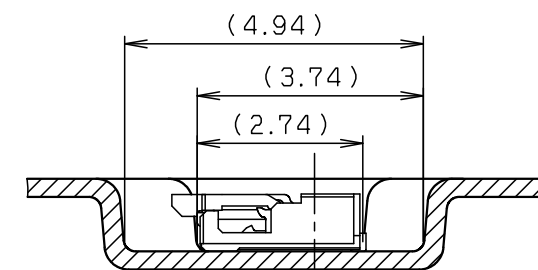

SECT. F-F (S=8:1)
(51~61P)

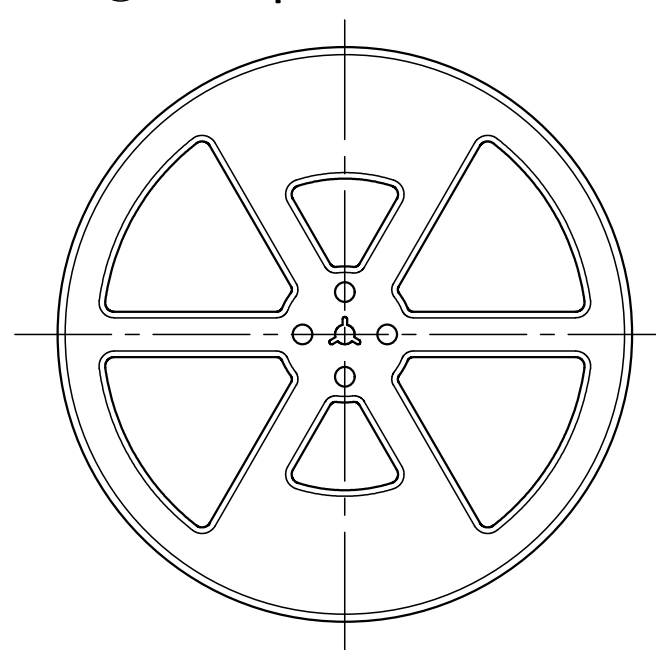

REEL DIMENSION (S=1:5)

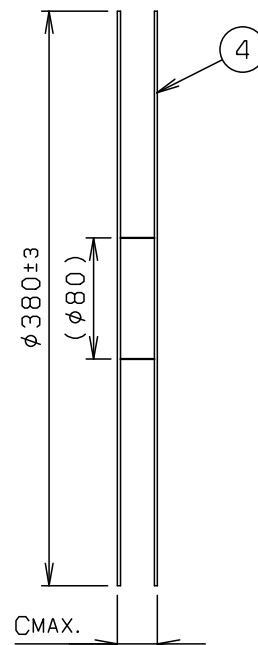


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6844 7XX 002 846 +	5000			00 6844 7XX 002 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

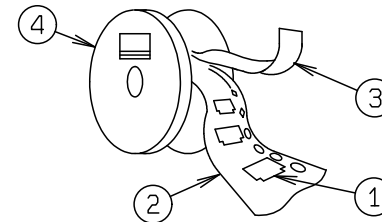

3. 引出し方向

USER DIRECTION OF FEED

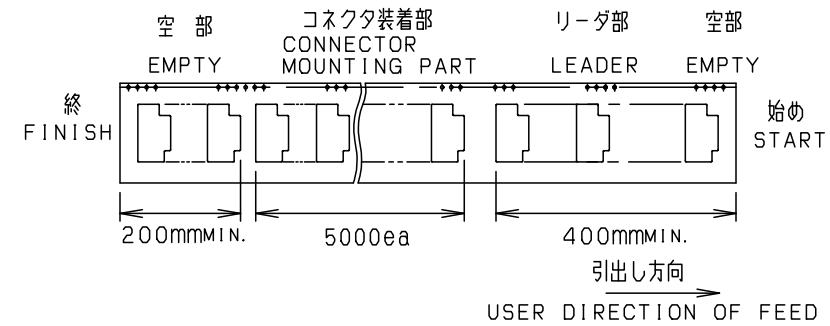

4. 型番
P/N

04 6844 7XX 002 846 +

バリエーション
VARIATION
7:ハロゲンフリー品 (UL94HB)

極数
NO. OF POS.
めっきコート*
PLATING CODE
846:AU(SELECTIVE)

※この注記の1~3は4ページ目にも適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-4 ONLY.

極数 NO. OF POS.	A	B	C	D
11	7.5	16.0	22.4	—
13	7.5	16.0	22.4	—
15	7.5	16.0	22.4	—
17	7.5	16.0	22.4	—
19	7.5	16.0	22.4	—
21	7.5	16.0	22.4	—
23	11.5	24.0	30.4	—
25	11.5	24.0	30.4	—
27	11.5	24.0	30.4	—
29	11.5	24.0	30.4	—
31	11.5	24.0	30.4	—
33	11.5	24.0	30.4	—
35	11.5	24.0	30.4	—
37	11.5	24.0	30.4	—
39	11.5	24.0	30.4	—
41	11.5	24.0	30.4	—
43	11.5	24.0	30.4	—
45	11.5	24.0	30.4	—
47	11.5	24.0	30.4	—
49	11.5	24.0	30.4	—
51	14.2	32.0	38.4	28.4
53	14.2	32.0	38.4	28.4
55	14.2	32.0	38.4	28.4
57	14.2	32.0	38.4	28.4
59	14.2	32.0	38.4	28.4
61	14.2	32.0	38.4	28.4

※この表は4ページ目にも適用

※THIS CHART IS APPLICABLE TO
SHEET-4 ONLY.

RoHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT mm		ANGLE 3RD	REFER TO SHEET		1/4			
	SCALE 3 : 1		DATE 2012/02/23	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	ANGLE / 角度 ±3°		PART NAME / 品名 EMBOSS TAPE ASSY FPC ASSY RA SMT						
DRAWN M. TAKAHASHI	DESIGNED N. NAKAJIMA	CHECKED	APPROVED T. SATOH	PART NO. / 型番 04 6844 7XX 002 846 +					
KYOCERA				DWG NO. / 図番 BJS 6844006				SHEET/REV 14/4 J	