




# GRANADA UNIVERSITY (UGR)



Theoretical and Cosmos Physics Department



Geophysics Andalusian Institute

Theoretical Physics and the Cosmos Department

ANDALUSIAN INSTITUTE OF GEOPHYSICS AND PREVENTION OF SEISMIC DISASTERS

Signal Theory, Telematics and Communications Department

## **“Shannon Entropy estimator for Characterization of Volcanic Seismic Signals with Python Software”**

*(Estimador de entropía de Shannon para la caracterización de señales sísmico-volcánicas con software Python)*

User manual: Version 1.2

**Autor:**

**Ligdamis A. Gutiérrez E. PhD.**

*Masaya Volcano, Nicaragua  
Photo by: Ligdamis A. Gutiérrez E.*

*Granada, Spain – 2023 -2025*

|                                                                                                                                                               |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>General index .....</b>                                                                                                                                    | <b>2</b>  |
| 1.- <a href="#">Introduction</a> .....                                                                                                                        | 5         |
| 2.- <a href="#">System initial screen</a> .....                                                                                                               | 6         |
| 2.1.- <a href="#">Initial screen elements</a> .....                                                                                                           | 8         |
| <b>MODULE I (<a href="#">Reading and plot Records</a>) .....</b>                                                                                              | <b>9</b>  |
| 3.- <a href="#">Reading and graphing records module</a> .....                                                                                                 | 10        |
| 3.1.- <a href="#">Elements of the register reading and graphics module</a> .....                                                                              | 10        |
| 3.1.1.- <a href="#">Title Area</a> .....                                                                                                                      | 11        |
| 3.1.2.- <a href="#">Filter area</a> .....                                                                                                                     | 11        |
| a) <a href="#">Filter type selection</a> .....                                                                                                                | 11        |
| b) <a href="#">Filter parameters selection</a> .....                                                                                                          | 12        |
| c) <a href="#">Filter order selection</a> .....                                                                                                               | 12        |
| 3.1.3.- <a href="#">Graph and Clear inputs command buttons</a> .....                                                                                          | 12        |
| a) <a href="#">Plot record command button</a> .....                                                                                                           | 13        |
| b) <a href="#">Clean Input command button</a> .....                                                                                                           | 13        |
| 3.1.4.- <a href="#">One or three components selection</a> .....                                                                                               | 13        |
| 3.1.5.- <a href="#">Metadata and trace information block record</a> .....                                                                                     | 14        |
| 3.1.6.- <a href="#">Records statistics information area</a> .....                                                                                             | 14        |
| 3.1.7.- <a href="#">Load command block, path where the records and the corresponding traces are stored (one or three components)</a> .....                    | 14        |
| a) <a href="#">Load command block</a> .....                                                                                                                   | 15        |
| b) <a href="#">Path area where records are stored</a> .....                                                                                                   | 16        |
| c) <a href="#">Area of the corresponding traces (one or three components)</a> .....                                                                           | 17        |
| 3.1.8.- <a href="#">Go Back and Exit command buttons</a> .....                                                                                                | 17        |
| a) <a href="#">Go Back button</a> .....                                                                                                                       | 17        |
| b) <a href="#">Exit button</a> .....                                                                                                                          | 17        |
| 3.2.- <a href="#">Errors validation in data inputs registration</a> .....                                                                                     | 18        |
| a) <a href="#">Data entry validations – Empty frequency</a> .....                                                                                             | 18        |
| b) <a href="#">Data entry validations – Minimum and maximum empty frequencies</a> .....                                                                       | 18        |
| c) <a href="#">Data entry validations – Empty filter order</a> .....                                                                                          | 18        |
| d) <a href="#">Data entry validations – Empty path directories and files</a> .....                                                                            | 18        |
| e) <a href="#">Data entry validations – Empty trace number</a> .....                                                                                          | 19        |
| f) <a href="#">Data validation in case another invalid entry or file error occurs</a> .....                                                                   | 19        |
| 3.3.- <a href="#">Execution process and results of the reading and graphics module</a> .....                                                                  | 19        |
| 3.3.1.- <a href="#">Reading procedure example (one component)</a> .....                                                                                       | 20        |
| a) <a href="#">Interface and graphical output (one component)</a> .....                                                                                       | 20        |
| 3.3.2.- <a href="#">Reading procedure example (three components, one and several traces)</a> .....                                                            | 21        |
| a) <a href="#">Interface and graphical output (three components, with equal trace)</a> .....                                                                  | 21        |
| b) <a href="#">Interface and graphical output (three components, with diferents traces)</a> .....                                                             | 22        |
| <b>MODULE II (<a href="#">Entropy application method for Seismic-Volcanic signals</a>) .....</b>                                                              | <b>25</b> |
| 4.- <a href="#">Module for Estimation of Shannon Entropy, Kurtosis, Frequency Index, and Energy for the Characterization of Seismo-Volcanic Signals</a> ..... | 26        |
| 4.1.- <a href="#">Elements of the reading, calculating and graphics Shannon Entropy module</a> .....                                                          | 27        |
| 4.1.1.- <a href="#">Title Area</a> .....                                                                                                                      | 27        |
| 4.1.2.- <a href="#">Command Buttons Area: (Load record, create CSV and NPY files and Plot Entropy)</a> .....                                                  | 27        |
| a) <a href="#">Load Records button</a> .....                                                                                                                  | 27        |
| b) <a href="#">CSV and NPY File buttons</a> .....                                                                                                             | 28        |
| c) <a href="#">Plot Entropy button</a> .....                                                                                                                  | 28        |

|                                                                                                                            |    |
|----------------------------------------------------------------------------------------------------------------------------|----|
| 4.1.3.- Selection area and filter parameters .....                                                                         | 29 |
| a) <a href="#">Filter type selection area</a> .....                                                                        | 29 |
| b) <a href="#">Selection area of the filter parameters introduction</a> .....                                              | 29 |
| 1) <a href="#">Frequency parameter (Hz)</a> .....                                                                          | 29 |
| 2) <a href="#">Filter order parameter</a> .....                                                                            | 30 |
| 3) <a href="#">Minimum and Maximum Frequency Parameters (Hz.)</a> .....                                                    | 30 |
| 4.1.4.- Interval selection area (analysis and envelope Windows) .....                                                      | 30 |
| a) <a href="#">Envelope Parameter Selection</a> .....                                                                      | 30 |
| b) <a href="#">Filter Parameter Selection and Entry Area</a> .....                                                         | 31 |
| c) <a href="#">Time interval selection</a> .....                                                                           | 31 |
| d) <a href="#">Selecting the initial time interval to plot on the x-axis</a> .....                                         | 31 |
| 4.1.5.- Loading area (Path), where the records are located and where the CSV and NPY<br>results files will be stored ..... | 33 |
| 4.1.6.- Command Buttons Area: (Clean, Go Back and Exit) .....                                                              | 33 |
| a) <a href="#">Clear entries button</a> .....                                                                              | 34 |
| b) <a href="#">Go Back button</a> .....                                                                                    | 34 |
| c) <a href="#">Exit button</a> .....                                                                                       | 34 |
| 4.2.- Input data errors validations .....                                                                                  | 35 |
| a) <a href="#">Data entry validations – Record directory path empty</a> .....                                              | 35 |
| b) <a href="#">Validation for data entry – “CSV” and “NPY” files directory area empty</a> ...                              | 35 |
| c) <a href="#">Validation for data entry – Envelope Parameters</a> .....                                                   | 35 |
| d) <a href="#">Validation for data entry – Start and End time interval empty</a> .....                                     | 36 |
| e) <a href="#">Validation for data entry – Initial time interval for x-axis</a> .....                                      | 36 |
| f) <a href="#">Validation for data entry – Frequency value empty</a> .....                                                 | 36 |
| g) <a href="#">Validation for data entry – Minimum Frequency value empty</a> .....                                         | 36 |
| h) <a href="#">Validation for data entry – Maximum Frequency value empty</a> .....                                         | 36 |
| i) <a href="#">Validation for data entry – Empty Filter Order Value</a> .....                                              | 36 |
| j) <a href="#">Data validation in case another invalid entry or file error occurs</a> .....                                | 37 |
| 4.3.- Execution process and results of the Shannon Entropy reading, calculation and<br>graph module .....                  | 37 |
| 4.3.1.- Shannon Entropy calculation procedure example, with an analysis<br>window of 1 hour .....                          | 38 |
| 4.3.2.- “CSV” and NPY” results files stored in the folder assigned by the user ..                                          | 42 |
| a) <a href="#">“CSV” file</a> .....                                                                                        | 42 |
| b) <a href="#">“NPY” file</a> .....                                                                                        | 43 |
| 4.3.3.- Very high or negative points values in the Shannon Entropy calculation<br>graphs.....                              | 43 |
| MODULE III (Shannon Entropy envelopes comparison, using several filter frequencies) .....                                  | 49 |
| 5.- Shannon Entropy envelope comparison module, using several filter frequencies .....                                     | 50 |
| 5.1.- Elements of the envelope comparison module .....                                                                     | 50 |
| 5.1.1.- Title area .....                                                                                                   | 51 |
| 5.1.2.- Command Buttons Area: (Record, Clear entries and Plot Entropy).....                                                | 51 |
| a) <a href="#">“Records” button</a> .....                                                                                  | 51 |
| b) <a href="#">“Clear entries” button</a> .....                                                                            | 52 |
| c) <a href="#">“Plot Entropy” button</a> .....                                                                             | 52 |
| 5.1.3.- Parameter input block. Envelope window values.....                                                                 | 53 |
| a) <a href="#">Envelope Parameter Selection</a> .....                                                                      | 53 |
| b) <a href="#">Time interval selection</a> .....                                                                           | 53 |
| 5.1.4.- Filter type selection area, parameter entry and filter order .....                                                 | 54 |
| a) <a href="#">Filter type selection area to use</a> .....                                                                 | 54 |
| b) <a href="#">Filter parameters introduction selection area</a> .....                                                     | 55 |
| c) <a href="#">Filter order parameter</a> .....                                                                            | 55 |
| 5.1.5.- Loading area or path, of the directory and the records to use .....                                                | 56 |
| 5.1.6.- Command Buttons Area: (Back and Exit).....                                                                         | 56 |

|                                                                                                                                                   |    |
|---------------------------------------------------------------------------------------------------------------------------------------------------|----|
| a) <a href="#">“Back” button</a>                                                                                                                  | 56 |
| b) <a href="#">“Exit” button</a>                                                                                                                  | 56 |
| 5.2.- <a href="#">Input data errors validations</a>                                                                                               | 57 |
| a) <a href="#">Data entry validations – Record directory path empty</a>                                                                           | 57 |
| b) <a href="#">Data entry validations – Envelope Parameters</a>                                                                                   | 57 |
| c) <a href="#">Data entry validations – Initial type interval empty</a>                                                                           | 57 |
| d) <a href="#">Data entry validations – Final time interval empty</a>                                                                             | 58 |
| e) <a href="#">Data entry validations – Filter Order Value empty</a>                                                                              | 58 |
| f) <a href="#">Data entry validations – Frequency Value, Filter 1 empty</a>                                                                       | 58 |
| g) <a href="#">Data entry validations – Frequency Value, Filter 2 empty</a>                                                                       | 58 |
| h) <a href="#">Data entry validations – Frequency Value, Filter 3 empty</a>                                                                       | 58 |
| i) <a href="#">Data entry validations – Frequency Value, Filter 4 empty</a>                                                                       | 58 |
| j) <a href="#">Data entry validations – Frequency Value, Filter 5 empty</a>                                                                       | 58 |
| k) <a href="#">Data entry validations – Minimum Frequency Value, Filter 1 empty</a>                                                               | 59 |
| l) <a href="#">Data entry validations – Maximum Frequency Value, Filter 1 empty</a>                                                               | 59 |
| m) <a href="#">Data entry validations – Minimum Frequency Value, Filter 2 empty</a>                                                               | 59 |
| n) <a href="#">Data entry validations – Maximum Frequency Value, Filter 2 empty</a>                                                               | 59 |
| o) <a href="#">Data entry validations – Minimum Frequency Value, Filter 3 empty</a>                                                               | 59 |
| p) <a href="#">Data entry validations – Maximum Frequency Value, Filter 3 empty</a>                                                               | 59 |
| q) <a href="#">Data entry validations – Minimum Frequency Value, Filter 4 empty</a>                                                               | 60 |
| r) <a href="#">Data entry validations – Maximum Frequency Value, Filter 4 empty</a>                                                               | 60 |
| s) <a href="#">Data entry validations – Minimum Frequency Value, Filter 5 empty</a>                                                               | 60 |
| t) <a href="#">Data entry validations – Maximum Frequency Value, Filter 5 empty</a>                                                               | 60 |
| u) <a href="#">Data validation in case another invalid entry or file error occurs</a>                                                             | 60 |
| 5.3.- <a href="#">Execution process and results of the Envelope Comparison module</a>                                                             | 60 |
| 5.3.1.- <a href="#">Envelope comparison procedure example, using several filter frequencies</a>                                                   | 61 |
| 5.3.2.- <a href="#">Envelope comparison procedure example, using several filter frequencies, with a time interval</a>                             | 63 |
| 5.3.3.- <a href="#">Envelope comparison procedure example, using several filter frequencies, with two different volcanoes types and eruptions</a> | 65 |
| 6.- <a href="#">Graph Toolbar (Matplotlib Library)</a>                                                                                            | 67 |
| 6.1.- <a href="#">Graphs save</a>                                                                                                                 | 67 |
| 6.2.- <a href="#">Axes and images editing of the graphs</a>                                                                                       | 69 |
| Appendix A                                                                                                                                        | 73 |
| A1.- <a href="#">Python installation and additional libraries</a>                                                                                 | 73 |
| A1.1. <a href="#">Content package installation</a>                                                                                                | 73 |
| A1.2.- <a href="#">Python installing in Windows system</a>                                                                                        | 73 |
| A1.3.- <a href="#">Additional libraries installing</a>                                                                                            | 74 |
| A1.4 <a href="#">Automatic installation of libraries in Windows and Linux from the PIP</a>                                                        | 77 |
| Appendix B                                                                                                                                        | 78 |
| <a href="#">Python libraries install, for the accurate system functioning</a>                                                                     | 78 |
| Appendix C                                                                                                                                        | 79 |
| <a href="#">Methodology: Definitions of the Metrics or Analytical Tools to be Used</a>                                                            | 79 |
| a) <a href="#">Shannon Entropy</a>                                                                                                                | 79 |
| b) <a href="#">Kurtosis</a>                                                                                                                       | 79 |
| c) <a href="#">Frequency Index</a>                                                                                                                | 80 |
| d) <a href="#">Energy</a>                                                                                                                         | 81 |



The "*Shannon Entropy Estimator for the Characterization of Seismic-Volcanic Signals using Python Software*" is a user-friendly interface that enables easy and efficient management for working with the most commonly used seismic signal formats in observatories, such as: SEISAN, GSE2, EVT, GCF, WAV, MSED, and SAC, among others.

The system is composed of three independent modules:

1. Performs signal reading and filtering actions, using one or three components, and provides graphical representations of both the original and filtered signals.
2. Calculates and graphically represents metrics such as: Shannon Entropy (original and normalized), the envelope of the Shannon Entropy and its smoothed version using a cosine function with a Hann window, Kurtosis, Frequency Index, and Energy, along with their respective envelopes.
3. Presents a comparison of the Entropy envelope through the calculation of five types of frequency intervals within a filter previously selected by the user.

This entire procedure constitutes a great practical help for some observatories that need to have tools, programs, and specific software to carry out the reading of various formats, perform calculations, and present results. However, they encounter problems due to complicated tools (learning, handling, management, and change). In addition, data acquisition is carried out through external sites that the operators do not manage or control, or the data is provided by other observatories whose operating formats differ from those that will be processed and analyzed in the receiving observatory.

For these main reasons, it is important and extremely useful for the human operator to have a user-friendly system that performs the calculation process of large volumes of data using mathematical parameters such as Shannon Entropy, Kurtosis, Frequency Index, and Energy (complemented by their respective envelopes), obtaining results in a more reliable and simple way. In this way, much more information can be provided about the volcanic processes (pre-eruptive and post-eruptive), contributing to better early warning systems.

The system to carry out all the mentioned aspects consists of three independent modules:

1. **Signal Reading and Filtering Module:** (Read, filter, and represent seismic signals), either using one or three components.
2. **Calculation and Presentation Module of Shannon Entropy:** This includes the calculation and presentation of Shannon Entropy (original and normalized), Frequency Index, Kurtosis and Energy, along with their respective envelopes, based on analysis windows (5, 10 minutes, one hour, and twenty-four hours).
3. **Module for Reading, Filtering, and Graphs of Shannon Entropy Envelope:** This module is responsible for reading, filtering, and graphically displaying the envelope of Shannon entropy through the filtering of various frequency intervals.

**IMPORTANT NOTE:** For proper reading and processing in the modules of the records, the folders containing them must be indicated or numbered in Julian days (001-365). Regardless of the body of the name that precedes it. Valid examples include: (UC.INCA..HHZ.D.2020.**001** - NU.TELN.00.EHZ.D.2020.**280** - C7.PLPI..HHZ.D.2022.**004**).

The system has been developed in the Python programming language, version 3.8.6. (The library set is compatible with version 3.10.10). Additionally, a series of open-access libraries are included which, in conjunction with Python, work to enable the use of graphical and analytical tools, providing simplicity in use and increasing computational power for the user. Listing some of the main elements and libraries used here, they include:

- **NumPy:** A library for numerical operations in Python. . (<https://numpy.org/doc/stable/user/quickstart.html>)
- **Matplotlib:** Used for creating static, animated, and interactive visualizations in Python. (<https://matplotlib.org/stable/users/index.html>)
- **PyQt5:** A tool that links with the graphical library Qt5 in C++. (<https://pypi.org/project/PyQt5/>)
- **ObsPy:** A Python toolbox for seismology. (<https://docs.obspy.org/>)
- **Tkinter:** Graphical user interface (GUI) (<https://docs.python.org/3/library/tkinter.html>)

These libraries, among others, contribute to the functionality of the system, making it user-friendly and enhancing its computational capabilities. Another key feature of the system is its definition as a cross-platform application, meaning that it can operate under various platforms or operating systems, such as Windows (7, 8, 10, 11) in both 32-bit and 64-bit versions. Additionally, it is designed to work on Linux systems like Ubuntu and similar distributions (*Debian, Red Hat, Fedora, SUSE, etc.*), Mac, or Android for tablets and mobile devices (*with prior adaptation of Python for these devices*).

**NOTE:** In the appendices of this document (as well as in the *Readme.txt* and *Initials\_requirements.txt* files), you can find information on general aspects of installation on Windows and Linux systems. It provides guidelines for installing the main programs and additional libraries that Python requires to correctly execute the programs developed in its environment.

## 2.- System Initial Screen

[Back to Index](#)

To install the system on Windows<sup>1</sup>, you basically need to perform two actions:

- Copy the "*EntropySis1*" folder in "My Documents" in Windows.
- Copy the "*EntropySis1.bat*" file to the Windows "Desktop".

Beforehand, install Python and the additional Python libraries, the instructions for which are found in the "Initials\_requirements.txt" file or at the end of this document (see *Appendices A and B, Pages 73-78*). Once you have copied "EntropySis1.bat" to the desktop, right-click and select "Run as administrator."



Fig. 1 Pop-up window when right-clicking the file "EntropySis1.bat"

On the screen that opens, click the "Yes" button when asked, "*Do you want to allow this app to make changes to your device?*" This is a warning message. However, the application doesn't make any changes, so you should trust its execution.

Upon clicking "Yes," the following command window opens, indicating the welcome to the system.

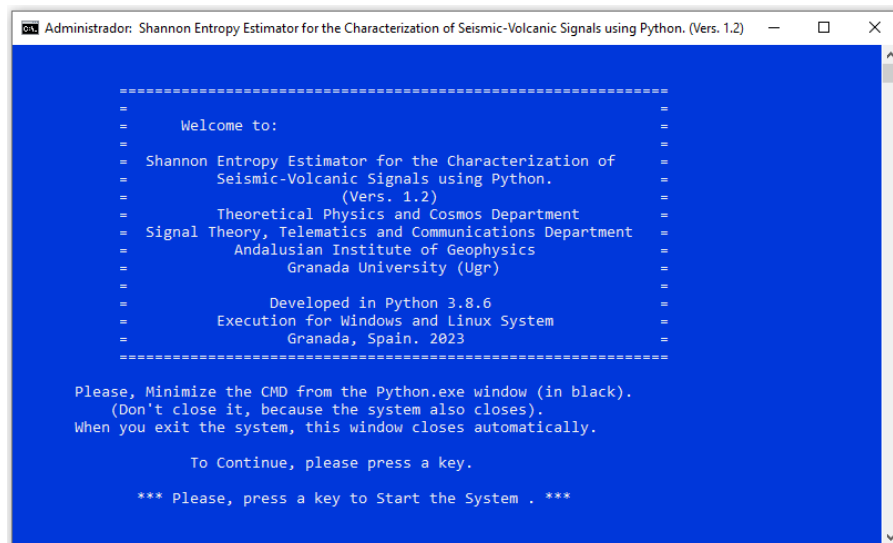


Fig. 2 Welcome Screen to the Entropy Analysis System for Seismic-Volcanic Signals.

After reading the instructions in the window, you just need to press any key to access the initial screen of the system. The system should already be copied to "*My Documents*" and the additional libraries installed. With this, the "EntropySis1.bat" file contains all the program loading instructions.

<sup>1</sup> To install the system on Linux or Mac operating systems, please refer to the "*README.txt*" file and the appendices in this document.

The initial screen of the system is "*Menu1.py*". It is displayed when any key is pressed on the Welcome screen. Additionally, the Python console window (*a screen with a black background*) appears, similar to the following:

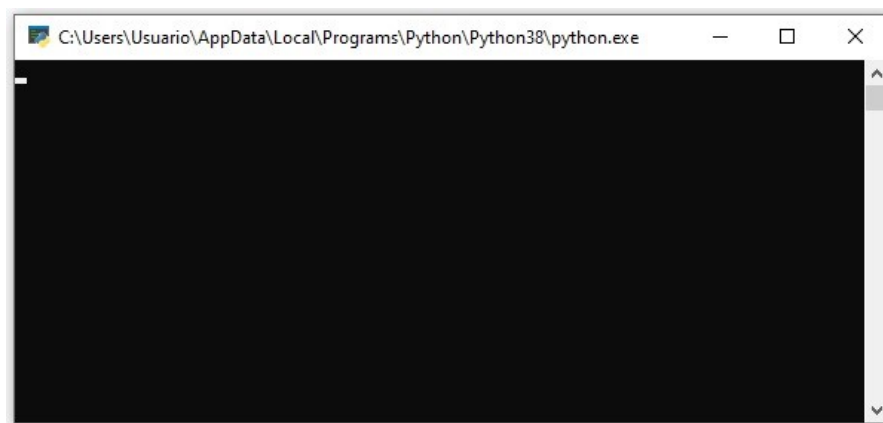


Fig. 3 Python Console (CMD) Window (*Should be minimized*)

To prevent it from obstructing the view, you can and should "*minimize*" the console window. **Do not close it**, as doing so would also close the system's startup window. Upon exiting, after completing tasks with the system, this window closes automatically. The initial screen "*Menu1.py*" (*which provides access to the system's modules*) looks like the following:


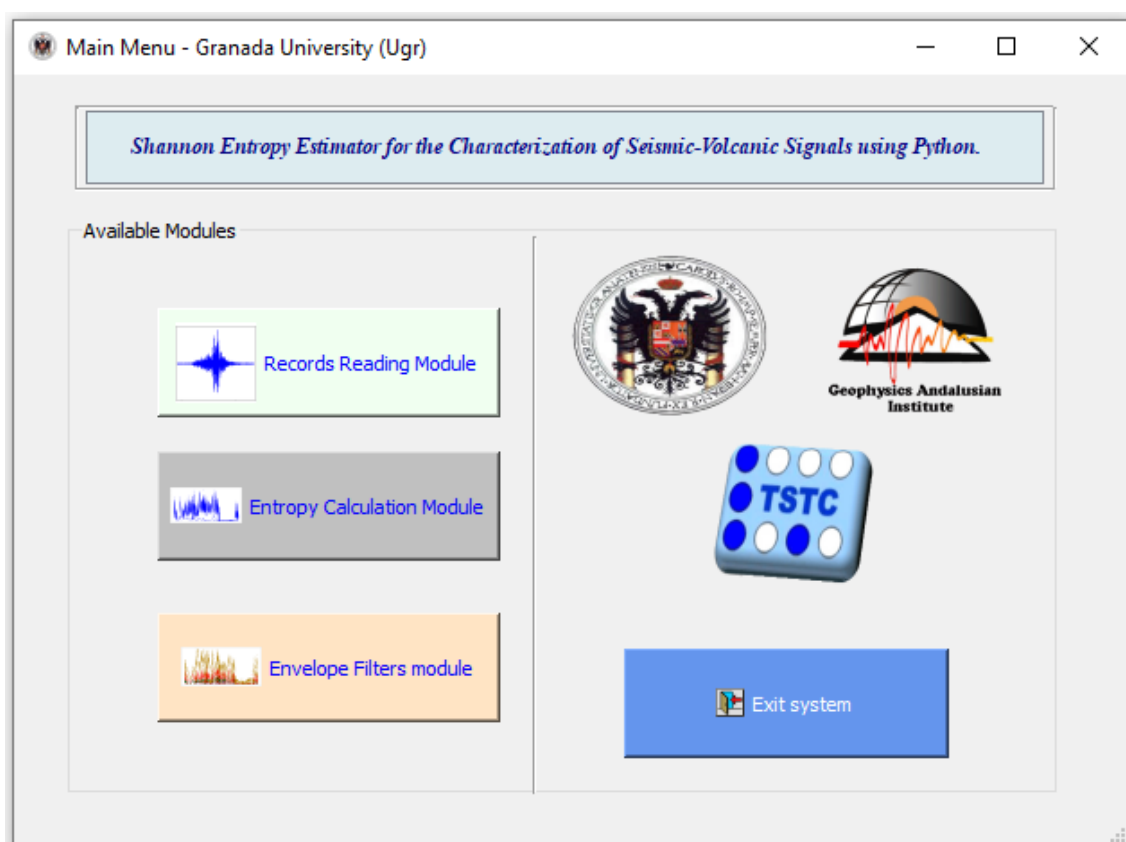


Fig. 4 Initial screen "Menu1.py", introduction and main menu of the system.


## 2.1.- Elements of the Initial Screen ("Menu1.py")

As observed in the above figure, the initial or presentation screen is a simple window composed of: Three command buttons for accessing modules, and in the bottom left corner, the system exit button.

- a) The name and icon of the University is visible at the top.



- b) At the bottom you can see the command button: "*Exit system*".



When the mouse pointer hovers over the button, a text appears indicating the action of that button (*Exit System*).



If you click the "*Exit system*" button, a window appears asking the user if they are sure they want to exit the system.




Fig. 5 Dialog Box asking if you want to exit the system.

If you click "*OK*" the screen closes, and the system exit is completed. If you click "*Cancel*," the initial menu continues. The menu contains three command buttons, each accessing a specific module of the system. The buttons are visible in the image below. Clicking each button provides access to the corresponding module. This is further explained in the following sections.



Fig. 6 Command Buttons for Accessing System Modules: **a)** Read and Plot Records, **b)** Calculation and Plotting of Entropy and Envelope, **c)** Reading and Plotting of Envelope by Filters.

# MODULE I

## READ AND PLOT RECORDS

Performs the read, filtering and plot the seismic signals - Granada University (Ugr)



Filter Type  
Please select

Select the Filter parameters  
Frequency (Hz):  
Frec Min (Hz):  
Frec Max (Hz):

Filter order  
4  
By default = 4

Plot record  
Clean Inputs

Select the file component number. By default = One  
☒ One component  
☐ Three component



**Seismic Record Graph:** The "obspy" library is used to read the seismic records, according to the different formats and the "Matplotlib" library to graph the seismic signals.

Metadata file informations

Trace file informations

The Registry Statistics are:

Load Record 1  
Load Record 2  
Load Record 3

Directory 1 and path file 1:  
Directory 2 and path file 2:  
Directory 3 and path file 3:

Trace Humb  
0  
By default = 0  
Trace Humb  
0  
By default = 0  
Trace Humb  
0  
By default = 0  
Go back  
Exit

Please be careful when loading the three components, indicate the same day.

Performs the read, filtering and plot the seismic signals - Granada University (Ugr)



Filter Type  
Bandpass Filter

Select the Filter parameters  
Frequency (Hz):  
Frec Min (Hz): 1  
Frec Max (Hz): 15

Filter order  
4  
By default = 4

Plot record  
Clean Inputs

Select the file component number. By default = One  
☐ One component  
☒ Three component



**Seismic Record Graph:** The "obspy" library is used to read the seismic records, according to the different formats and the "Matplotlib" library to graph the seismic signals.

Metadata file informations

Trace file informations

File 1: network: C7  
station: PLPI  
location:  
channel: HHE  
starttime: 2021-01-19T00:00:00.190000Z  
endtime: 2021-01-20T00:00:00.660000Z  
sampling\_rate: 100.0  
delta: 0.01  
npts: 8640048  
calib: 1.0  
format: M8EED  
mseed: AtrIOct((dataquality: 'D', 'number\_of\_records': 39653, 'encoding': 'STEIM4', 'byteorder': 's', 'record\_length': 512, 'resize': 20302336))  
File 2: network: C7

File 1: 1 Trace(s) in Stream:  
C7.PLPI.HHE | 2021-01-19T00:00:00.190000Z - 2021-01-20T00:00:00.660000Z | 100.0 Hz, 8640048 samples  
File 2: 1 Trace(s) in Stream:  
C7.PLPI.HHE | 2021-01-19T00:00:00.190000Z - 2021-01-20T00:00:00.660000Z | 100.0 Hz, 8640074 samples  
File 3: 1 Trace(s) in Stream:  
C7.PLPI.HHZ | 2021-01-19T00:00:00.190000Z - 2021-01-20T00:00:00.130000Z | 100.0 Hz, 8640076 samples

**Seismic Record Statistics**

1. The arithmetic mean is: -4176.838519994333 | The median is: -3953.0 | The Std. D. is: 4155.81203814469 | The variance is: 17270773.69655456 | The fs (Hz) is: 100.0 | The Samples No.: 8640048 | The Format is: M8EED  
2. The arithmetic mean is: -1407.9217373601198 | The median is: -1505.0 | The Std. D. is: 4399.129788602209 | The variance is: 19352342.89696732 | The fs (Hz) is: 100.0 | The Samples No.: 8640074 | The Format is: M8EED  
3. The arithmetic mean is: -4889.744178639169 | The median is: -5557.0 | The Std. D. is: 12384.977467451672 | The variance is: 15387666.86928564 | The fs (Hz) is: 100.0 | The Samples No.: 8640076 | The Format is: M8EED

Load Record 1  
Load Record 2  
Load Record 3

Directory 1 and path file 1:  
C:\Users\Usuario\Desktop\DATOS\_LA\_PALMA\_2021\_2022\PLPI\La\_Palma\_2021\_PLPI\_HHE\C7.PLPI.HHE.D 2021.019  
Directory 2 and path file 2:  
C:\Users\Usuario\Desktop\DATOS\_LA\_PALMA\_2021\_2022\PLPI\La\_Palma\_2021\_PLPI\_HHE\C7.PLPI.HHE.D 2021.019  
Directory 3 and path file 3:  
C:\Users\Usuario\Desktop\DATOS\_LA\_PALMA\_2021\_2022\PLPI\La\_Palma\_2021\_PLPI\_HHZ\C7.PLPI.HHZ.D 2021.019

Trace Humb  
0  
By default = 0  
Trace Humb  
0  
By default = 0  
Trace Humb  
0  
By default = 0  
Go back  
Exit

Please be careful when loading the three components, indicate the same day.



### 3.- Read and Plot Records Module.

The module for reading and plotting records (ReadSignals.py) allows the reading, filtering, and plotting of seismic records. "Performs the read, filtering and plots the Seismic-signals." The main goal of this initial module is to obtain an initial visualization of the records to decide which folders of records will be used for calculating Shannon Entropy and its envelope. With this interface, graphs can be obtained using one or three components. Similarly, it allows the representation of graphs through various traces (if they exist), which compose some records like MSED. The interface and its components are as follows.

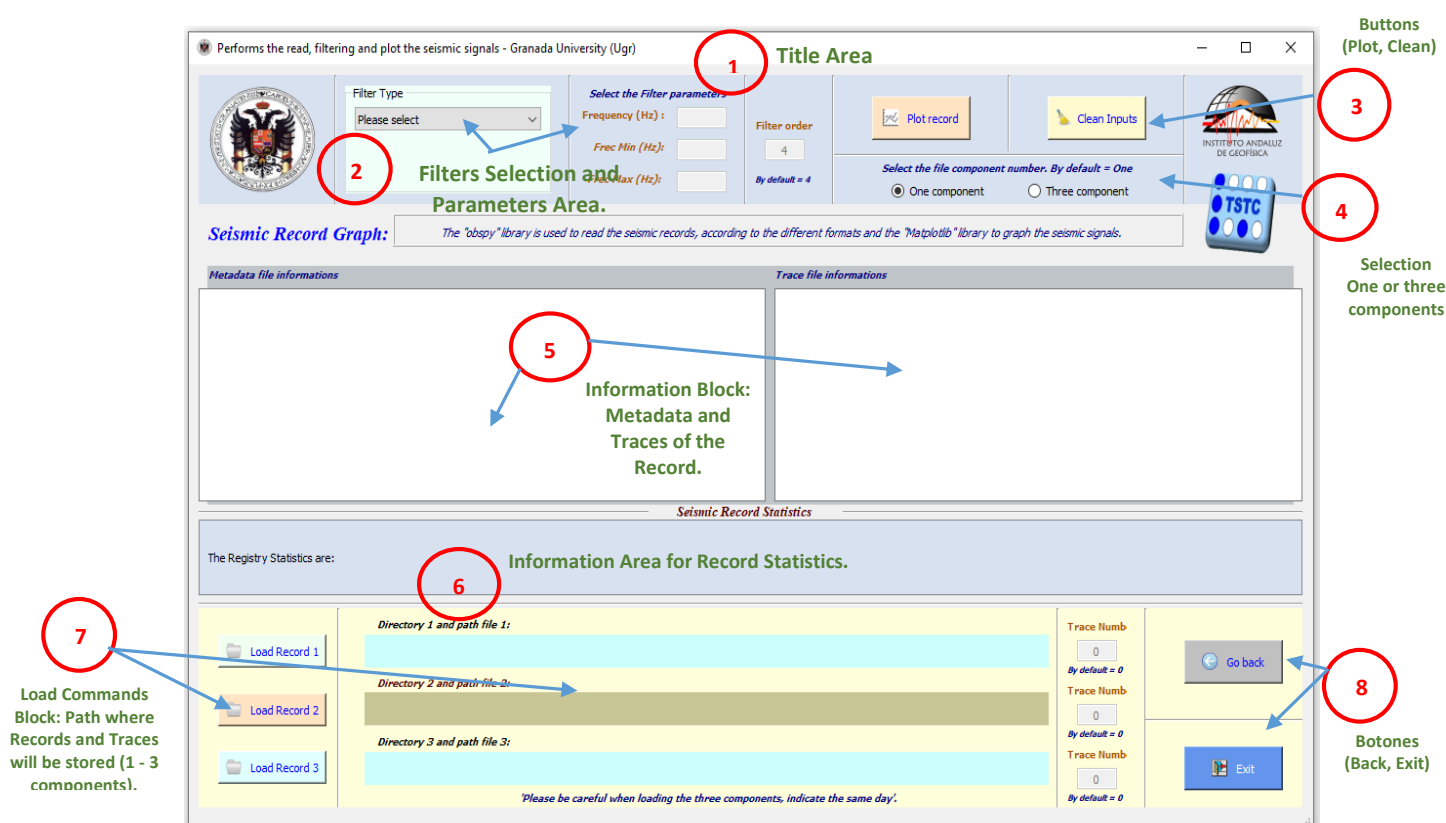


Fig. 7 Interface of the Module for Reading, Filtering, and Plotting Records and its Components.

As observed in the previous figure, the elements that make up this interface are as follows:

- 1) Title Area.
- 2) Filters Area.
- 3) Command Buttons for Plotting and Clearing Inputs (*Plot Record and Clean Inputs*).
- 4) Selection of One or Three Components.
- 5) Metadata and Trace Information Block for the Record.
- 6) Statistics Information Area for the Records.
- 7) Load Commands Block, Path where Records and Traces are Stored (*One or Three Components*).
- 8) Command Buttons for Go Back and Exit (*Go Back and Exit*).


#### 3.1.- Elements of the Reading and Plotting Records Module:

The elements that make up the main screen are detailed below:

### 3.1.1.- Title Area.

1

At the top of the module's interface screen, the following is indicated: The program's name, icon, and the University's name as the title. (1).



In addition to the title area, number (1), various elements of the interface are observed, enumerated from (2-8) in the red circles. Each of these elements will be described below:

### 3.1.2.- Filters Area.

2

They consist of three sections, marked in the green circles in the following picture.

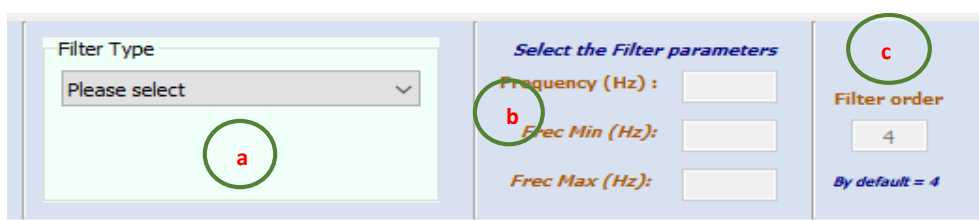


Fig. 8 Filters Area. In the green circles: a) Filter type selection, b) Filter parameter selection, c) Filter order selection.

- a) **Filter Type Selection:** Four filter types are available to choose from: (Lowpass<sup>2</sup>), (Highpass<sup>3</sup>), (Bandpass<sup>4</sup>) and (Bandstop<sup>5</sup>)

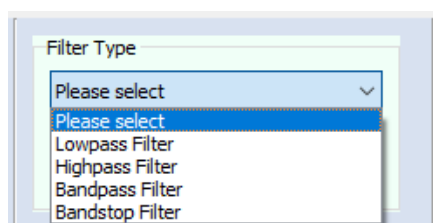


Fig. 9 Filter Type Selection

At the beginning, by default, it is set to "Please Select." Once the user determines or chooses a filter to use, the input parameter boxes (b) will be activated according to the type of selection.

**IMPORTANT NOTE:** Entries in each box are validated to receive only numeric input; entering alphabetic characters or letters is not allowed. Likewise, values are centered in the box, and each value corresponds to the element being entered. For example, the filter order box only accepts integer values up to two digits, while the frequency boxes accept decimal values.

<sup>2</sup> **Lowpass Filter:** The lowpass filter blocks high-frequency signals and allows low-frequency signals to pass through (frequencies lower than the cutoff frequency).


<sup>3</sup> **Highpass Filter:** The highpass filter blocks low-frequency signals and allows high-frequency signals to pass through (frequencies higher than the cutoff frequency).

<sup>4</sup> **Bandpass Filter:** The bandpass filter allows spectral content only in the vicinity of the central frequency. This window is created through a minimum frequency value and a maximum frequency value. It eliminates noise associated with low and high frequencies generated and/or residual.

<sup>5</sup> **Bandstop Filter:** The bandstop filter does not allow the passage of signals whose frequencies are between the upper and lower cutoff frequencies. In other words, it eliminates frequencies or stops a particular frequency band.

- b) **Filter Parameter Selection:** In the case that the user selects the lowpass (*Lowpass*) or highpass (*Highpass*) filter, the frequency box will be activated, part (a) of the figure below, and the other boxes remain deactivated. If the user selects the bandpass (*Bandpass*) and bandstop (*Bandstop*) filters, the minimum frequency and maximum frequency boxes will be activated, part (b) of the figure below. The frequency box remains deactivated. The input values for the data (*centered*) in these boxes are validated to receive decimal numbers.

(a)

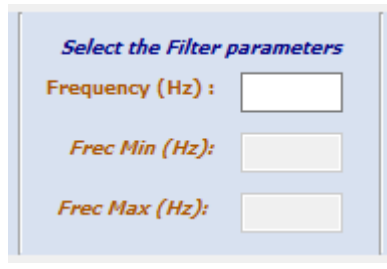

(b)

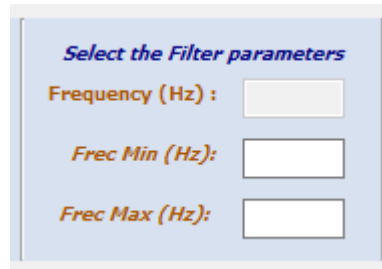


Fig. 10 Selection and entries of parameters according to the selected filter type: (a) **Frequency Box:** For lowpass (Lowpass) and highpass (Highpass) filters and (b) **Minimum Frequency and Maximum Frequency Boxes:** For bandpass (Bandpass) and bandstop (Bandstop) filters.

- c) **Filter Order Selection:** By default, the filter order is initially deactivated and set to a value of 4 (See Figure 11). When selecting any of the four available filter types, this box is activated, allowing the user, if desired, to change the filter order value. The input values for the data (*centered*) in this box are validated to receive only integers up to two digits.



Fig. 11 Selection and Entry of the Filter Order Parameter. By default, its value is set to four (the user can modify the value of this parameter if deemed necessary).

### 3.1.3- Plot and Clear Inputs Command Buttons. (*Plot Record y Clean Inputs*)

3

In this section, there are command buttons that allow for the creation of the plots "*Plot Record*" (a) and clearing of inputs "*Clean Inputs*" (b).

(a)



(b)




Fig. 12 Command buttons for creating plots (*Plot Record*) (a) and clearing inputs (*Clean Inputs*) (b). The texts presented by the buttons when the cursor is placed over them are visible.

- a) **"Plot Record" Command Button:** Initiates the creation of plots once all input parameters have been defined. By default at the beginning, this button is deactivated. It will only be activated when the user selects the type of filter they want to implement with the records.



**NOTE:** Later in this document, the complete action of the button is described (See Section 3.3).

- b) **"Clean Inputs" Command Button:** Clears or erases input elements. Additionally, it closes existing plots and resets the analysis screen to its initial state, ready for a new search and analysis of seismic events.



There is a validation in the execution of this button to prevent any accidental deletion that the user might perform with the input parameters. When clicking this button, a dialog box appears, asking the user if they really want to erase the entries they have made. This window is as follows:

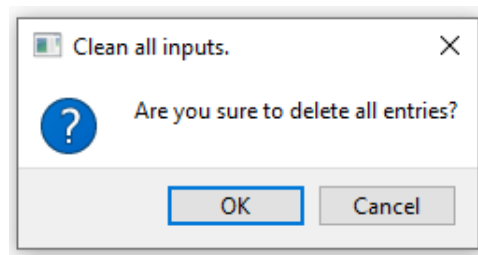


Fig. 13 Verification Dialog Box for User-Initiated Input Deletion.

As observed in the figure, if the user indeed wants to delete the entries, they click the "**OK**" button, which will erase all entries and reset the module interface screen to the initial values, with the boxes deactivated. If, on the other hand, the user does not want this, perhaps due to an error or oversight, they can click the "**Cancel**" button, and the execution will return to the main interface screen.

### 3.1.4.- Selection of One or Three Components.

4

In this section, the user can choose between analyzing one or three components of seismic records.



Fig. 14 Selection of One (a) or Three Components (b) to analyze.

By default, as indicated by the message, it is initially marked to work with one component (a). The user can choose to work with three components (b) by checking the corresponding box. When selecting either one or three components, one or three command buttons for loading records will be activated, as well as one or three boxes for the corresponding traces (See Section 3.1.7).

### 3.1.5.- Block of Information: Metadata and Traces of the Record.

5

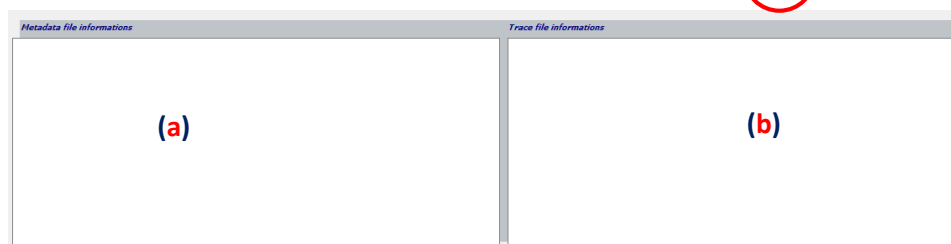


Fig. 15 Image of the section that presents the information contained in the records: **a)** "Metadata" and **b)** "Record Traces".

In these two blocks, the results of the analyses related to metadata **(a)** and traces of the records **(b)** are presented. Something important to highlight in the "Metadata and Record Traces" section is that this area is editable, meaning that you can select and copy the information, then paste it into a Notepad, Word file, etc. If the number of traces of the records **(b)** is varied or more than one, you can copy and paste this information into an Excel file, thus creating a table indicating the number of traces for easier selection later on (See Section 3.3, step "c"). This way, you can consult or use the information contained in the records later. The information will be automatically presented when clicking the "Plot Record" command button. By using the "Clean Inputs" button, the information in these sections will be deleted.

### 3.1.6.- Information Area for Record Statistics.

6




Fig. 16 Visualization Area for Record Statistics.

In this area, the general statistics of the records are presented. The elements that constitute this information are as follows:

- The seismic network that recorded the data.
- The station of that network that recorded them.
- The location.
- The channel through which the data were recorded.
- Initial recording time.
- Final recording time.
- Sampling frequency.
- Number of samples in the record.
- Record Format Type.

### 3.1.7.- Load Commands Block: Path where Records and corresponding Traces are stored (One or Three Components).

7

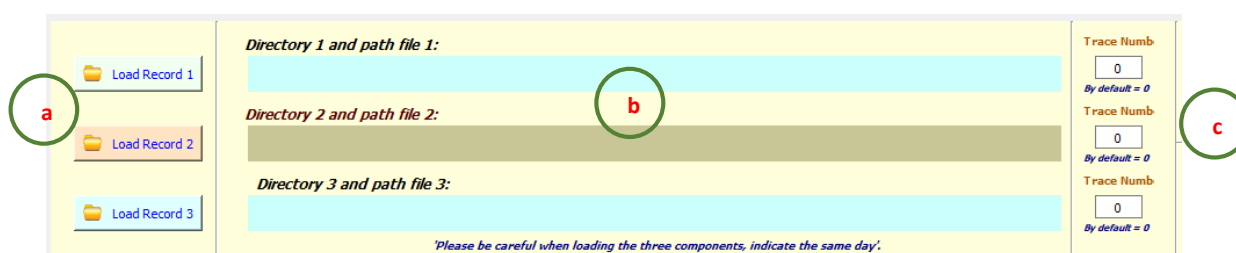


Fig. 17 Section of the Load Records command block: **(a)** Presentation of the directory or physical path where the record is stored, **(b)** trace number of the record and **(c)** In either case, whether it's one or three components.

- a) **Load Commands Block:** This section of the block presents the command buttons for loading records, with one or three components.

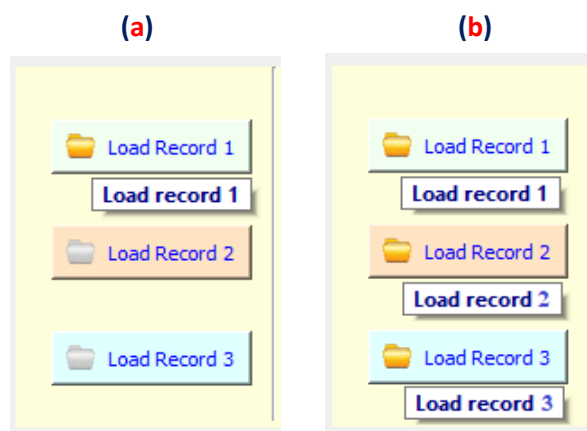


Fig. 18 Section of the command buttons that allow the loading of records. (a) For loading records with one component, (b) For loading records with three components.

By default, these command buttons are initially disabled and will be activated when the type of filter to be used is selected, depending on whether the checkbox for one or three components is marked. As seen in part (a) of the figure, it shows the loading of the seismic record in one component. This happens when in the previous section 3.1.4 the checkbox for one component is selected. In this case, only the first command button for record 1 is activated, and the other two command buttons for records 2 and 3 are disabled. On the other hand, in part (b), it can be observed that all three command buttons have been activated. This occurs when the checkbox for three components has been selected in section 3.1.4.

Clicking any of these buttons opens a Windows dialog box asking for the location where the record to be loaded is stored. This window is similar to the following:

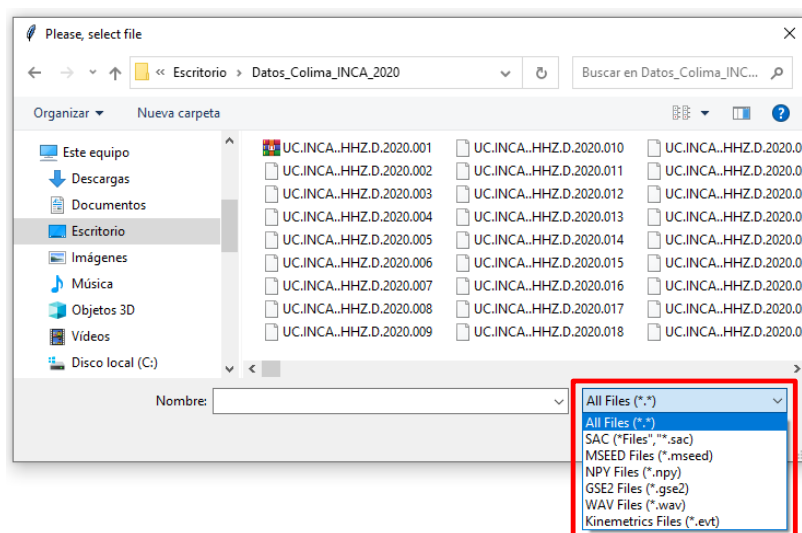


Fig. 19 Screen for selecting records to load.

The action of the "**Load Record**" button allows, upon clicking, the opening of an explorer window (by default, the path is in the root directory "**C**" of the PC), presenting options for various available formats (red box) and allowing for a search in the computer directory.



On the screen in figure 19 (the language is determined by the operating system), records are selected according to the desired format (SAC, MSEED, GSE2, EVT, etc.). This is possible through the seismic format reading library "**Obspy**". Upon selecting the record, it is displayed in the "**Name**" box on the screen, and you can click the "**Open**" button (red box) for the record in the selected directory to be loaded.

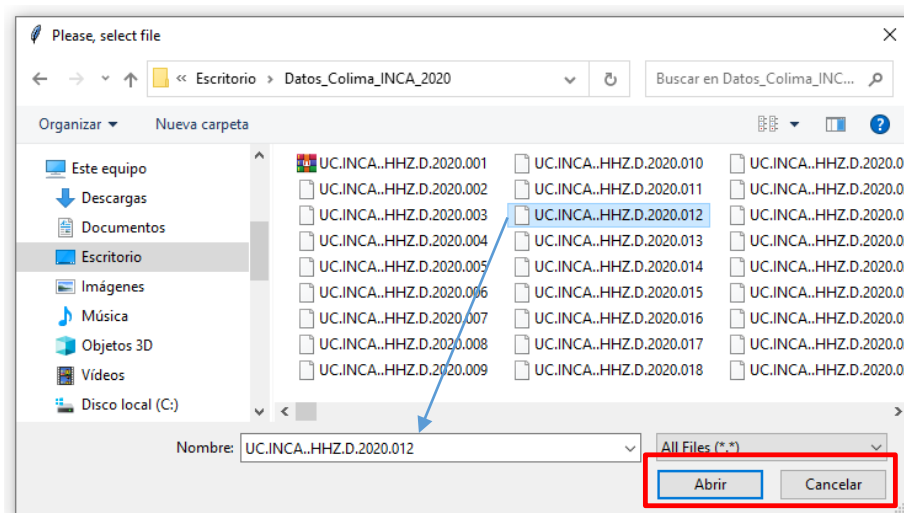


Fig. 20 Screen for selecting a record

Therefore, after selecting the record, click the "**Open**" button, and the record is loaded, and this path is displayed in the loading area to the right of the button (part "**b**", described below). Otherwise, click the "**Cancel**" button, and the action returns to the analysis screen.

- b) Path Area where the records are stored: This second section of the block presents the physical path where the directory and the record (whether one or three components) are located for analysis (after having selected it through the command button in the previous section).

In this way, three spaces are reserved to present the information, depending on whether one or three components of the records are being worked on (File 1, File 2, and File 3).

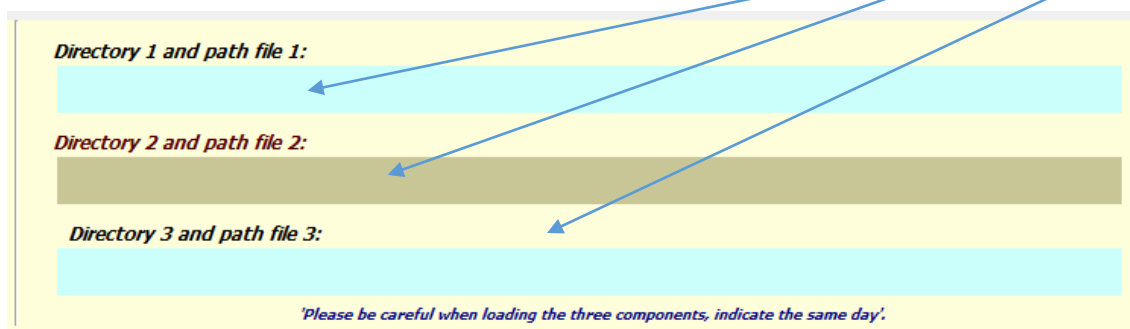


Fig. 21 File path boxes that show the physical location of the records.

**NOTE:** As indicated by the message at the bottom of the previous figure, care must be taken when selecting the three components to indicate the same day for all three components: North-South, East-West, and Vertical.

- c) **Section for the Corresponding Traces (one or three components):** The third section of the block indicates the trace number for each record. It is shown in the following figure.

Fig. 22 Text boxes that show the number of traces for the records. The default value is zero "0".

As seen in the image, by default, the initial value of the trace number is zero "0". In case the record has more than one trace (*in the case of multiple records like MSEED*), the trace number to be displayed is indicated in the text box. Each box corresponds to one record; in the image, one record (*Record 1*) has been designated (*red box*), while the next two boxes (*Records 2 and 3*) are disabled. When selecting three components, these text boxes become active, allowing you to input the corresponding trace number if desired. The validation for these boxes ensures they only accept numbers up to three digits.

### 3.1.8.- This section includes two command buttons: "Go Back" and "Exit."


8

This last block consists of the following elements:

- a) Command button "**Go Back**": Allows you to return to the initial presentation screen of the system (*Main Menu*). When you hover the mouse pointer, it displays a message indicating its function.



- b) Command button "**Exit**": Allows the complete exit from the module and system (after presenting the screen that asks if you want to leave the system). When you hover the mouse pointer, it displays a message indicating its function.

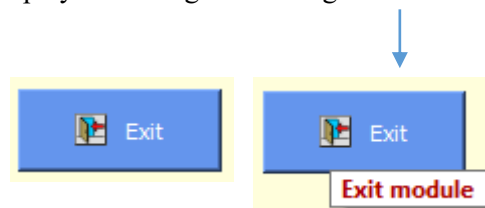

In the same way as on the home screen, if you click the "Exit" button, a window will appear asking the user if they are sure they want to exit the module and system.

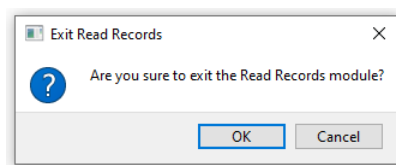



Fig. 23 Text box indicating whether you want to exit the module and system.

Clicking "**OK**" closes the screen and completes the exit of the module and system. Clicking "**Cancel**" will continue on the analysis screen.


### 3.2.- Dialog boxes for validation of errors in records or entries.

In case you want to plot, i.e., click the "**Plot record**" button without entering data in any of the input text boxes, a validation will be displayed. It shows a warning or error dialog box indicating that some action needs to be taken to correct the inputs. Additionally, these dialog boxes allow the program execution to continue without severe interruption due to lack of data. The validations for incorrect inputs are as follows:


- a) Validation for data entry - empty frequency.




- b) Validation for data entry - empty minimum and maximum frequencies.

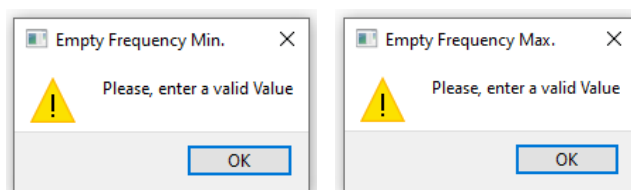


- c) Validation for data entry - empty filter order.




- d) Validation for data entry - empty directories and files.

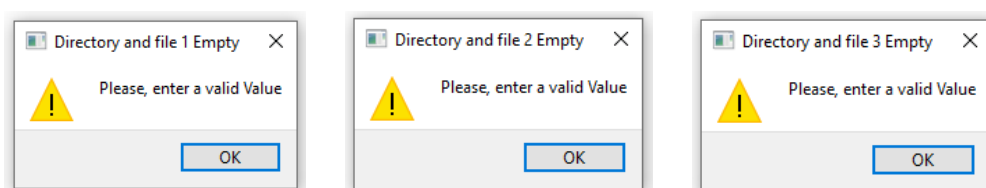

- e) Validation for data entry - empty trace number.

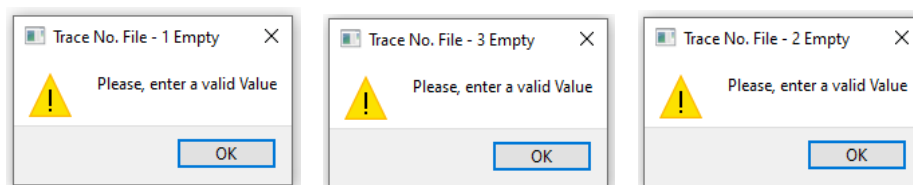

- f) Validation in case of encountering a different input error than the ones mentioned earlier, such as a non-existent or invalid file.

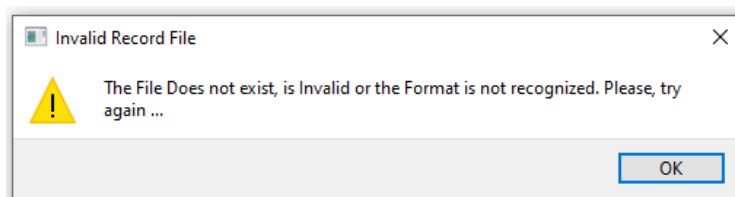

The message in the above figure indicates an input error (*different from the previous ones*) because the format is not recognized, it is invalid, or the record does not exist. Additionally, the parameters or inputs may be outside the allowed range according to the signal to be analyzed. By clicking the "OK" button, you return to the system to choose a valid file or correct the erroneous inputs. This way, the program's execution continues without issues.

### 3.3.- Execution process and results of the reading and graphics module.

The process to load, filter, and plot a record, whether it's a single or three components, is very easy and consists of the following steps (*It is recommended to follow these steps*):

- Select whether you want one or three components (*by default, one component is indicated*).
- Select the filter type (*Lowpass, Highpass, Bandpass, or Bandstop*).
- Enter the parameters for the selected filter type. For Lowpass and Highpass filters, enter a valid *"frequency"* value. For Bandpass and Bandstop filters, enter valid values for minimum and maximum frequencies.
- Enter the filter order if required, or leave the default value = 4.
- Click the *"Load Record 1"* button to select the record to load. In the Windows dialog box, browse or select a specific record. By default, the initial path is in the root directory "C" of the PC (*whether it's Windows or Linux*). Once selected, click the *"Open"* button (the file path is displayed in *Directory 1* and *path file 1*).
- Enter the trace number of the record or leave the default value = 0.
- Click the *"Plot record"* button to plot the record and display the record information.

The description of the previous process is for one component. In case you select three components, you will need to select three records (one for each component), ensuring to select records from the same day for all three components. Similarly, indicate the trace number if required or leave the default value = 0.

Once the above steps are completed, in the final step (g), click the *"Plot record"* button. The output of this process will consist of graphs showing the original signal and the filtered signal. You can *zoom* (*see Section 6, point 5*) in on any part of the graphs, whether in the original or the filtered signal. The graphs are synchronized to automatically adjust and display the same zoom in both. Later, you can save the resulting graph in any of the various available formats.

### 3.3.1.- Example of Reading Procedure for One Component.

As an example, the following process in the interface with the output elements for a single component is presented.

- a) Interface and graphical output for a single component.

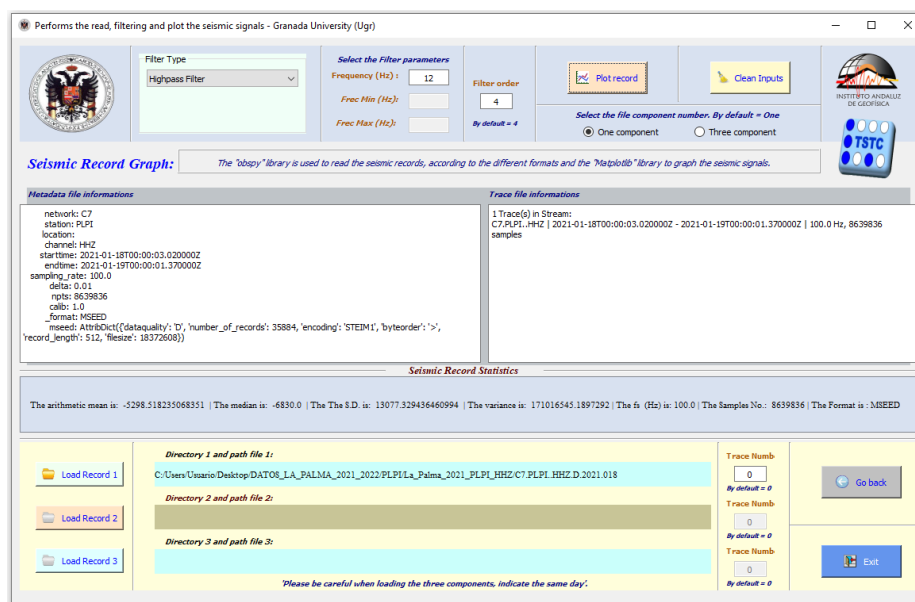


Fig. 24 Outcome of selecting a record with a single component (vertical), using a high-pass filter of 12 Hz. The default values for filter order = 4 and trace number = 0 have been retained.

In the previous figure, the values obtained when loading the single-component record are observed. The input parameters used are: High-pass filter = 12 Hz, Filter order = 4, Trace number = 0. The last two parameters are the default values. The user has only entered the data of the desired file or record selection and the type and value of the filter. The information of the "metadata" and the trace of the record is observed, which in this case consists of a single trace, i.e., the value zero (*trace values start from zero*). Also, the statistics of the record are displayed. The record is one day long, equivalent to 86,400 samples or seconds. The resulting graph is as follows.

Record : C7.PLPI.HHZ.D.2021 - Filtered Record - Highpass

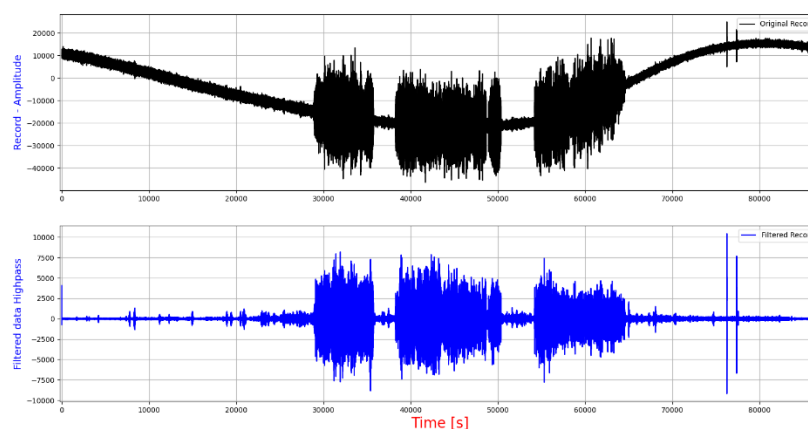


Fig. 25 Graph resulting from the previous process. The upper part shows the original signal, and the lower part shows the filtered signal.

### 3.3.2.- Example of the reading procedure for three components (one and multiple traces).

As an example, the following process of the interface with the output elements for three components is presented.

a) Interface and graphical output for three components with an equivalent trace.

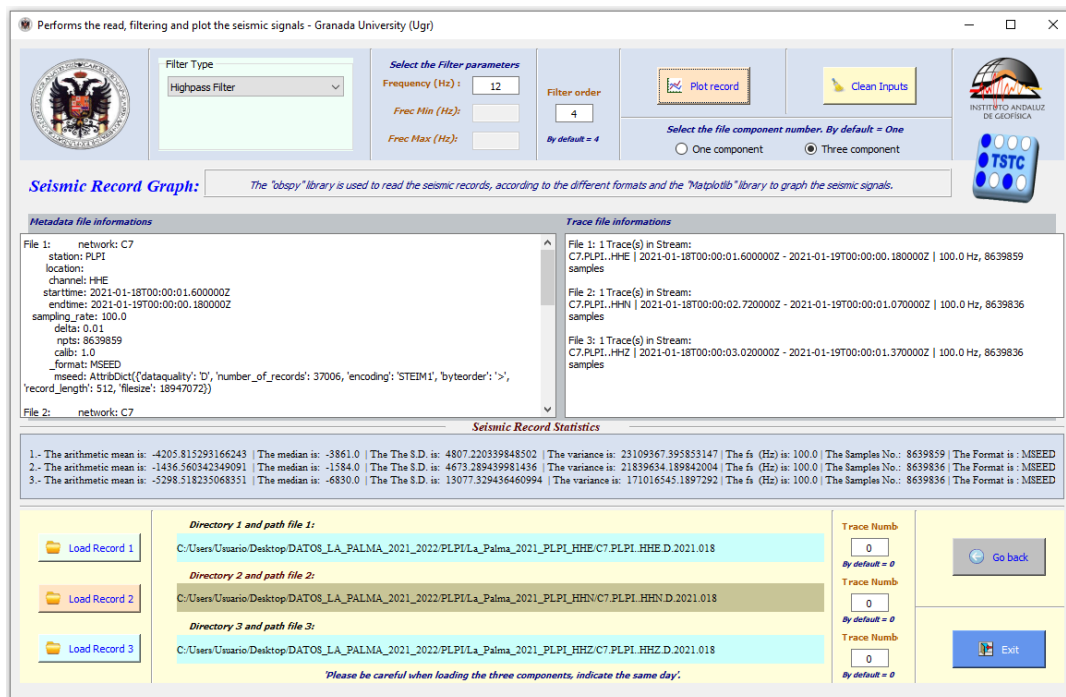


Fig. 26 Result of selecting a record with three components (*East-West, North-South, and Vertical*), using a high-pass filter of 12 Hz. Default values for filter order = 4 and trace number = 0 have been used.

In the previous figure, the same record from January 18th has been loaded for each of the components (*HHE, HHN, and HHZ*). The corresponding values for each record are observed in the metadata, traces, and statistics areas. Since the records consist of a single trace, the default value of zero is used. The resulting graph of this process is as follows.

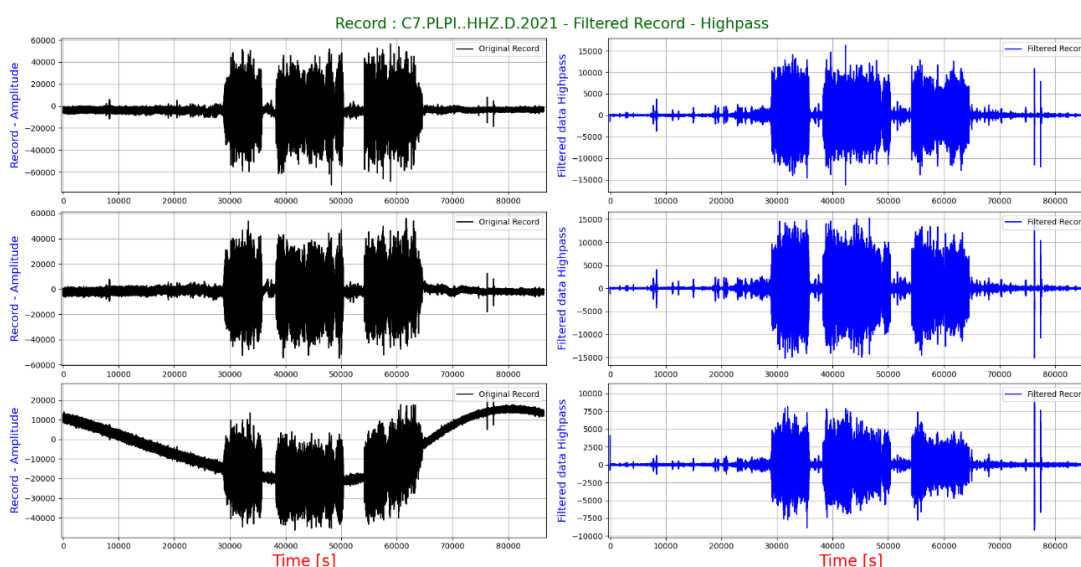


Fig. 27 Graph resulting from the previous process. On the left, the original signals of each component, and on the right, the filtered signals of each component.

b) Interface and graphical output for three components with various and different traces.

In case of dealing with records with more than one trace, the user must decide which trace to choose. This is the case in the following example, with an MSEED record that consists of multiple traces, and in which, within the same record, all three components are present, each in a different trace.

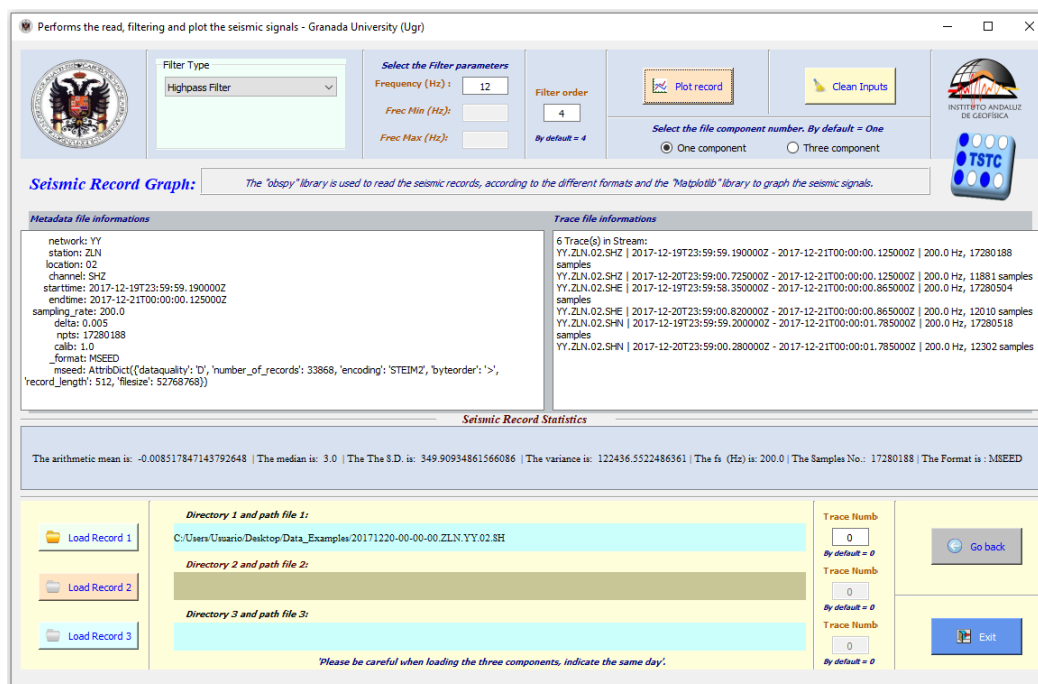


Fig. 28 Result of selecting a record with one component, which has different traces, using a high-pass filter of 12 Hz. The default values of filter order = 4 and trace number = 0 have been left unchanged.

In the above figure, the same record has more than one trace. Additionally, the three components are included in the same record but in different traces. Initially, this result has been presented when analyzing the record with one component, which would result in multiple traces. In this case, it is useful to copy and paste the trace information into an Excel file to count which trace number corresponds to the component. This example is simple, as it only has six traces, but sometimes there are records with more than 70 traces, so analyzing them in this way is helpful. Therefore, in the example, the same record has been loaded into each box, but indicating a different trace corresponding to the appropriate component. The traces with a higher number of samples (*more information*) are: (0) vertical component, (2) east-west component, and (4) north-south component. This can be easily indicated by copying the traces and creating a table in Excel, as shown below. The selected trace numbers (0, 2, and 4, corresponding to components SHZ, SHE, SHN) have been marked.

| Trace Number | Record                                                                                                                |
|--------------|-----------------------------------------------------------------------------------------------------------------------|
| 0            | YY.ZLN.02. <b>SHZ</b>   2017-12-19T23:59:59.190000Z - 2017-12-21T00:00:00.125000Z   200.0 Hz, <b>17280188 samples</b> |
| 1            | YY.ZLN.02.SHZ   2017-12-20T23:59:00.725000Z - 2017-12-21T00:00:00.125000Z   200.0 Hz, 11881 samples                   |
| 2            | YY.ZLN.02. <b>SHE</b>   2017-12-19T23:59:58.350000Z - 2017-12-21T00:00:00.865000Z   200.0 Hz, <b>17280504 samples</b> |
| 3            | YY.ZLN.02.SHE   2017-12-20T23:59:00.820000Z - 2017-12-21T00:00:00.865000Z   200.0 Hz, 12010 samples                   |
| 4            | YY.ZLN.02. <b>SHN</b>   2017-12-19T23:59:59.200000Z - 2017-12-21T00:00:01.785000Z   200.0 Hz, <b>17280518 samples</b> |
| 5            | YY.ZLN.02.SHN   2017-12-20T23:59:00.280000Z - 2017-12-21T00:00:01.785000Z   200.0 Hz, 12302 samples                   |

Table 1. Trace Number of the Record, indicating the three components to which they belong. The traces (0, 2, 4) and components (SHZ, SHE, SHN) are marked, where the highest number of samples, i.e., the most information of the record, is found.



That means the analysis of the same record can be performed, presenting the three components, where different traces need to be indicated in each of the records for each component (*Record 1* = 0, *Record 2* = 2, *Record 3* = 4). Now, a band-pass filter from 1 to 15 Hz is specified to display the images. The interface with the data entry will be as follows:

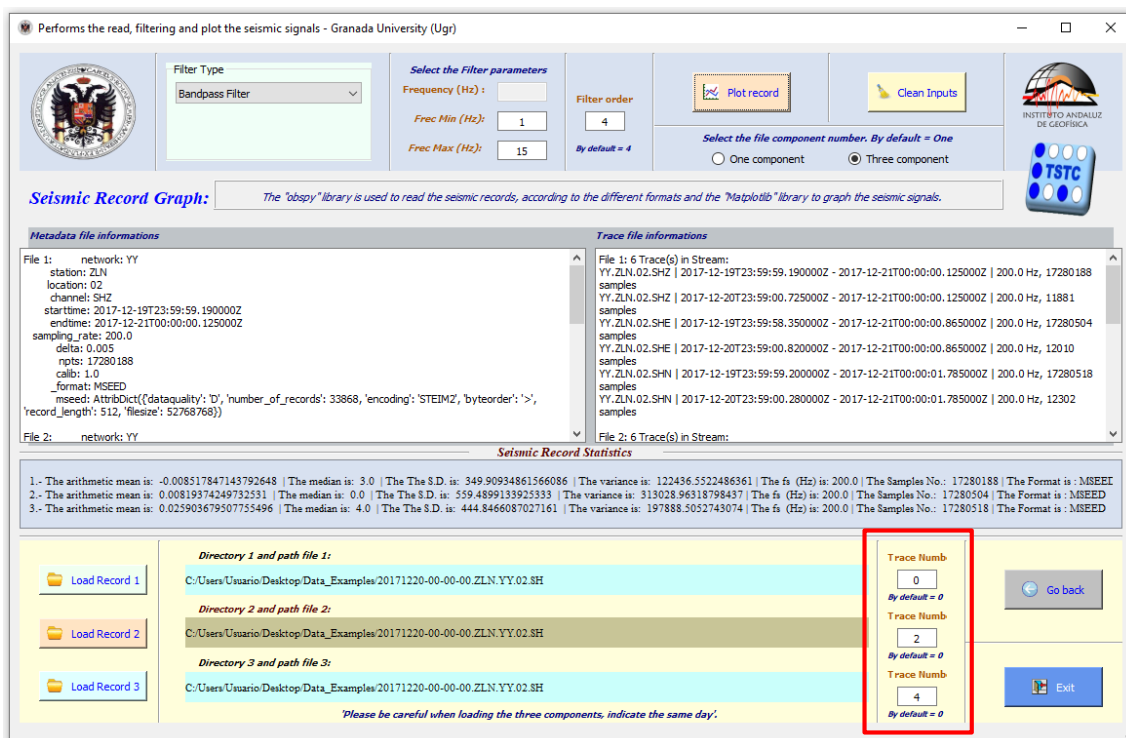


Fig. 29 Result of selecting a record with three components (*East-West, North-South, and Vertical*) that has different traces, using a band-pass filter from 1 to 15 Hz. The default values for filter order (4) are used, and the trace number is indicated for each component (**red box**): Record 1 = 0, Record 2 = 2, Record 3 = 4.

In this way, the resulting graphs from this analysis process are as follows.

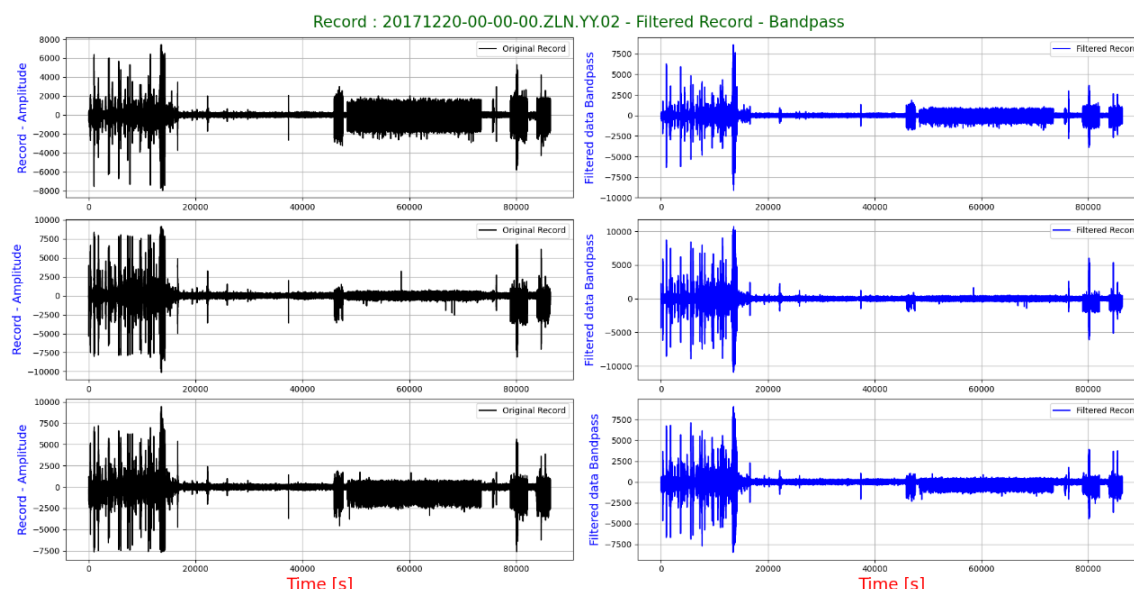


Fig. 30 Graph resulting from the previous process with three components and different traces, using a band-pass filter (1-15 Hz). On the left side, the original signals of each component, and on the right side, the filtered signals of each component.

To observe the resulting images in more detail, you can use the "Magnifier" tool ([zoom - see Section 6, point 5](#)), which will zoom in on the part of the graph that the user is most interested in, allowing for a detailed examination of the events present in the graphs. This can be seen in the following image.

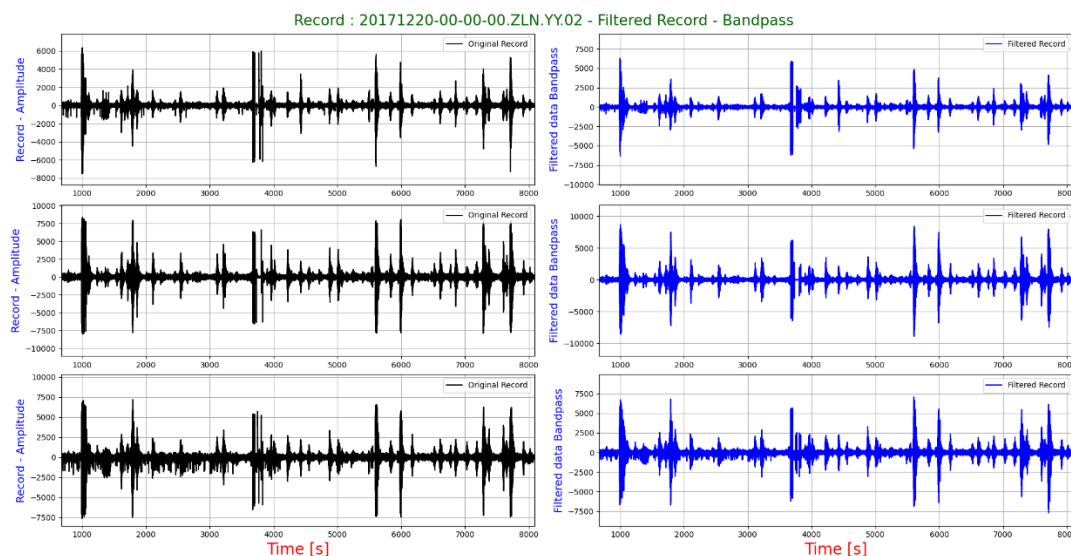


Fig. 31 ZOOM (1000-8000 seconds) of the previous graph (Fig. 30) resulting from the process with three components and various traces. On the left, the original signals of each component, and on the right, the filtered signals of each component.

To visualize in much greater detail, you can zoom in on a specific area. For example, the range between 5600 and 6200 seconds to observe the events. The result is as follows.

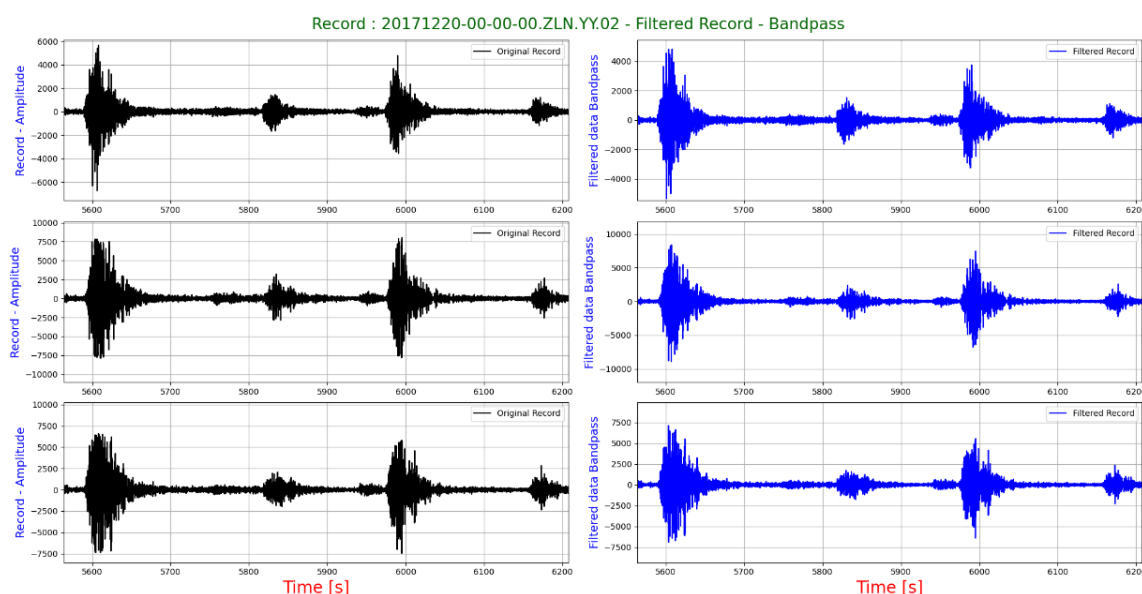


Fig. 32 Zoom (5600-6200 seconds) of the previous graph (Fig. 30) resulting from the process with three components and various traces. Left side shows the original signals of each component, and the right side shows the filtered signals of each component.

**NOTE:** When zooming in any area of an image, the remaining graphs automatically adjust, and the zoom of the three components is presented simultaneously. This is useful for observing either changes in a given time frame or arrivals of P and S waves in all three components at the same time.

## MODULE II

### ENTROPY APPLICATION METHOD FOR SEISMIC-VOLCANIC SIGNALS

#### 4.- Estimator Module of: Shannon Entropy, Kurtosis, Frequency and Energy Index, for the characterization of seismic-volcanic signals.

The module “*Entropy application method for Volcanic Seismic-signals*” (*Entropy1.py*), allows for the reading, calculation, and graphing of four metrics or analysis tools: a) Shannon Entropy, b) Kurtosis, and c) Frequency Index, along with their respective envelopes. The reading of records in various formats, filtering, and calculation results in eight types of graphs from this process, which are:

1. Graph of Shannon Entropy values represented by duration points.
2. Normalized entropy graph represented by duration points.
3. Graph of entropy with its envelope (calculated using a multidimensional median filter) represented by duration points. This calculation can be visualized in various ways by adjusting the envelope window size parameter.
4. Graph containing only the envelope line.
5. Graph containing only the envelope, with a Shannon Entropy Cosine Smoothing algorithm with Hann type windows (Hanning) - (available in the “Initial time” option).
6. Graph of the frequency index with its envelope.
7. Kurtosis graph with its envelope.
8. Energy graph with its envelope

The objective of this second module is to read records contained in a folder for up to one year (365 or 366 records, depending on whether it is a leap year). The module allows for the selection of time intervals and, using filters, performs calculations with various analysis windows (*5 and 10 minutes, one hour, and 24 hours*), where each point represents the calculated value of the window. That is, points for: every 5, 10 minutes, one hour, or 24 hours. Additionally, an envelope is applied. The envelope can assign different parameters: a) Window size: (*50, 100, 200, 300, 700, etc.*), b) Smoothing type (*1-3*), and c) Nan Tolerance (*1 by default*). The larger the envelope value, the greater the spacing of the envelope graph. Therefore, the user must decide which values to set to best represent the smoothness of the envelope. Additionally, two result files will be created and stored in a folder selected by the user. Additionally, two result files will be created and stored in a folder selected by the user.

1. **CSV File:** A Comma-Separated Values file where the data is stored in a tabular structure format, viewable in Excel. This file stores Shannon entropy and normalized entropy values, organized by days and hours within the selected interval or for the entire set of records (*001-365 in Julian days*).
2. **NPY File:** A NumPy matrix file containing an array where all the information is stored to reconstruct the array and graph the calculated Shannon entropy. Through a simple program, the graph of the calculated Shannon entropy can be reproduced instantly.

**Important Note:** When calculating Shannon Entropy, the graphs may show points with very high or negative values (due to reading errors), resulting in graphs with elevated or negative peaks (Cf. Section 4.3.3). To avoid this, it is necessary to review the days to which these points correspond in the CSV results file and remove them from the database or the folder being analyzed. Afterward, the process should be repeated to ensure uniform resulting graphs.

The interface of this module with its main elements is observed in the following image:

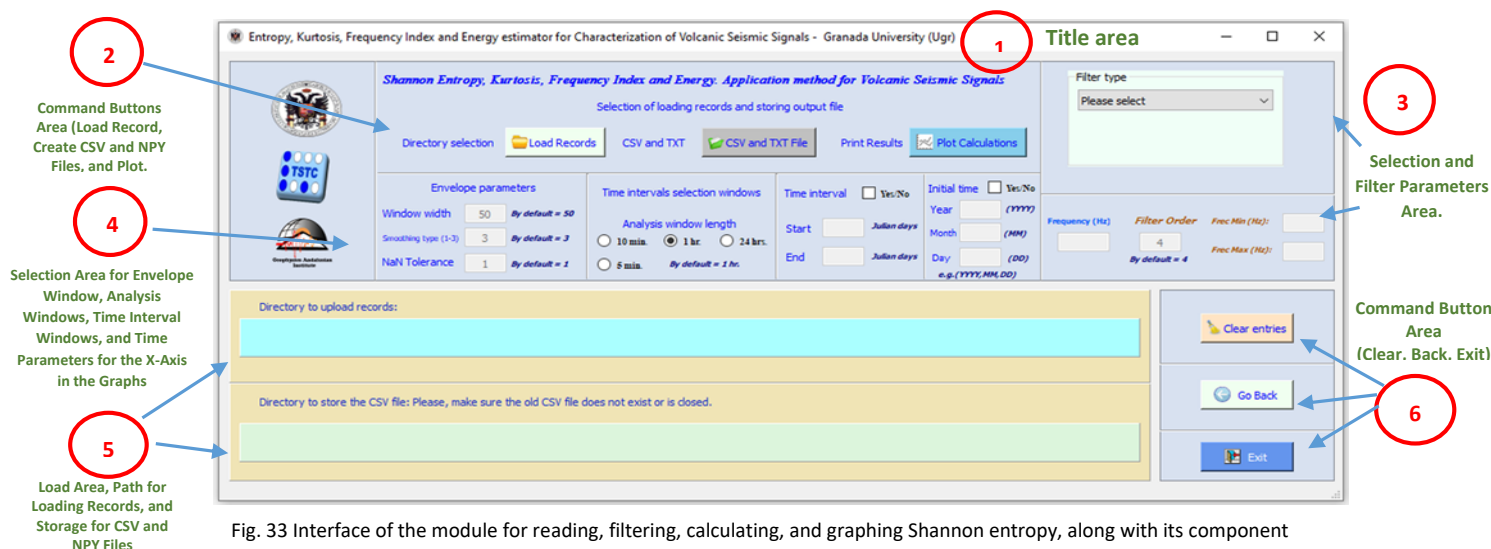


Fig. 33 Interface of the module for reading, filtering, calculating, and graphing Shannon entropy, along with its component elements

As seen in the above figure, the elements that compose this interface are as follows:

- 1) Title Area.
- 2) Command Button Area: (Load record, create CSV and NPY files, and Plot Entropy)
- 3) Selection and Filter Parameters Area.
- 4) Parameters Selection Area:
  - a. Envelope parameters:
    - i. Window Size: (50, 100, 200, 300, 700, etc.). By default, a window size of 50 is determined.
    - ii. Smoothing Type (1-3). By default, a smoothing value of 3 is set.
    - iii. Nan Tolerance (1 by default).
  - b. Selection of analysis window size (5 and 10 min, 1 and 24 hrs). Default value is 1hr.
  - c. Selection of a specific time interval for analysis of the records (start - end). Set in Julian days.
  - d. Set a time interval (year, month, day) for the x-axis in the resulting graphs. The format is in Gregorian calendar (YYYY, MM, DD).
- 5) Load Area or Path, where the records are located and where the resulting CSV and NPY files will be stored.
- 6) Command Button Area: Clear, Go Back, and Exit.


#### 4.1.- Module Elements for Reading, Calculation, and Graphing of Shannon Entropy.

The elements that make up the main screen are detailed below.

##### 4.1.1.- Title area.

1

Located at the top of the module interface, Displays a information or identifier for the module. It includes the program name, icon, and university name as the title. (1).



Title area

In Addition to the title area (1), various elements of the interface are observed, numbered from (2-6) in the *red circles*. Each of these elements will be described below:

##### 4.1.2.- Command Buttons Area: (Load record, create CSV and NPY files, and Plot Entropy)

2


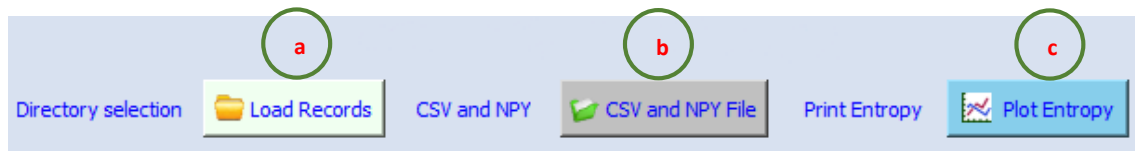


Fig. 34 Command Buttons area: (a) Load record, (b) create CSV and NPY files and (c) Plot Entropy

In the previous figure, the function of the command buttons that are observed is:

- a) “*Load Record*” Button:
 

*Functionality:* Allows the user to load seismic records for analysis.  
Loading the physical “*Path*” from the folder where the seismic records to be processed are located.  
*Appearance:* Button labeled “Load record.”  
When the mouse pointer is placed over it, it displays the text indicating the action to be performed, which is “*Load Records*”.



Clicking the button opens a Windows dialog box that allows the user to select the folder containing the records they want to work with. The dialog box looks similar to the following:

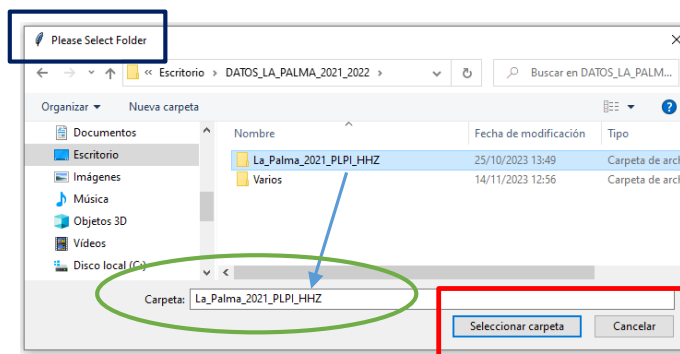


Fig. 35 Dialog Box for Selecting the Folder Where the Records are Located.

As shown in the image above, at the top (*blue box*), the user is instructed to select the folder to work with ("Please Select Folder"). At the bottom (*red box*), the two action buttons are visible, and once the folder is selected, they can be used ("Select Folder" and "Cancel"). By clicking "Select Folder," the name of the chosen folder, indicated by the arrow in blue, appears in the "Folder" area (*green ellipse*), and the **path** is displayed in the loading section (See Section 4.1.5). If you decide not to choose a folder, you can click the "Cancel" button, and the action continues in the main interface to select a new folder.

- b) “CSV and NPY File” Command Button: Specifies the path of the selected folder by the user where the result files "CSV" and "NPY" will be stored.



Upon clicking the button, a Windows dialog box appears (*similar to the previous step*), allowing the user to select the folder where the resulting "CSV" and "NPY" files from the Shannon Entropy calculation process will be stored. The window is similar to Figure 35, indicating to select the folder. Just like in the previous step, the path is displayed in the loading section (See Section 4.1.5).

**NOTE: Important**, it must be closed or no previous CSV file exists, otherwise an error will occur.

- c) “Plot Entropy” Command button: Upon clicking this button, the calculation is performed to obtain the four graphical results of Shannon Entropy and its envelope. Additionally, the resulting "CSV" and "NPY" files are saved in the selected folder.



**NOTE:** The following parameters must be entered beforehand:

- Path, both for the data directory and the directory to save files (CSV and NPY),
- The type of filter with its parameters, input parameters (analysis window size and envelope),
- Activate and enter inputs, in case of performing an interval. Upon clicking the button, if there is any input error, a dialog box indicating the error is displayed (See Section 4.2 - Validation Messages), then the calculation of Shannon Entropy is performed, the four graphical results are presented, and the two resulting files are saved in the previously selected folder.

### 4.1.3.- Filter Selection and Parameter Area.





Fig. 36 Upper Part -> (a) Filter Type Selection (*Lowpass*, *Highpass*, *Bandpass*, *Bandstop*).  
Lower Part -> (b) Filter Parameters (*Frequency*, *Filter Order*, *Minimum Frequency*, *Maximum Frequency*).

In the previous figure, marked with green circles, the two parts of this area are presented and defined as follows:

#### a) Filter Type Selection Area.

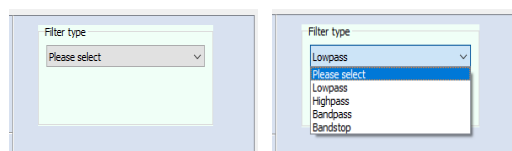

In the above image, the left part initially instructs the user to perform or select the type of filter they want to use. By clicking on this dropdown (*ComboBox*), the available filter options are presented, which are: (*Lowpass*<sup>6</sup>), (*Highpass*<sup>7</sup>), (*Bandpass*<sup>8</sup>) and (*Bandstop*<sup>9</sup>).

**NOTE:** By default, the command button for the calculation and presentation of Shannon entropy results (*Plot Entropy*) is disabled. This button is activated once the user has selected the filter type.

#### b) Filter Parameter Selection and Entry Area.

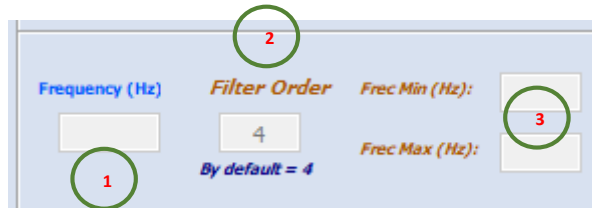


Fig. 37 Filter Parameter Selection Area: (1) Frequency Parameter (Hz), (2) Filter Order Parameter (default = 4), (3) Minimum and Maximum Frequency Parameters (Hz).

- 1) **Frequency Parameter (Hz):** This box is activated when selecting low-pass (*Lowpass*) and high-pass (*Highpass*) filter types. In this selection, the minimum and maximum frequency boxes remain deactivated. Entries in this box are validated to allow decimal numbers.

<sup>6</sup> **Lowpass Filter:** The lowpass filter blocks high-frequency signals and allows low-frequency signals to pass through (*frequencies lower than the cutoff frequency*).

<sup>7</sup> **Highpass Filter:** The highpass filter blocks low-frequency signals and allows high-frequency signals to pass through (*frequencies higher than the cutoff frequency*).

<sup>8</sup> **Bandpass Filter:** The bandpass filter allows spectral content only in the vicinity of the central frequency. This window is created through a minimum frequency value and a maximum frequency value. It eliminates noise associated with low and high frequencies generated and/or residual.

<sup>9</sup> **Bandstop Filter:** The bandstop filter does not allow the passage of signals whose frequencies are between the upper and lower cutoff frequencies. In other words, it eliminates frequencies or stops a particular frequency band.



- 2) **Filter Order Parameter:** By default, this parameter is set to a value of four (4) at the beginning. This input box is activated when selecting any of the four available filter types. It allows the user to enter a different (*valid*) filter order value (2, 6, 8, 12, etc.). The entry in this box is validated to accept only two-digit integers.

- 3) **Minimum and Maximum Frequency Parameters (Hz):** These two text boxes are activated when selecting the filter types; Bandpass and Bandstop. In this selection, the Frequency (Hz) input box is deactivated. The entries in these two boxes are validated to allow decimal numbers.

**NOTE:** In the image above, all data entry boxes shown are initially deactivated by default. They are also validated to only accept numerical input and not alphabetic characters or letters. The values to be entered in these boxes will be centered in the text boxes.

#### 4.1.4.- Selection area of: intervals, analysis windows, and envelope window.

Fig. 38 Selection Area for Intervals, Analysis Windows, and Envelope Window: (a) Selection of envelope parameters (b) Selection of analysis window size (5 and 10 minutes, 1 hour, and 24 hours, default is set to 1 hour). (c) Selection of time interval. These text boxes are disabled; by checking the box (Yes/No), it indicates whether a time interval is desired ("YES"), default is blank indicating "NO" (Input the initial day and final day desired in Julian days). (d) Selection of the initial time interval to be represented on the x-axis (indicated in Gregorian days with format YYYY, MM, DD).

In the image above, marked with green circles, the four sections (a-d) that make up this area are observed.

##### a) Envelope Parameter Selection:

In this box, the user inputs the values for envelope parameters, indicated in three entries:

- Window Size (default is set to 50),
- Smoothing Type (default is set to 3),
- NaN Tolerance (default is set to 1).

**NOTE:** When the user selects the data folder to work with, the number of data points is included, even if the number of records is less than 365. This only indicates the maximum number of data points to be used. If you wish to work with a smaller number, for example, a month, the easiest and most viable option is to use the time interval and specify it in section (c), leaving this value by default to represent the maximum size to be analyzed.

An example of analysis with various window sizes to observe the smoothing of the envelope is shown in Figure 41.

b) Selection of the analysis window.

Figure 39 shows four panels of the 'Analysis window length' selection interface. Each panel has radio buttons for 10 min, 1 hr, and 24 hrs, and a text input for 5 min. The default is 1 hr. The panels are labeled 1, 2, 3, and 4, corresponding to the selected window length.

Fig. 39 In this area, the user indicates the size of the analysis window: (1) 1-hour window, (2) 5-minute window, (3) 10-minute window, and (4) 24-hour window.

In this box, the user selects the analysis window desired for applying to the data: (5 and 10 minutes, 1 hour, and 24 hours). The default entry in this box is set to one hour. The user can select any of the window sizes at the beginning by clicking on the indicated area. As shown in the image above, the user at point (1) has selected to work with one-hour windows (the default value), at point (2) with 5-minute windows, at point (3) with 10-minute windows and at point (4) with 24-hour windows. The validation of this section indicates that by clicking on a specific value, that point is selected, and the other three remaining points are deactivated.

c) Time interval selection.

Figure 40 shows two panels of the 'Time interval' selection interface. The left panel (1) shows the 'Yes/No' checkbox unchecked, and the right panel (2) shows it checked, activating the 'Start' and 'End' text boxes.

Fig. 40 The figure shows the box where the user determines whether a time interval will be used to analyze the data: (1) Initial position, an empty value in the "Yes/NO" box, indicating a "NO" value (2) The "Yes/NO" box is checked, indicating a "YES" value, activating the "Start" and "End" text boxes to enter dates in Julian days.

In the box above, it can be observed that part (1) is set with the default initial values, meaning it is not selected, indicating that the time interval is **NOT** desired, and the text boxes indicating date entries (*Start and End*) in Julian days are deactivated. In part (2), the "Yes/No" box has been selected or marked, indicating that **YES**, the time interval is desired. To do this, the user must also select the filter type, which activates the text boxes for start (*Start*) and end (*End*) dates, expressed in Julian days. In the example shown in the figure, the start and end dates are entered as values (274-304) respectively, meaning that the records for the month of "October" in a non-leap year (2014, 2015, 2017, 2019, 2021, 2023, etc.) will be analyzed. Data entry in these boxes is validated to accept only valid integer numbers (*three digits*), centered in the box.

d) Selecting the **initial time** interval to plot on the x-axis.

The box on the right indicates entering an initial time interval (using year, month, and day values – YYYY, MM, DD) for the calculation. When the "Initial time" box is clicked (activated), the input values are programmed to enter only numbers and not alphabetic characters: four positions for the year (YYYY), two positions (MM) for the month, and two (DD) for the day. With these values, the coordinate axis (x) will represent the dates starting from the entered start date.

Figure 41 shows a form for entering an initial time interval. It includes a 'Yes/No' checkbox and input fields for Year (YYYY), Month (MM), and Day (DD).

The graph below reflects various sizes of the envelope window (Point "a" page 30).

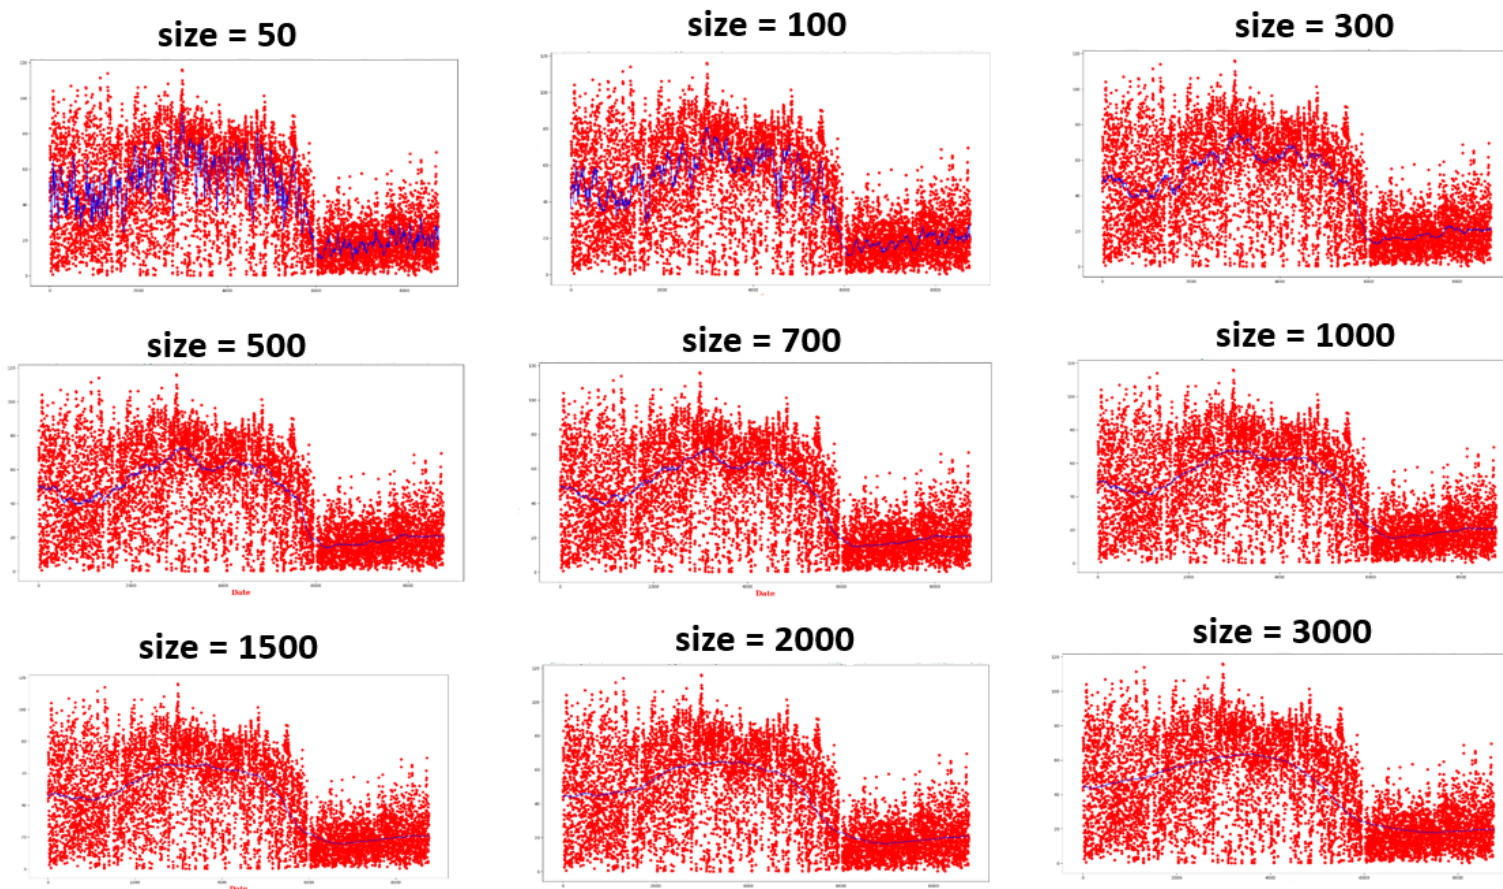


Fig. 41 Example of a comparative graph over a year of records, showing various envelope window sizes such as: (50, 100, 300, 500, 700, 1000, 1500, 2000 y 3000).

In the previous figure, the results for a year of records are presented, showing that the envelope line becomes smoother with a larger window size. However, the user must assess and decide which size to use based on the expected results. A larger window size significantly smoothes the slope of the envelope but may also result in various peaks or jumps in the envelope at different parts of the signal, depending on the number of records present in a given year.

#### 4.1.5.- Path Area (*Directory or Folder*)

Fig. 42 The area where the directories or folders for the actions of the command buttons "*Load Records*" (a) and "*CSV and NPY File*" will be displayed (b).

In the image above, the two areas where the directory paths will be visualized for the actions of the command buttons "*Load Records*" and "*CSV and NPY File*" are shown, as described in section 4.1.2.

- a) Path Area (***Directory or Folder***): The area where the path or directory containing the records to be processed will be displayed.
- b) Path Area (***Directory or Folder***): The area where the path or directory where the "*CSV*" and "*NPY*" result files will be stored or saved will be displayed.

**NOTE 1:** It is important that there are no existing CSV files; otherwise, an error will occur.

**NOTE 2:** It is crucial that these two areas are defined before clicking or executing the "*Plot Entropy*" command button (see Section 4.2, point (c)), which performs the calculation, printing, and results of Shannon Entropy and its envelope. Otherwise, data validation dialog boxes will appear (see section 4.2).

#### 4.1.6.- Command Buttons Area: (Clean, Go Back, and Exit).




Fig. 43 Command buttons area: (a) Clear entries, (b) Go Back and (c) Exit.

In the figure above, the functions of the observed command buttons are:

- a) "**Clear entries**" command button: This button clears or erases the input elements, closes existing charts, and resets the analysis screen to its initial state, ready for a new search and calculation of Shannon Entropy with seismic events. (*The text displayed when hovering over the button is shown*).



A validation is introduced when executing this button to prevent accidental deletion of user-input parameters. Clicking this button prompts a dialog box asking the user if they really want to delete the entries. The dialog box looks like the following:

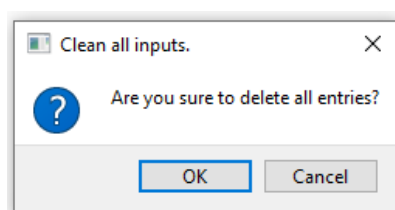


Fig. 44 Verification Dialog Box for User-Initiated Entry Deletion.

As seen in the figure, if the user indeed wants to delete the entries, they click the "**OK**" button, and all entries will be removed. The interface screen of the module will then present the initial values with the checkboxes deactivated. If, on the other hand, the user pressed the cleanup button by mistake or does not want to proceed, they click the "**Cancel**" button, and the execution returns to the interface screen.

- b) "**Go Back**" command button: This button allows the user to return to the initial presentation screen of the system (*main menu*). Hovering the mouse pointer over it displays a message indicating its function.



- c) "**Exit**" command button: This button enables the complete exit from the module and the system (*following the presentation of a screen asking if the user wants to leave the module and the system*). Hovering the mouse pointer over it displays a message indicating its function.



Similarly to the startup screen, if the "**Exit**" command button is pressed or clicked, a window appears asking the user if they are sure about leaving the module and the system. This window looks like the following:

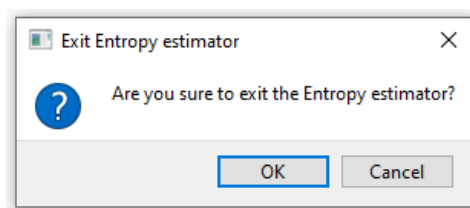



Fig. 45 Text box indicating whether you want to exit the module and system.

On clicking "OK," the screen closes, and the module and system exit is completed. Clicking "Cancel" will continue on the Shannon Entropy calculation screen.


#### 4.2.- Validation of Errors in Record or Entries.

In the event of attempting to calculate and plot Shannon Entropy by clicking the "Plot Entropy" button without entering data in any of the required input boxes or text fields, a validation will occur. This will display a dialog box indicating that this action needs to be performed, and input errors should be corrected. Additionally, these dialog boxes allow the program execution to proceed without severe interruption of the system due to data absence. The validations for incorrect inputs include:


- a) Validation for data entry - Records directory empty.

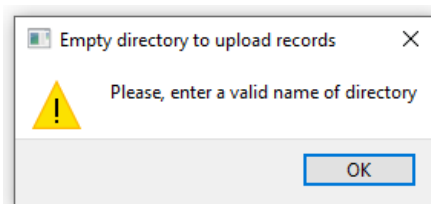

- b) Validation for data entry - "CSV" and "NPY" File directories empty.

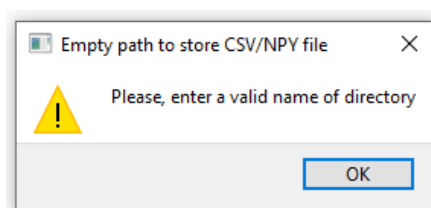


- c) Validation for data entry – Envelope Parameters.

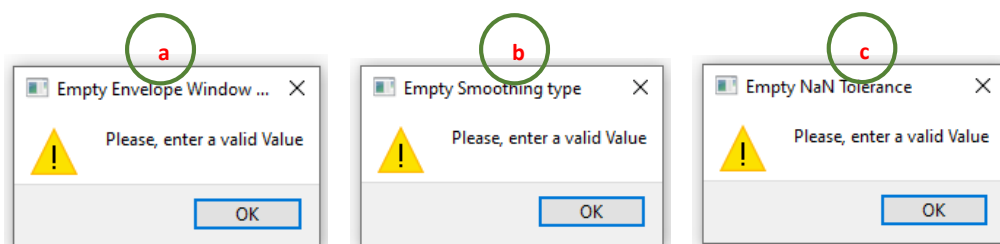


(a) Empty Envelope Size Value. (b) Empty smoothing value. (c) NaN Tolerance at empty value.

- d) Validation for data entry – Empty initial and final time interval.

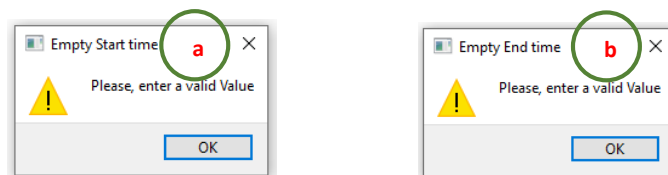


(a) Empty initial time interval value. (b) Empty End time interval value.

- e) Validation for data entry – Initial time interval for the x-axis.

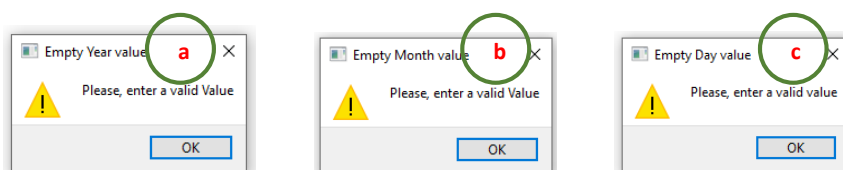


(a) Empty year value. (b) Empty month value. (c) Empty day value.


- f) Validation for data entry – Empty Frequency value.




- g) Validation for data entry – Empty Minimum Frequency value.



- h) Validation for data entry – Empty Maximum Frequency value.




- i) Validation for data entry – Empty Filter Order Value.





- j) Validation in case of encountering a different input error than the ones mentioned earlier, such as a non-existent, invalid file or CSV file open.

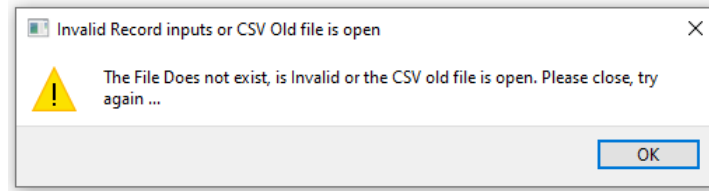

According to the message in the above figure, an error has occurred because the format is invalid, the record does not exist, or the previous CSV file is open. Additionally, parameters or entries may be outside the allowed range according to the signal to be analyzed. Clicking the "OK" button returns to the system to choose a valid file or correct erroneous entries or close the CSV file and repeat the process. This allows the program to continue executing without troubles.

#### 4.3.- Execution Process and Results of the Shannon Entropy, Kurtosis, Frequency Index and Energy Reading, Calculation, and Graphing Module.

The process to load records, filter, and graph Shannon Entropy (original and normalized) and its envelope is straightforward and involves the following steps (*it's recommended to follow these steps*):

- a) Select the directory where the records are located by clicking the "[Load Record](#)" command button. Once selected, click the "[Open](#)" command button (*the file path is displayed in the "Directory to Upload Records" area - See 4.1.5*).
- b) Select the directory where the result files "[CSV](#)" and "[NPY](#)" will be stored by clicking the "[CSV and NPY File](#)" command button. Once selected, click the "[Open](#)" command button (*the file path is displayed in the "Directory to Store the CSV File" area - See 4.1.5*). Remember, **not** to have a similar CSV file open simultaneously.
- c) Select the filter type ([Lowpass](#), [Highpass](#), [Bandpass](#), or [Bandstop](#)). This will activate the parameter input boxes based on the indicated selection.
- d) Select the analysis window size: 5-10 min/1-24 hr (*default is one hour*).
- e) Select the Envelope parameters or leave the default value = (50, 3, 1).
- f) (**OPTIONAL**) Select or check the box ([if required](#)) to analyze a specific time interval. If positive, enter the start time in Julian days in the "[Start](#)" box and the end time in Julian days in the "[End](#)" box.
- g) Enter the filter parameter values according to the selected type. For [lowpass](#) and [highpass](#) filters, enter a valid "[frequency](#)" value. For [bandpass](#) and [bandstop](#) filters, enter valid values for "[minimum frequency](#)" and "[maximum frequency](#)".
- h) Enter (*if required*) the filter order or leave the default value = 4.
- i) (**OPCIONAL**) Select or check the box (*if required*) to choose a specific initial time interval (Year, month, day) for values on the x-axis. If positive, indicate in the boxes: "YYYY, MM, DD" the start time in Gregorian days.
- j) Finally, click the "[Plot Entropy](#)" button to calculate Shannon Entropy, display the four graphs, and store the two resulting files in the designated folder.

As indicated in the last step, once the above steps have been completed, click on the "Plot record" button. The output of this process will consist of the six graphs ([Shannon Entropy](#), [Normalized Shannon Entropy](#), [Shannon Entropy with envelope](#), [Envelope-only graph](#), [Frequency Index with envelope](#), and [Kurtosis with envelope](#)). When the graphs are presented, you can zoom in (using the "Magnifying Glass (point 5)" tool - Refer to Section 6), on any part of them to observe the entropy's progression over time in much greater detail. The resulting files (CSV and NPY) can be found in the folder previously selected by the user for storage.

### 4.3.1.- Example of Shannon Entropy Calculation Procedure with a 1-hour Analysis Window.

As an example, the following interface process with the elements is presented for an analysis of seismic records for one year (2014). The output parameters of the tool calculation (*Shannon Entropy, Kurtosis, Frequency Index, and Energy*) with their respective envelopes designate an analysis window of one hour duration (by default). That is, each point equals one hour.

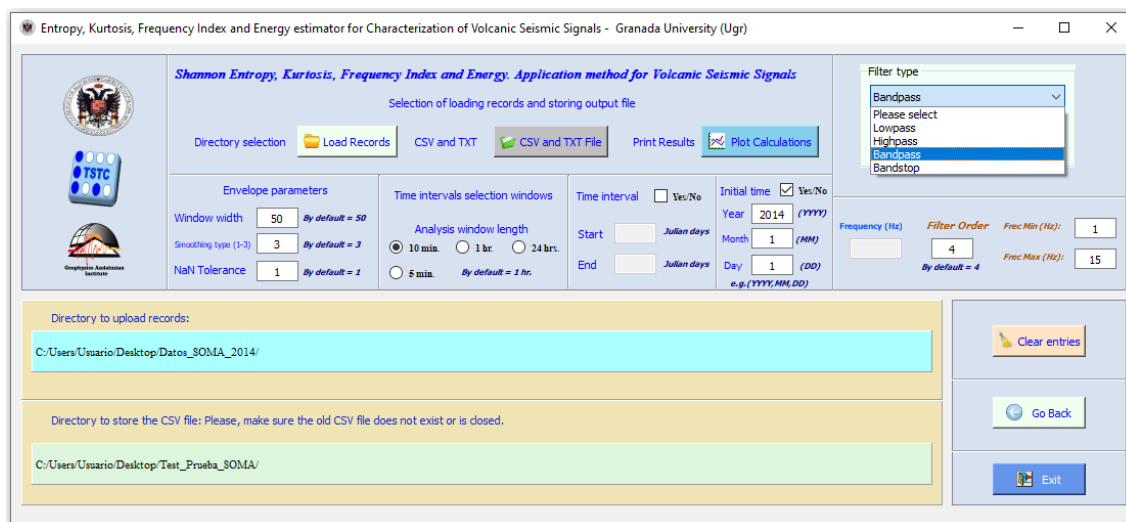


Fig. 46 Interface of the Shannon Entropy, Kurtosis, Frequency Index and Energy calculation module, and their envelopes, with the selected data for a one-hour analysis window, envelope window size of 50, smoothing type 3, Nan Tolerance with the default value = 1, and assigning a band-pass filter from 1 to 15 Hz. An initial time is established.

In the above figure, the obtained values when loading one year's worth of records are observed (*the interval time field is not used*). The input parameters used are:

- Envelope parameters (Default values: 50, 3, 1).
- Analysis window to use = one hour (*Default value*).
- Time interval (Not designated).
- Initial time interval for the x-axis (*2014-01-01 is designated*).
- Filter type = Bandpass (*1 – 15 Hz*).
- Filter order. The default value is used = 4.

As observed, the process is extremely simple. Here, the user only had to specify:

- 1) The folder where the data is located,
- 2) The folder where the two result files will be stored,
- 3) The filter type, and
- 4) The filter parameters.

\* the remaining input values are the default ones.

Next, click on the "*Plot Entropy*" button, and the calculation and presentation of results are carried out. The eight result graphs, with a Zoom included between the time interval (*2014-07 to 2014-09*), obtained from this procedure are observed in the following pages below:

a) **Left:** Shannon Entropy Calculation Graph. **Right:** Zoom into a specific area (2014-07 to 2014-09).

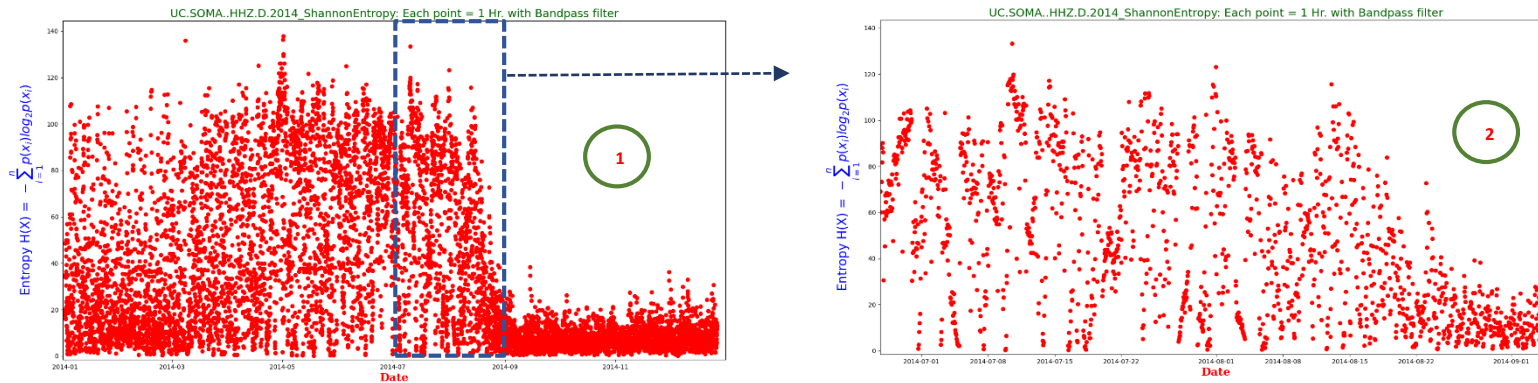


Fig. 47 (1) Graph of the Shannon Entropy calculation results. (2) Zoom into the area highlighted in blue, covering a time interval from 2014-07 to 2014-09.

b) **Left:** Normalized Shannon Entropy Calculation Graph. **Right:** Zoom into a specific area (2014-07 to 2014-09).

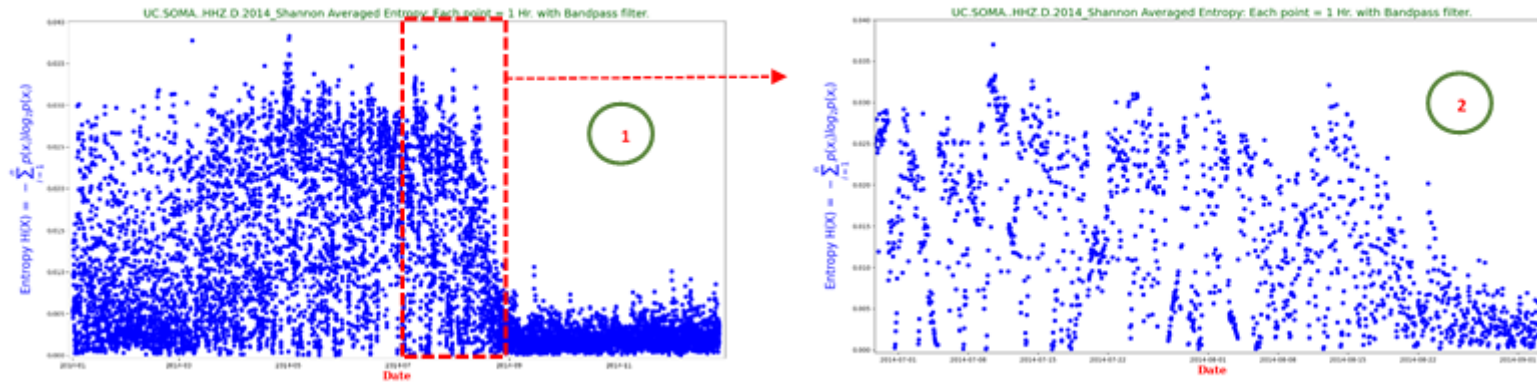


Fig. 48 (1) Graph of the results of the Normalized Shannon Entropy calculation. (2) Zoom into the area highlighted in red, covering a time interval from 2014-07 to 2014-09.

- c) **Left:** Graph of Shannon Entropy Calculation and its Envelope. **Right:** Zoom into a specific area (2014-07 to 2014-09). The peaks present are mostly determined by seismic swarms.

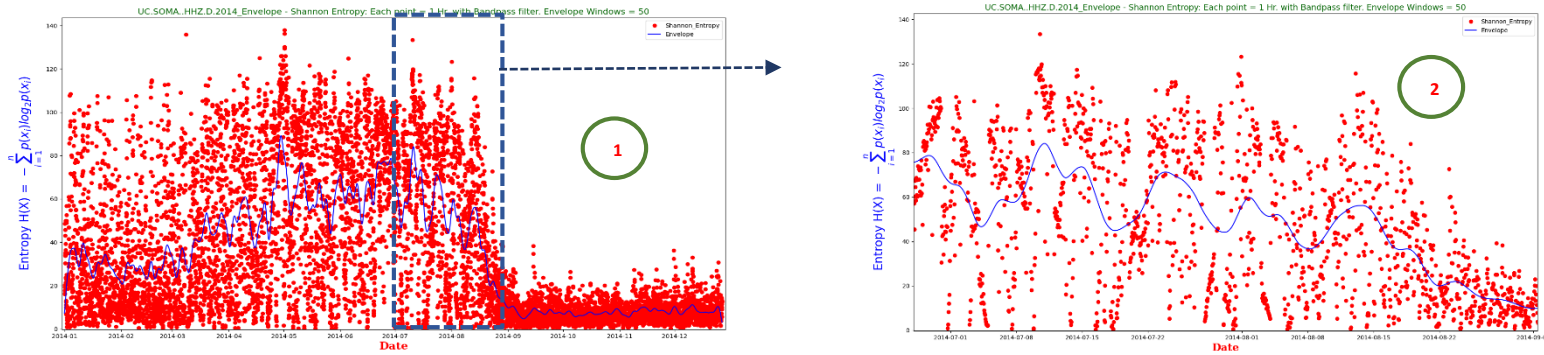


Fig. 49 (1) Graph of the results of Shannon Entropy calculation and its envelope. (2) Zoom into the area highlighted in blue, covering a time interval from 2014-07 to 2014-09.

- d) **Left:** Graph of the representation of only the envelope of Shannon Entropy. **Right:** Zoom into a specific area (2014-07 to 2014-09).

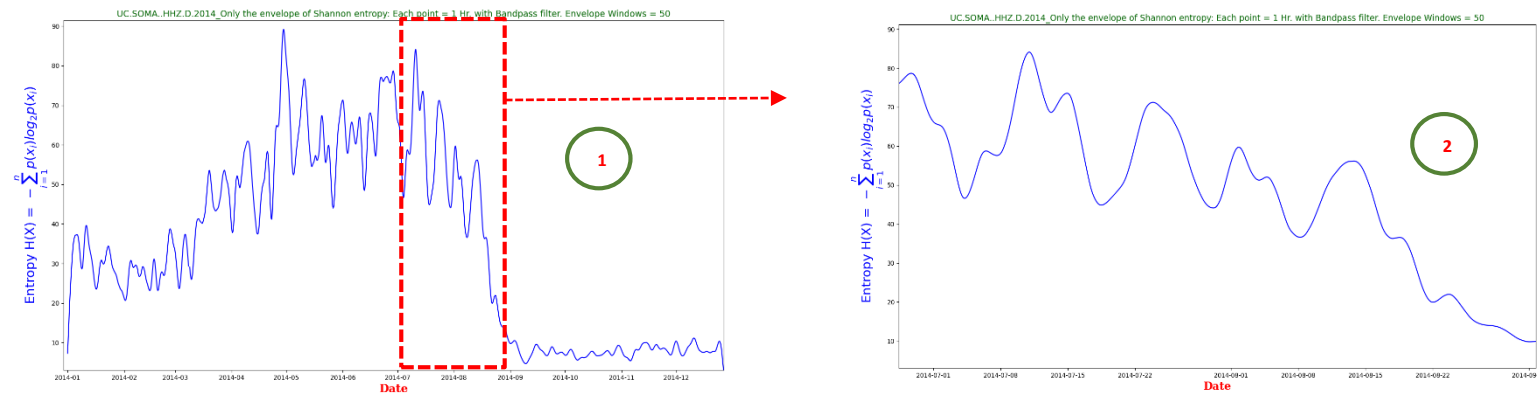


Fig. 50 (1) Graph of the results of Shannon Entropy calculation and its envelope. (2) Zoom into the area highlighted in red, covering a time interval from 2014-07 to 2014-09.

- e) Left: Shannon Entropy Envelope using a Cosine Smoothing algorithm. Right: Zoom in on a specific area (2014-07 to 2014-09).

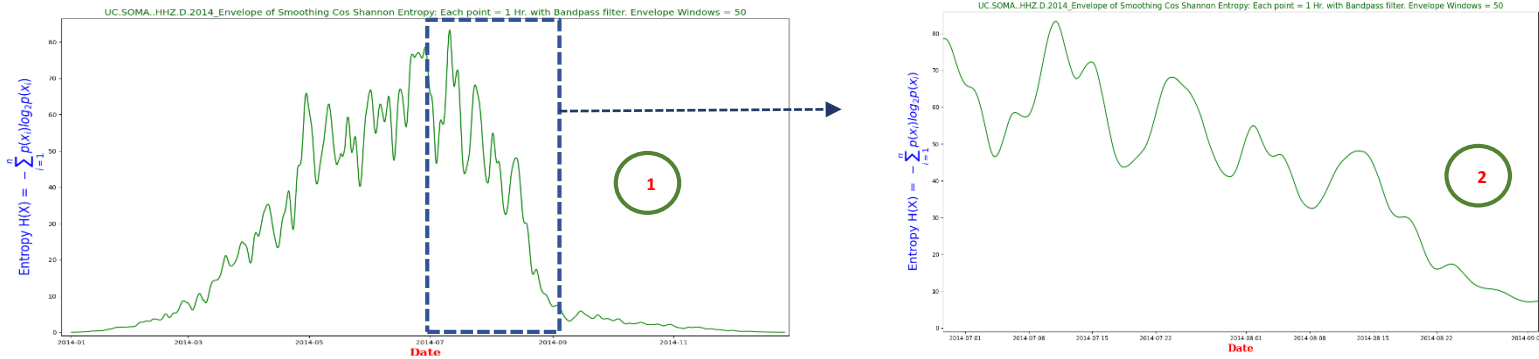


Fig. 51 (1) Graph of the results of calculating the Shannon Entropy envelope with a Cos smoothing algorithm. (2) Zoom into the area highlighted in blue, covering a time interval from 2014-07 to 2014-09.

- f) Left: Graph of the Frequency Index calculation and its envelope. Right: Zoomed-in view of a specific area (2014-07 to 2014-09). The peaks observed are largely determined by seismic swarms.

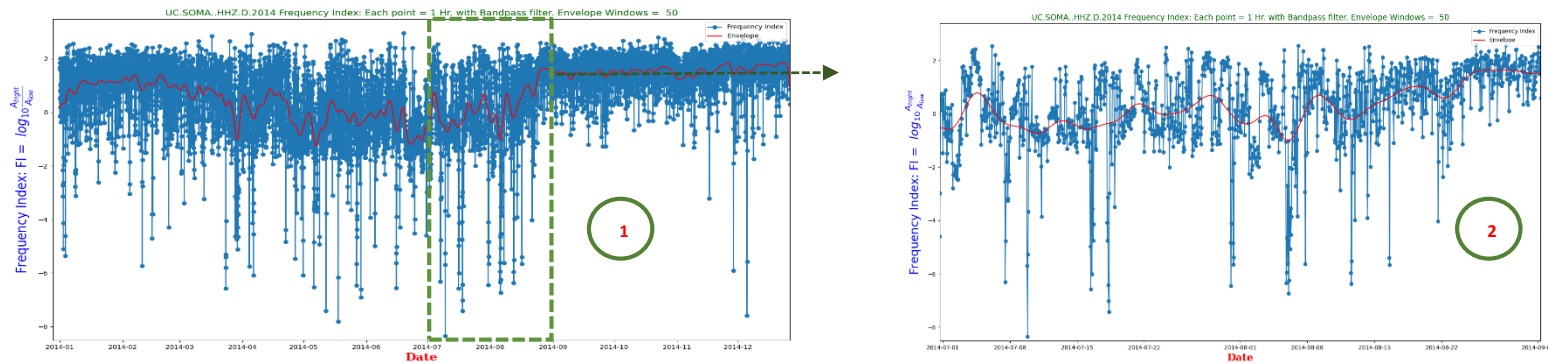


Fig. 52 (1) Graph of the results of Frequency index and its envelope (2) Zoom into the area highlighted in green, covering a time interval from 2014-07 to 2014-09.

g) Left: Graph showing the representation of Kurtosis with its envelope. Right: Zoomed-in view of a specific area (2014-07 to 2014-09).

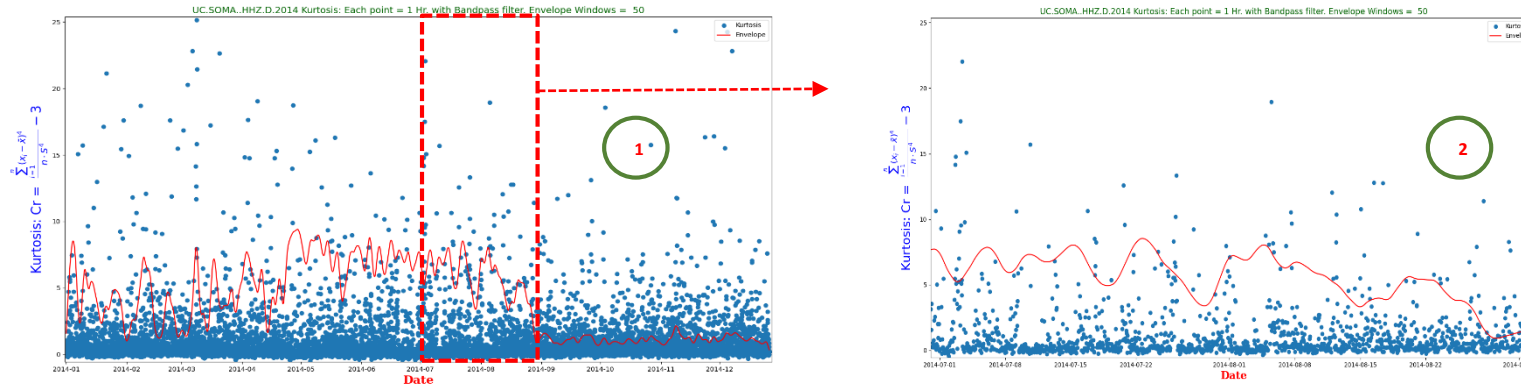


Fig. 53 (1) Graph of the results of Kurtosis and its envelope (2) Zoom into the area highlighted in red, covering a time interval from 2014-07 to 2014-09.

h) Left: Energy envelope representation graph. Right: Zoom in on a specific area (2014-07 to 2014-09).

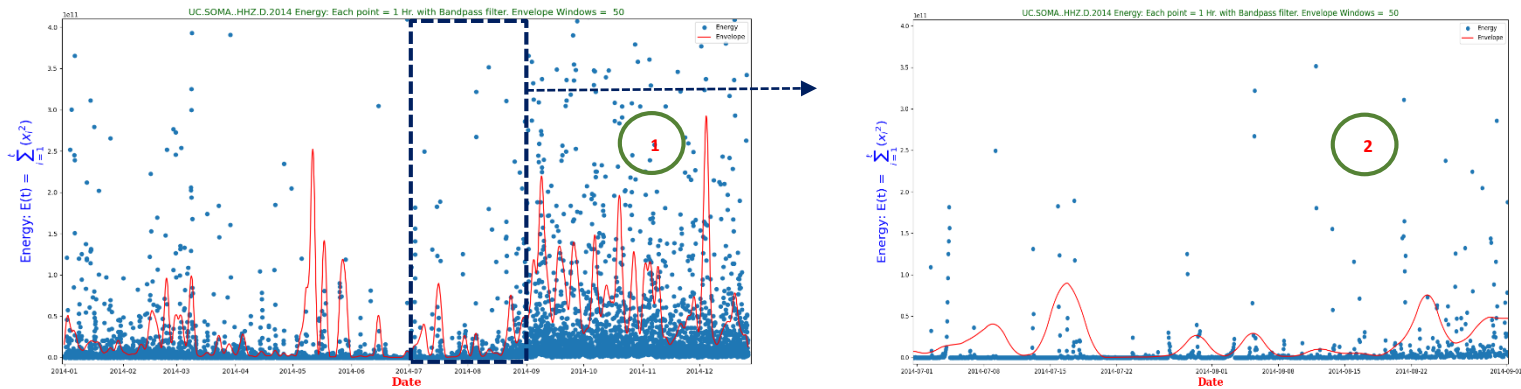


Fig. 54 (1) Graph of the results of the calculation of Energy and its envelope. (2) Zoom of the area dotted in blue, which covers a time interval from 2014-07 to 2014-09



The previous figures (47 to 54) represent the graphical output of an example of Shannon Entropy calculation with one year of records, using one-hour analysis windows. Analyses can be performed using 5 and 10-minute, 1-hour, and 24-hour analysis windows with the four available filters (*Lowpass, Highpass, Bandpass, and Bandstop*). A comparison of this analysis is observed at the end of the document (See Fig. 63 Page 48). Similarly, calculations can be performed using analysis intervals (for example, a one-month duration, See Section 4.1.4 point c), using the same parameters previously indicated (analysis windows and filter types).

#### 4.3.2.- CSV and NPY Result Files Stored in the User-Designated Folder.

The calculation process of the module also provides two result files, obtained through the calculation of Shannon Entropy and stored in the folder designated by the user for this purpose. These files represent:

- a) CSV File (*comma-separated*), which can be opened and viewed in an Excel spreadsheet. The total points for 365 days are 8760 (*calculated in Excel*). An example of this file and its contents is presented in the following table (*The table shows points 1 to 24, corresponding to the month of January*).

|    | day, hour, ShannonEntropy, ShannonAveragedEntropy |
|----|---------------------------------------------------|
| 1  | 1,0,19.242592538535742,0.0053451645940377065      |
| 2  | 1,1,48.599766085210646,0.013499935023669625       |
| 3  | 1,2,17.771415781754314,0.004936504383820642       |
| 4  | 1,3,20.33907819990658,0.005649743944418494        |
| 5  | 1,4,16.388535923103717,0.0045523710897510325      |
| 6  | 1,5,16.048066879367568,0.00445779635537988        |
| 7  | 1,6,35.05629693399813,0.009737860259443924        |
| 8  | 1,7,34.09144537157257,0.009469845936547936        |
| 9  | 1,8,33.796642741378946,0.009387956317049707       |
| 10 | 1,9,30.338870637390666,0.008427464065941852       |
| 11 | 1,10,45.826932390056356,0.012729703441682321      |
| 12 | 1,11,43.05404981588691,0.01195945828219081        |
| 13 | 1,12,49.96734888704295,0.01387981913528971        |
| 14 | 1,13,36.40665227252762,0.010112958964591006       |
| 15 | 1,14,33.88328344223024,0.009412023178397289       |
| 16 | 1,15,21.43065353888248,0.005952959316356245       |
| 17 | 1,16,23.762730167393677,0.006600758379831577      |
| 18 | 1,17,39.28352352662353,0.010912089868506537       |
| 19 | 1,18,23.004567281315932,0.006390157578143314      |
| 20 | 1,19,13.07593141541339,0.0036322031709481637      |
| 21 | 1,20,6.6917577191751105,0.001858821588659753      |
| 22 | 1,21,9.946347158747585,0.002762874210763218       |
| 23 | 1,22,11.2045520534347,0.0031123755703985276       |
| 24 | 1,23,12.432288855412256,0.003453413570947849      |

The column within braces is a value obtained from an Excel formula (=A1+1) and copied throughout the column from the second value to the last of the 365 days. This way, each point from 1 to 8760 is obtained. They correspond to 24 points for each day, one point for each hour.

Table 2. Example of the "CSV" results file obtained through the Shannon Entropy calculation process. The information (*Days, hours, Shannon Entropy value, Normalized Shannon Entropy value*) is separated by commas. The example indicates the values for day one, from hour 0 to 23 (corresponding to points 1 to 24). The total value of the CSV file includes 365 days analyzed. Here, each point corresponds to a one-hour analysis window.

**Important Note:** When calculating Shannon Entropy, the graphs may contain points with very high or negative values (due to reading errors), which will result in a graph with elevated or negative peaks. To avoid this, review which days correspond to those points in the CSV results file and remove them from the database or the folder where the analysis is performed. Then, repeat the process to ensure uniform resulting graphs (See next section 4.3.3).

- b) File "NPY" (NumPy array file containing an array where all information of type and shape is stored to reconstruct the array and graph the signal instantly through a simple program), from which, the calculated Shannon Entropy graph can be reproduced without redoing the entire process.



#### 4.3.3.- Points with very high or negative values in the graphs of Shannon Entropy calculation.

Sometimes, the resulting graph may contain very high or negative values in the calculation of entropy. This could be due to segments with errors in storing data in the sensor. This can be observed in the following figures.

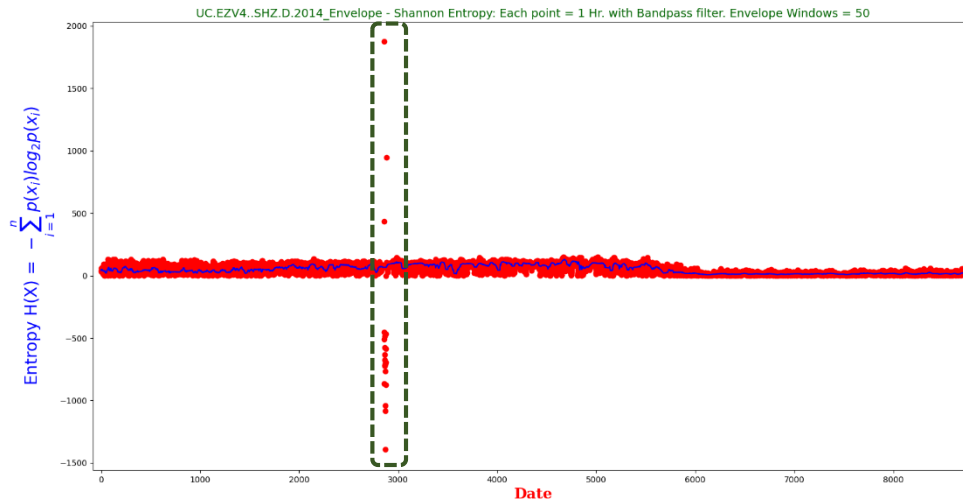


Fig. 55 Graph of Shannon Entropy calculation, showing in the green dotted box, points with values above 500 and negative values.

As shown in the previous figure, several points with values above 500 and also points with negative values can be observed. Zooming in on this image provides a closer look at these values.

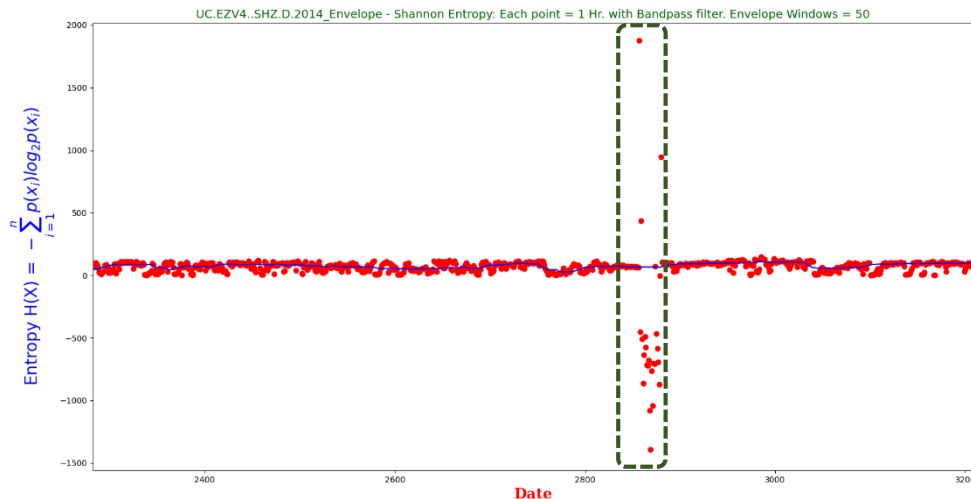


Fig. 56 Zoom in on the Shannon Entropy calculation graph, showing in the green dotted box, points with values above 500, close to 2000, and negative points, close to (-1500).

These points are outside the desired range parameter for entropy. A closer look may reveal the values at which these points are located. It is observed in the following image.

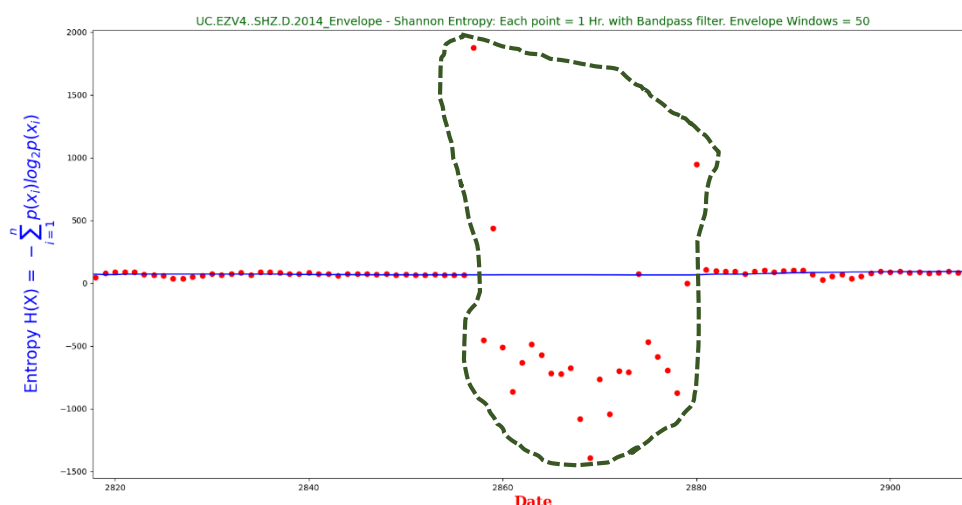


Fig. 57 Graph with a closer zoom to the Shannon Entropy calculation graph. In the area indicated by the green dashed line, points with values above 500, close to 2000, and negative points, close to (-1500), can be observed.

As shown in the previous figure, a closer zoom may indicate or suggest points that introduce a bias and are outside the desired range. Here, it can be inferred that the points are between the values 2850 and 2880. This is confirmed by analyzing the CSV results file and checking the values between these points. This can be seen in the following image.

|      |                                                    |
|------|----------------------------------------------------|
| 2852 | 119,19,66.55582406043753,0.01848772890567709       |
| 2853 | 119,20,70.08353294457125,0.01946764804015868       |
| 2854 | 119,21,63.967564613123585,0.017768767948089886     |
| 2855 | 119,22,65.72862584928532,0.01825795162480148       |
| 2856 | 119,23,65.14403081737916,0.018095564115938656      |
| 2857 | 120,0,1874.6619477449162,0.5207394299291433        |
| 2858 | 120,1,-453.1711860462806,-0.12588088501285571      |
| 2859 | 120,2,436.02623419831644,0.12111839838842123       |
| 2860 | 120,3,-510.2217419413476,-0.14172826165037433      |
| 2861 | 120,4,-865.1776950144628,-0.24032713750401744      |
| 2862 | 120,5,-634.8714717371098,-0.1763531865936416       |
| 2863 | 120,6,-488.01743623985396,-0.135560398955515       |
| 2864 | 120,7,-573.9585015514801,-0.15943291709763338      |
| 2865 | 120,8,-717.9318725269432,-0.1994255201463731       |
| 2866 | 120,9,-721.302278248241,-0.20036174395784473       |
| 2867 | 120,10,-676.8245641498941,-0.18800682337497057     |
| 2868 | 120,11,-1080.9267640832772,-0.300257434467577      |
| 2869 | 120,12,-1393.575078364087,-0.3871041884344686      |
| 2870 | 120,13,-764.8447614939193,-0.21245687819275538     |
| 2871 | 120,14,-1042.4261250681618,-0.28956281251893384    |
| 2872 | 120,15,-701.5312665896545,-0.19486979627490403     |
| 2873 | 120,16,-708.2074213990579,-0.19672428372196055     |
| 2874 | 120,17,74.39185906898203,0.020664405296939452      |
| 2875 | 120,18,-466.6136646062391,-0.12961490683506643     |
| 2876 | 120,19,-584.9367989026749,-0.16248244413963192     |
| 2877 | 120,20,-693.2978096527612,-0.19258272490354478     |
| 2878 | 120,21,-873.3475226641319,-0.24259653407336998     |
| 2879 | 120,22,-1.1961170936268104,-0.00033225474822966956 |
| 2880 | 120,23,946.0782130488107,0.26279950362466964       |
| 2881 | 121,0,106.61222730756795,0.029614507585435542      |
| 2882 | 121,1,100.00054379802862,0.027777928832785726      |
| 2883 | 121,2,91.31743402070649,0.02536595389464069        |

High and negative values to eliminate

Fig. 58 Image of the Excel table segment showing the bias interval in points with high and negative values. Intervals between (1874 | -1393).

As observed in the image, the bias of points with high and negative values is between the values 2857 and 2880. These correspond to day 120 in the Julian day (*non-leap year 2014*), i.e., [April 30](#). Probably, on that day, there was a failure or malfunction in the sensor, leading to incorrect readings that result in very high or negative entropy values in the calculation. To address this issue, two possible solutions can be considered.

- a) The first option is to leave everything as it is and zoom into the area outside the bias, i.e., the space between values less than 200 and zero. This would result in the following graph.

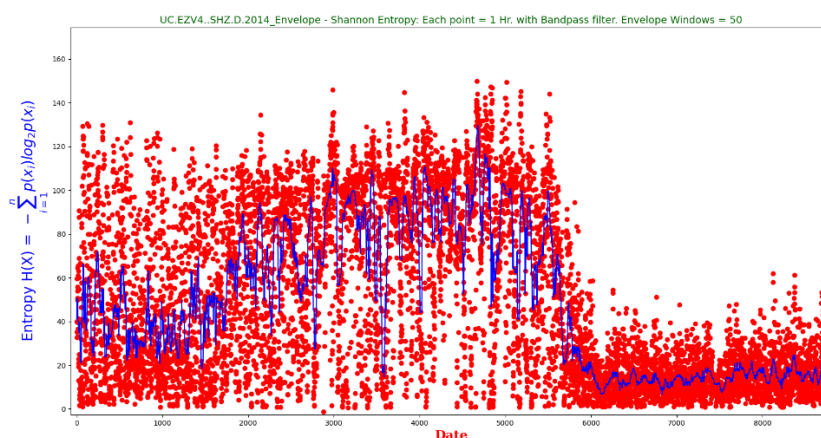


Fig. 59 Image of the Shannon Entropy graph with its envelope, showing the points marked between values less than 200 and zero.

As seen in the above image, the Shannon Entropy graph and its envelope are bounded between average values of 200 to zero. The eruptive period (decay of Shannon entropy) is determined from values 5775 onwards, i.e., from Julian day 241 (non-leap year) according to the Excel table, corresponding to August 29. However, **both higher and negative values still exist in the graphs.** When zooming into the area delimited by values 2857 and 2880 shown in the Excel table, the following image is presented.

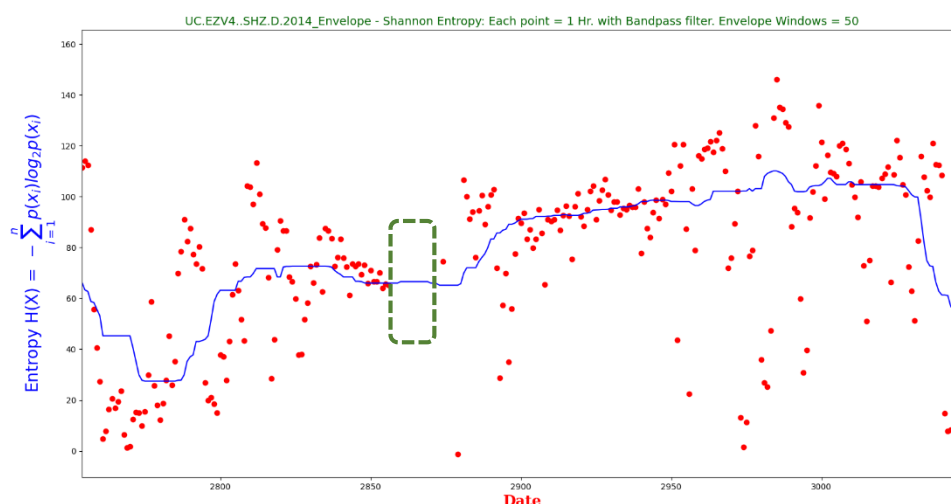


Fig. 60 Graph with a closer zoom to the Shannon Entropy calculation graph with bias. In the area indicated by the green dashed box, there are no associated points; the envelope line follows a straight line because the points have either high or negative values.

- b) The second option is to remove from the database (i.e., from the folder where the data is located) the day with bias corresponding to day 120 and repeat the calculation process. This would yield graphs without bias, i.e., with high and negative values replaced by zeros. The resulting graph is as follows.

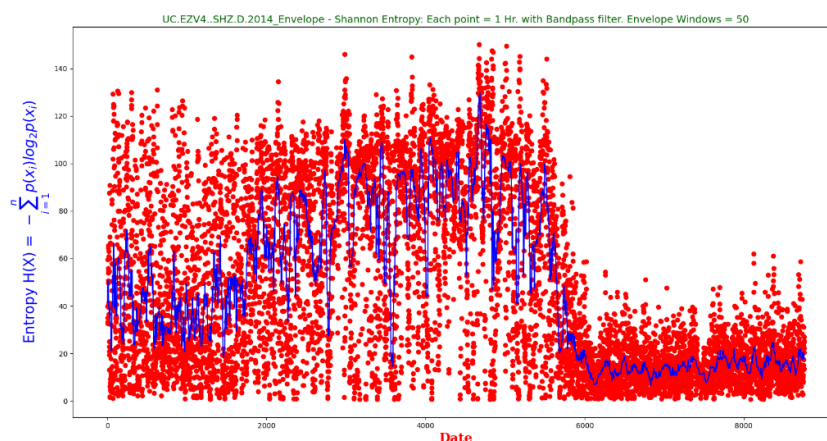


Fig. 61 Image of the Shannon Entropy graph with its envelope after removing day 120, which introduced bias (2857-2880) with high and negative values. A year of records in which one day is not noticeable in the final graph.

Upon observing the result graphs in Figure 61 (*entropy with its envelope, as well as the three other graphs*), it can be seen that the result is more uniform after removing the biased day. By excluding that day, non-existent values are replaced by zeros, resulting in a continuous line in the envelope with an area filled with zero values. Only when zooming into the bias area can the result of removing the biased day be observed (*cf. Figure 62*). Since it's a whole year of records, this interval of zeros is irrelevant in the analysis and conclusions of the final result. The user can also choose to cut and paste that fragment afterward in the overall graph.


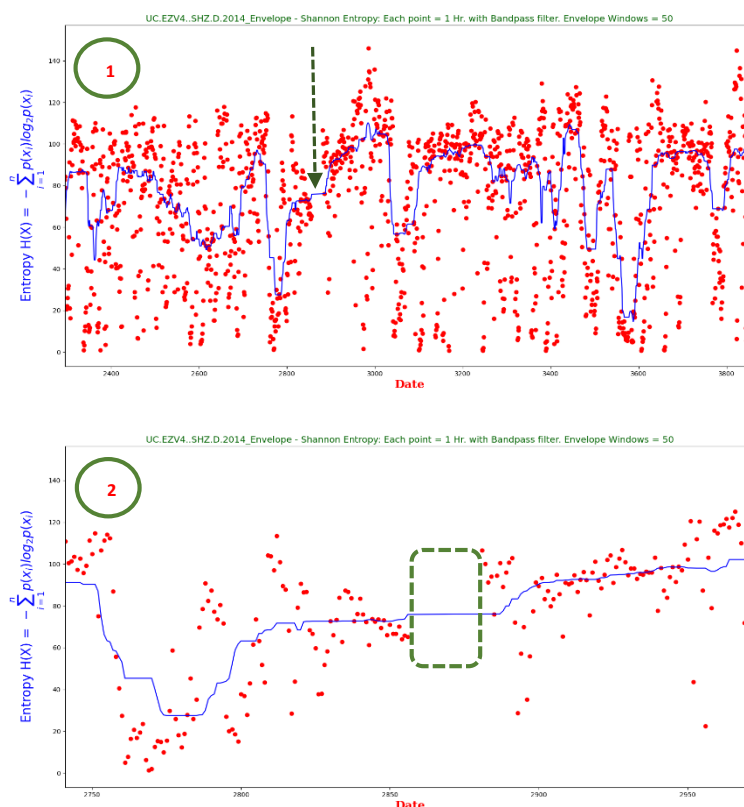



Fig. 62 Image of the Shannon Entropy graph with its envelope after removing day 120, which introduced bias (2857-2880) with high and negative values. At the top (1), the dashed green line indicates the interval removed from day 120 (2857-2880). A closer zoom is observed at the bottom (2), in the green dashed box. The bias area (2857-2880) shows a horizontal line in the envelope (*as the values are = 0*) and a blank space of points. High and negative values disappear from the graph. Peaks are mostly determined by seismic swarms.

Comparison of Shannon Entropy and its envelope using analysis windows (10 min, 1 hr, 24 hrs) with the four available filters.


**A) Analysis Window = 10 min.**

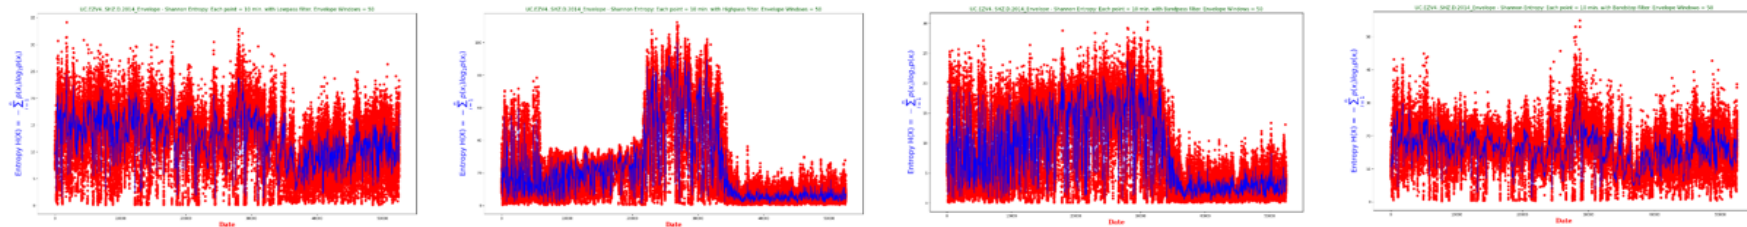

**B) Analysis Window = 1 Hr.**

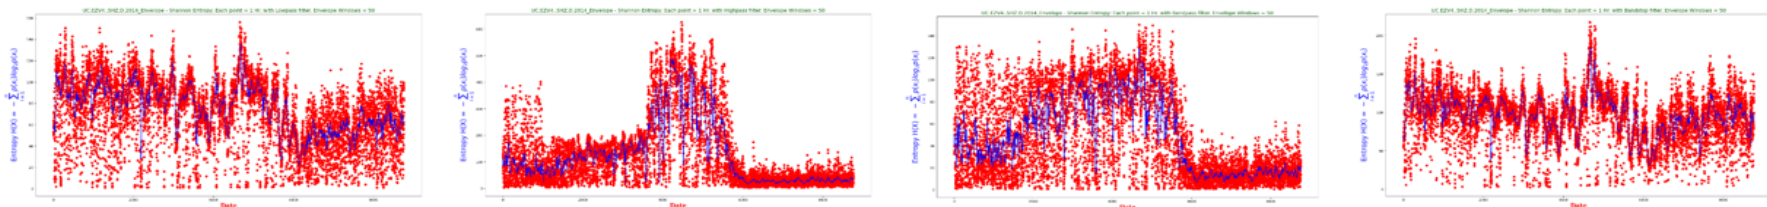

**C) Analysis Window = 24 Hr.**

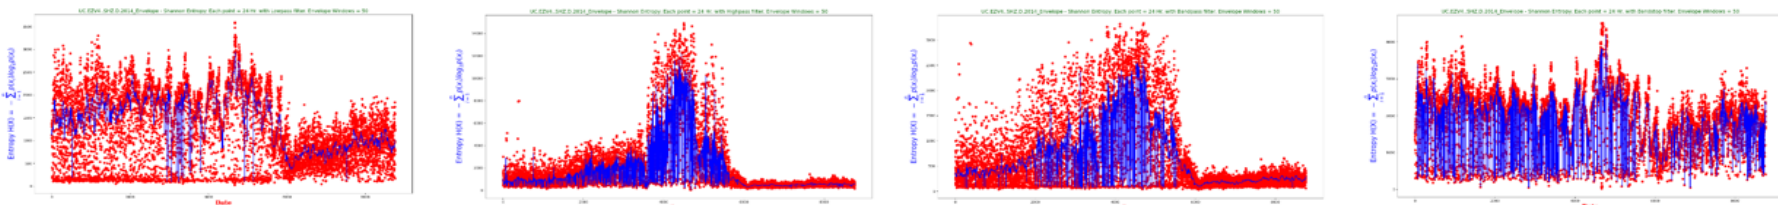

**1) Lowpass Filter = 2 Hz.**

**2) Highpass Filter = 8 Hz.**

**3) Bandpass Filter = 1-15 Hz.**

**4) Bandstop Filter = 1-15 Hz.**

Fig. 63 Comparison example of the Use of Analysis Windows (10 minutes, one hour, 24 hours) with the four types of filters. (Lowpass, Highpass, Bandpass y Bandstop)

## MODULE III

### COMPARISON OF SHANNON ENTROPY ENVELOPES USING VARIOUS FILTER FREQUENCIES.

Performs the read, filtering and plot the entropy envelope with various frequencies - Granada University (Ugr)



**Comparison of entropy envelope using various filter frequencies**  
Selection of loading records and plot files

Directory selection  Records Clear entries  Clear entries Plot Envelope  Plot Entropy



Envelope parameters

Window width  By default = 50

Smoother type (1-3)  By default = 3

NaN Tolerance  By default = 1

 Time interval ☐ Yes/No

Start  Julian days

End  Julian days

Filter Order  By default = 4

Filter type

Please select

Lowpass and Highpass filter

Frequency (Hz)

Filter 1

Filter 2

Filter 3

Filter 4

Filter 5

Bandpass and Bandstop filter

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Directory path to upload records:

Back to menu  Back

 Theoretical and Cosmos Physics Department

Exit System  Exit

Performs the read, filtering and plot the entropy envelope with various frequencies - Granada University (Ugr)



**Comparison of entropy envelope using various filter frequencies**  
Selection of loading records and plot files

Directory selection  Records Clear entries  Clear entries Plot Envelope  Plot Entropy



Envelope parameters

Window width  By default = 50

Smoother type (1-3)  By default = 3

NaN Tolerance  By default = 1

 Time interval ☐ Yes/No

Start  Julian days

End  Julian days

Filter Order  By default = 4

Filter type

Bandpass

Please select

Lowpass

Highpass

Bandpass

Bandstop

Lowpass and Highpass filter

Frequency (Hz)

Filter 1

Filter 2

Filter 3

Filter 4

Filter 5

Bandpass and Bandstop filter

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Frec Min (Hz):

Frec Max (Hz):

Directory path to upload records:

Back to menu  Back

 Theoretical and Cosmos Physics Department

Exit System  Exit



## 5.- Comparison of Shannon Entropy Envelopes Using Various Filter Frequencies.

The module for comparison, calculation, and graphing of Shannon Entropy envelopes using various filter frequencies (*EnvelopeFilter.py*) allows for reading, filtering, calculation, and graphing of different lines of entropy envelopes. The objective of this second module is to read records contained in a folder for up to one year, including the possibility of selecting time intervals and using filters to calculate entropy with various filter frequencies (*Lowpass*, *Highpass*, *Bandpass*, and *Bandstop*), where each point represents the calculated window value. By default, points are visualized for every hour. The purpose of these graphs is to compare the envelope at different frequencies to observe the decay of entropy and select the most suitable filter and frequency for subsequent analyses.

The interface of this module with its main elements is shown in the following image:

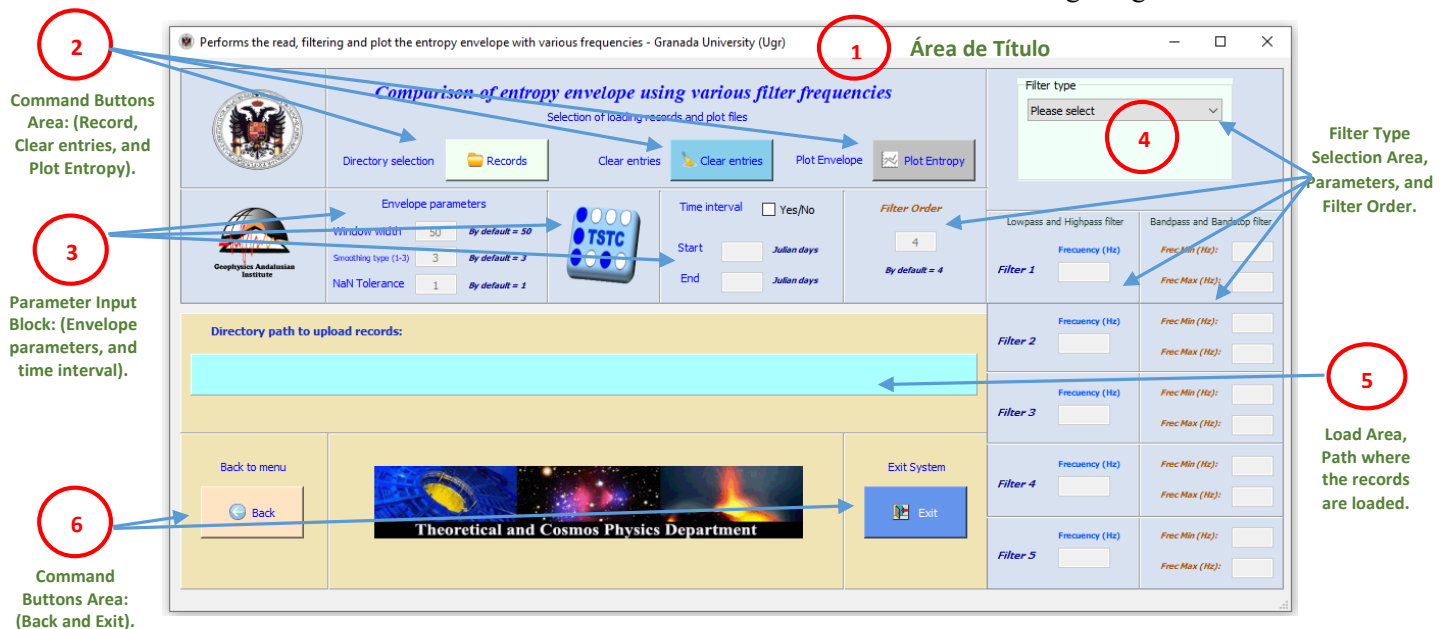


Fig. 64 Interface of the module for comparison, calculation, and plotting of Shannon Entropy envelopes using different filter frequencies and its constituent elements.

As observed in the previous figure, the elements that make up this interface are as follows:

- 1) Title Area.
- 2) Command button area: Record, Clear entries, and Plot Entropy.
- 3) Parameter Input Block: Envelope parameters and time interval.
- 4) Filter Type Selection Area, Parameters, and Filter Order.
- 5) Load Area or Path where the records are located.
- 6) Command button area: Back and Exit.

### 5.1.- Elements of the Entropy Envelope Comparison Module using various filter frequencies.


The elements that make up the main screen are detailed below.



### 5.1.1.- Title area.

1

At the top of the module interface screen, the program's name, icon, and university name are displayed as the title (1).



In addition to the title area, number (1), various elements of the interface are observed and are enumerated from (2-6) in red circles. Each of these elements will be described below and includes the following:

### 5.1.2.- Button Area: (Record, Clear entries, and Plot Entropy).

2

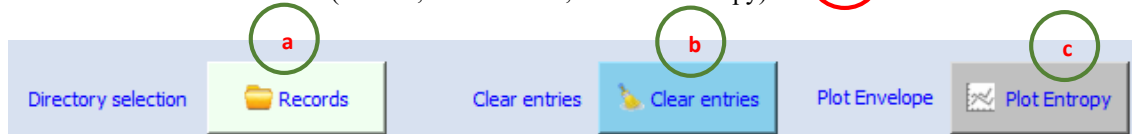


Fig. 65 Button Area: (a) Record, (b) Clear entries, and (c) Plot Entropy.

In the above figure, the functions of the command buttons observed are as follows:

- a) **Record Button:** Loads the physical path "path" of the folder where the records to work with are located. When the mouse pointer is placed over it, it displays the text of the action to be performed "Load Records".



Clicking the button presents a Windows dialog box that allows the user to select the folder containing the records they want to work with. The dialog box is similar to the one shown below:


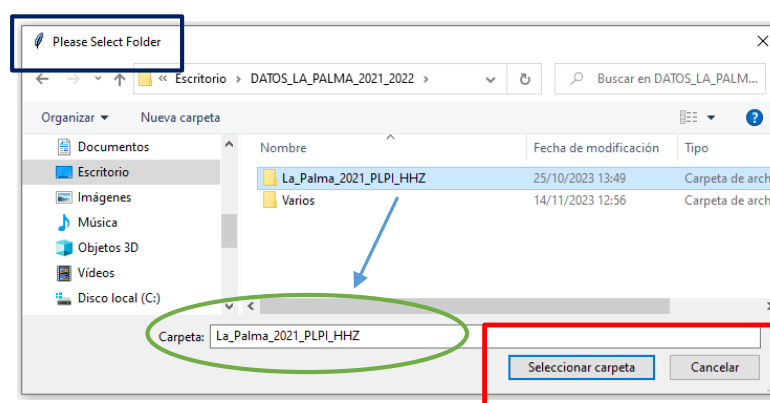


Fig. 66 Dialog box for selecting the folder where the records to work with are located.

As seen in the above image, the user is prompted to select the folder to work with at the top (blue box) "Please Select Folder". At the bottom (red box), there are two action buttons ("Select Folder" and "Cancel") once the folder is selected.

Clicking "[Select Folder](#)" populates the chosen folder's name, indicated by the arrow in blue, in the "[Folder](#)" area ([green ellipse](#)). The path or directory "**Path**" is displayed in the loading section (*Refer to Section 5.1.5*). If the user chooses not to designate a folder, clicking the "[Cancel](#)" button returns to the main interface for selecting a new folder.

- b) "[Clean entries](#)" command button: Clears or erases input elements, closes existing charts, and resets the analysis screen to its initial state, ready for a new search and calculation of Shannon Entropy with seismic events. (*The text presented when hovering over the button is observed*).



Validation is introduced when executing this button to prevent accidental deletion of user-entered parameters. Clicking this button prompts a dialog box asking the user if they truly want to delete the entries they've made. The dialog box looks like the following:

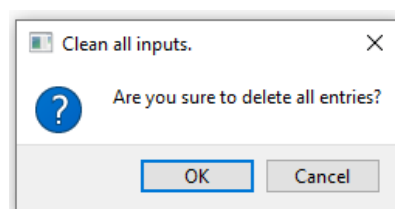


Fig. 67 Dialog box verifying the user's intention to delete entries.

As seen in the figure, if the user indeed wants to delete the entries, they click the "[OK](#)" button, and all entries are removed. The module's interface then presents the initial values with the checkboxes deactivated. If, on the other hand, the user pressed the clean button by mistake and doesn't want to proceed with this action, they click the "[Cancel](#)" command button, and the execution returns to the module's interface screen.

- c) "[Plot Entropy](#)" command button: Clicking this button initiates the calculation and obtains the two graphical results for the comparison of Shannon Entropy envelopes (*in lines and dots*).



**NOTE:** Before clicking, the necessary data entries (*Refer to Section 5.3*) must be introduced, such as the "**Path**" for the directory of records, the filter type with its input parameters (analysis window size and envelope), and whether an interval is to be applied. Clicking the button, if there is any input error, prompts a dialog box indicating it (*Refer to Section 5.2 Validation Messages*). The calculation of Shannon Entropy is then performed, and the two graphical results are presented, comparing the envelopes in lines and dots.

### 5.1.3.- Parameter input block: Values of the Envelope Window (Size, Smoothing, and Null Tolerance), and Time Interval.

The figure shows a software interface with two main sections. The left section, labeled 'a' in a green circle, is titled 'Envelope parameters' and contains three input fields: 'Window width' with a value of 50 (By default = 50), 'Smoothing type (1-3)' with a value of 3 (By default = 3), and 'NaN Tolerance' with a value of 1 (By default = 1). The right section, labeled 'b' in a green circle, is titled 'Time interval' and contains a 'Yes/No' checkbox, and two input fields for 'Start' and 'End' dates in Julian days.

Fig. 68 Parameter input block: (a) Envelope Parameters (Analysis Window Size, Smoothing, and NaN Tolerance), (b) Time Interval

In the previous figure, marked with green circles, two sections comprise this area:

a) Envelope Parameter Selection.

This is a close-up of the 'Envelope parameters' section from Figure 68. It shows three input fields: 'Window width' set to 50 (By default = 50), 'Smoothing type (1-3)' set to 3 (By default = 3), and 'NaN Tolerance' set to 1 (By default = 1).

In this box, you enter the envelope parameter values, indicated in three entries:

- i) Window size (default is set to 50),
- ii) Smoothing type (default is set to 3),
- iii) NaN null value tolerance (default is set to 1).

**NOTE:** The user can leave the default number when selecting the data folder to work with, even if the number of records is lower. This merely indicates the maximum number of data points to be considered. If the user wishes to work with a smaller number, for example, a month, the easiest and most viable option is to use the time interval (c) and indicate it there, leaving this value as the default to represent the maximum size for analysis.

b) Selection of the time interval.

This figure shows two states of the 'Time interval' section. The left state, labeled '1' in a green circle, shows the 'Yes/No' checkbox unchecked. The right state, labeled '2' in a green circle, shows the 'Yes/No' checkbox checked, which activates the 'Start' and 'End' input fields. In the right state, 'Start' is set to 274 and 'End' is set to 304, both labeled 'Julian days'.

Fig. 69 User's indication whether a time interval will be used to analyze the data (1) Initial position, empty value in the "Yes/No" box, indicating "NO". (2) Check the "Yes/No" box, indicating "YES", which activates the text boxes "Start" and "End" when selecting the filter, to enter the dates in Julian days (274 to 304), corresponding to analyzing the month of October in a non-leap year.

In the previous box, it is observed that part (1) has the initial default values. That is, it is not selected to use the time interval, and the text boxes indicating the date entries in Julian days are deactivated. In part (2), the "Yes/No" box has been selected or checked, indicating the desire to use the time interval. To do this, the user needs to select the filter type, which activates the start (*Start*) and end (*End*) date text boxes, expressed in Julian days. In the example shown in the figure, the start and end dates have been entered as values (274-304) respectively, indicating the analysis of records for the month of October in a non-leap year (2015, 2017, 2019, 2021, 2023, etc.). Data entry in these boxes is validated to accept only integers, positioned in the center of the box.

#### 5.1.4.- Filter Type Selection Area, Parameter Entry, and Filter Order.

Fig. 70 Filter Selection Area: (a) Filter type selection, (b) Filter type parameters, (c) Filter order.

The comparison of entropy envelopes is performed by selecting five different parameter sets. That is, five frequency intervals of a specific filter type are chosen. Hence, there are five parameter entry boxes in the image. In the figure above, marked with green circles, three sections comprise this area:

##### a) Filter Type Selection Area.

In the above image, the left part initially instructs the user to perform or select the type of filter they want to use. By clicking on this dropdown (*ComboBox*), the available filter options are presented, which are: (*Lowpass*<sup>10</sup>), (*Highpass*<sup>11</sup>), (*Bandpass*<sup>12</sup>) and (*Bandstop*<sup>13</sup>)

<sup>10</sup> **Lowpass Filter:** The lowpass filter blocks high-frequency signals and allows low-frequency signals to pass through (*frequencies lower than the cutoff frequency*).

<sup>11</sup> **Highpass Filter:** The highpass filter blocks low-frequency signals and allows high-frequency signals to pass through (*frequencies higher than the cutoff frequency*).

<sup>12</sup> **Bandpass Filter:** The bandpass filter allows spectral content only in the vicinity of the central frequency. This window is created through a minimum frequency value and a maximum frequency value. It eliminates noise associated with low and high frequencies generated and/or residual.

<sup>13</sup> **Bandstop Filter:** The bandstop filter does not allow the passage of signals whose frequencies are between the upper and lower cutoff frequencies. In other words, it eliminates frequencies or stops a particular frequency band.

**NOTE:** By default, the command button for the calculation and presentation of Shannon entropy results (*Plot Entropy*) is disabled. This button is activated once the user has selected the filter type.

- b) Area for selecting and entering filter parameters.

Fig. 71 Filter Parameter Selection Area: (1) Frequency parameter (Hz) [Lowpass and Highpass filters], (2) Minimum and maximum frequency parameters (Hz) [Bandpass and Bandstop filters].

- 1) Frequency Parameter (Hz): These five boxes are activated when selecting filter types; *Lowpass* and *Highpass*. In this selection, the minimum and maximum frequency boxes remain deactivated. Entries in this box are validated to allow decimal numbers.
- 2) Minimum and Maximum Frequency Parameters (Hz): These five sets of two text boxes are activated when selecting filter types; *Bandpass* and *Bandstop*. In this selection, the Frequency (Hz) input boxes are deactivated. Entries in these five sets of boxes are validated to allow decimal numbers.

**NOTE:** In the image above, all data entry boxes that are initially observed are deactivated by default. They are also validated to only allow numerical inputs and not alphabetical characters or letters. The values to be entered will be centered in the text boxes.

- c) Filter Order Parameter: By default, this parameter is set to a value of four (4) initially. This input box is activated when selecting any of the four available filter types. It allows the user to enter a different filter order value (2, 6, 8, etc.). Entry in this box is validated to accept only integers.

### 5.1.5.- Loading area or path, of the directory and records to be used.

5

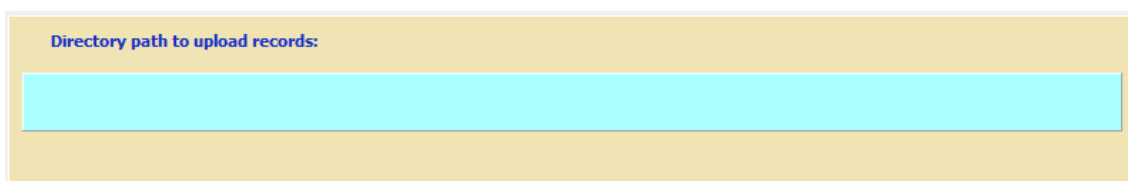


Fig. 72 Loading area or path, of the directory and records to be used.

In this previous image, the area is shown where the directory or folder path will be displayed, in which the actions of the command button: "[Records](#)" will be carried out, as described in section 5.1.2.

**NOTE:** It is important that this area is already defined before proceeding to click or execute the "[Plot Entropy](#)" command button (See section 5.1.2), which will perform the calculation, comparison, and printing of results of the five Shannon Entropy envelopes, according to the data indicated in the working directory or folder and the parameters of the selected filters. Otherwise, validation dialog boxes for data entry will be presented (See section 5.2).

### 5.1.6.- Command button area: (*Back and Exit*).



Fig. 73 Command Button Area: (a) Back and (b) Exit.

- a) "[Back](#)" command button: Allows you to return to the initial presentation screen of the system ([Main Menu](#)). When placing the mouse pointer, it displays a message indicating its function.



- b) "[Exit](#)" command button: Allows the complete exit from the module and system (*After presenting the screen that asks if you want to leave the module and system*). When placing the mouse pointer, it displays a message indicating its function.



As in the start screen, if the "Exit" button is pressed or clicked, a window appears asking the user if they are sure they want to leave the module and system. This window is the following.

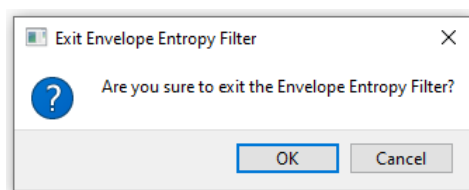



Fig. 74 Text box indicating whether you want to exit the module and system.

Clicking "OK" closes the screen and completes the module and system exit. Clicking "Cancel" continues to the main screen of the Shannon Entropy envelope calculation and comparison module.


## 5.2.- Error Validation for Directory or Input Entries.

If you attempt to calculate and graph the comparison of Shannon Entropy envelopes by clicking the "Plot Entropy" button without entering data in any of the input parameter boxes or text fields, a validation prompt will appear, indicating that this action must be performed. These validation prompts allow the program execution to proceed without severe system interruption due to missing data. The validations for empty or incorrect entries are as follows:

- a) Validation for data entry - Records directory empty.




- b) Validation for data entry - Envelope Parameters.

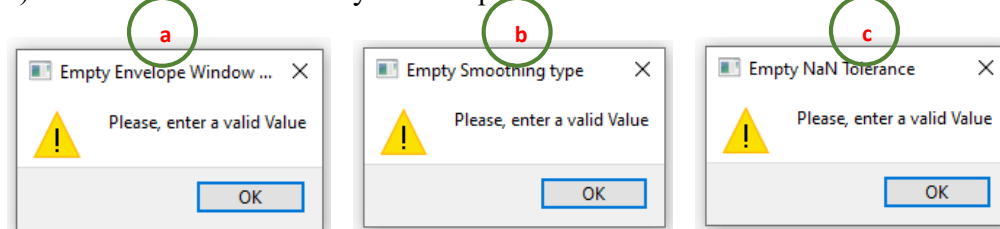


- (a) Empty Envelope Size value. (b) Empty Smoothing value. (c) Empty NaN Tolerance value.

- c) Validation for data entry - Start Time Interval empty.







- d) Validation for data entry - End Time Interval empty.




- e) Validation for data entry - Filter order empty.




- f) Error Validation for Data Entry – Empty Frequency Value (*Lowpass or Highpass*) Filter 1.




- g) Error Validation for Data Entry – Empty Frequency Value (*Lowpass or Highpass*) Filter 2.




- h) Error Validation for Data Entry – Empty Frequency Value (*Lowpass or Highpass*) Filter 3.




- i) Error Validation for Data Entry – Empty Frequency Value (*Lowpass or Highpass*) Filter 4.




- j) Error Validation for Data Entry – Empty Frequency Value (*Lowpass or Highpass*) Filter 5.




- k) Error Validation for Data Entry – Empty Minimum Frequency Value (Bandpass or Bandstop) Filter 1.




- l) Error Validation for Data Entry – Empty Maximum Frequency Value (Bandpass or Bandstop) Filter 1.




- m) Error Validation for Data Entry – Empty Minimum Frequency Value (Bandpass or Bandstop) Filter 2.




- n) Error Validation for Data Entry – Empty Maximum Frequency Value (Bandpass or Bandstop) Filter 2.




- o) Error Validation for Data Entry – Empty Minimum Frequency Value (Bandpass or Bandstop) Filter 3.




- p) Error Validation for Data Entry – Empty Maximum Frequency Value (Bandpass or Bandstop) Filter 3.




- q) Error Validation for Data Entry – Empty Minimum Frequency Value (*Bandpass or Bandstop*) Filter 4.




- r) Error Validation for Data Entry – Empty Maximum Frequency Value (*Bandpass or Bandstop*) Filter 4.




- s) Error Validation for Data Entry – Empty Minimum Frequency Value (*Bandpass or Bandstop*) Filter 5.



- t) Error Validation for Data Entry – Empty Maximum Frequency Value (*Bandpass or Bandstop*) Filter 5.



- u) Validation in case of encountering a different input error than the ones mentioned earlier, such as a non-existent or invalid file.

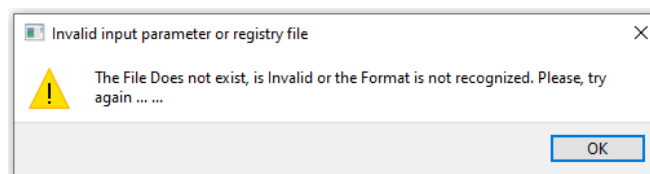

The message in the above figure indicates an input error (*different from the previous ones*) because the format is not recognized, it is invalid, or the record does not exist. Additionally, the parameters or inputs may be outside the allowed range according to the signal to be analyzed. By clicking the "OK" button, you return to the system to choose a valid file or correct the erroneous inputs. This way, the program's execution continues without issues.

### 5.3.- Execution process and results of the Shannon Entropy Envelopes Comparison Module using various filter frequencies.

The process for loading, filtering, and graphing the comparison of envelopes based on filter values is straightforward, consisting of the following steps (*It is recommended to follow these steps*):

- Select the directory where the records are located by clicking the "**Records**" command button. By default, the initial path is set to the root directory "C" of the PC, whether on the Windows or Linux system. Once selected, click the "**Open**" command button, and the file path is displayed in the area: (*Directory path to upload records - See 5.1.5*).
- Select the filter type (*Lowpass, Highpass, Bandpass, or Bandstop*). This will activate the parameter entry boxes based on the indicated selection.
- Select and enter the Envelope parameters or leave the default values = (50,3,1).
- (**OPTIONAL**) Select or check the box (*if required*) to analyze a specific time interval. If affirmative, indicate in the "**Start**" box the start time in Julian days and in the "**End**" box the end time in Julian days.
- Enter the filter parameter values according to the selected type. For lowpass and highpass filters, enter a valid "*frequency*" value for the five proposed values (*Filter 1 to Filter 5*). For bandpass and bandstop filters, enter valid "*minimum frequency*" and "*maximum frequency*" values for the five proposed values (*Filter 1 to Filter 5*).
- Enter (*if required*) the filter order or leave the default value = 4.
- Finally, click the "Plot Entropy" button to calculate Shannon Entropy, and present the two graphs comparing the envelopes (*in lines and dots*).

Once the above is done, click the "**Plot record**" command button. The output of this process will consist of two graphs (*1.- Comparison of Shannon Entropy Envelopes using line plots for the five filter parameters, 2.- Comparison of Shannon Entropy Envelopes using dot plots for the five filter parameters*). When the graphs are displayed, you can zoom in (*using the "Magnifying Glass" tool number 5 - See Section 6*) at any part of them to observe the entropy's progression over time in much greater detail.

### 5.3.1.- Example of the Shannon Entropy Envelopes calculation and comparison procedure using various filter frequencies.

As an example, the following process is presented in the interface with the output elements for an analysis of the comparison of Shannon Entropy envelopes using various filter frequencies.

The screenshot shows the software interface titled "Performs the read, filtering and plot the entropy envelope with various frequencies - Granada University (Ugr)". The interface is divided into several sections:

- Top Section:** Contains the title "Comparison of entropy envelope using various filter frequencies" and a subtitle "Selection of loading records and plot files". It includes buttons for "Directory selection", "Records", "Clear entries", "Plot Envelope", and "Plot Entropy".
- Envelope parameters:** Includes fields for "Window width" (50, By default = 50), "Smoothing type (1-3)" (3, By default = 3), and "NaN Tolerance" (1, By default = 1).
- Time interval:** Includes a "Time interval" checkbox (Yes/No) and fields for "Start" and "End" in Julian days.
- Filter type:** A dropdown menu showing "Bandpass" selected, with options for "Lowpass", "Highpass", "Bandpass", and "Bandstop".
- Filter parameters:** A table with 5 filters, each with a "Frequency (Hz)" field and "Freq Min (Hz)" and "Freq Max (Hz)" fields. The values are:
 

| Filter   | Frequency (Hz) | Freq Min (Hz) | Freq Max (Hz) |
|----------|----------------|---------------|---------------|
| Filter 1 |                | 1             | 2             |
| Filter 2 |                | 2             | 4             |
| Filter 3 |                | 4             | 8             |
| Filter 4 |                | 8             | 16            |
| Filter 5 |                | 16            | 24            |
- Bottom Section:** Includes a "Directory path to upload records:" field with the path "C:/Users/Usuario/Desktop/Datos\_Colima\_SOMA\_2014/". It also has buttons for "Back to menu", "Back", "Exit System", and "Exit".

Fig. 75 Interface of the module with the module's input for the calculation and comparison of Shannon Entropy envelopes using various filter frequencies.

In the above figure, the values obtained when loading records for a one-year duration are observed (*The time interval field is not used*). The input parameters used are:

- a) Select and enter the Envelope parameters (*Envelope size, Smoothing and NaN Tolerance*) or leave the default values = (50,3,1).
- b) Filter Type: In this case = *Bandpass*.
- c) Enter the 5 sets of input parameters for the Bandpass Filter.
  - a. Filter 1: Minimum Frequency = 1, Maximum Frequency = 2.
  - b. Filter 2: Minimum Frequency = 2, Maximum Frequency = 4.
  - c. Filter 3: Minimum Frequency = 4, Maximum Frequency = 8.
  - d. Filter 4: Minimum Frequency = 8, Maximum Frequency = 16.
  - e. Filter 5: Minimum Frequency = 16, Maximum Frequency = 24.
- d) Filter order. (*If required*), otherwise leave the default value = 4.

As observed, the user only had to specify the folder where the data is located, the filter type, and its parameters. The remaining input values are presented by default. Subsequently, click the "*Plot Entropy*" command button, proceed to the calculation, and present the results. The two result graphs (*lines and dots with their zoom-ins*) obtained from this procedure are as follows:

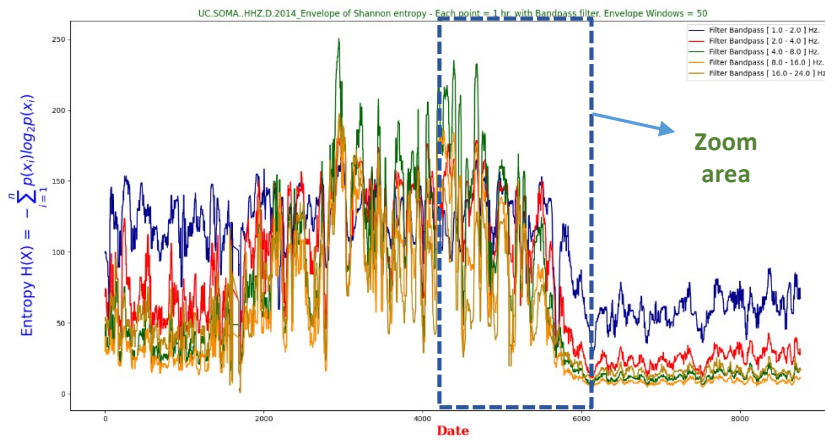


Fig. 76 Graph (lines) comparing envelopes using the 5 sets of bandpass filter values.

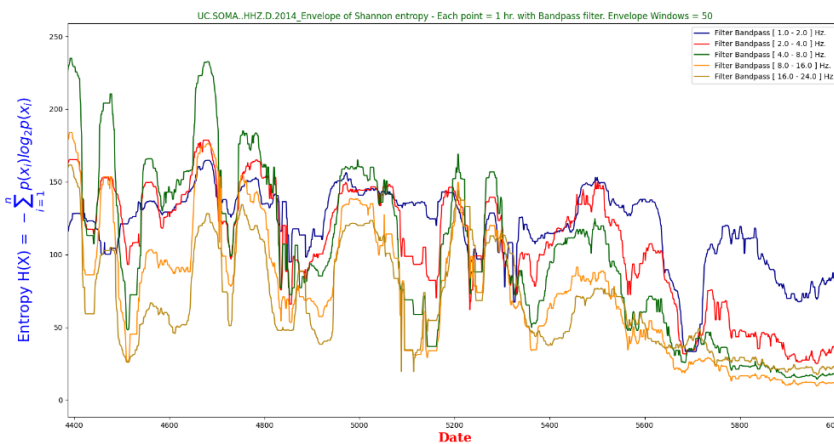


Fig. 77 Zoomed-in view (*interval 4400-6000 in the dotted blue box, figure 70*), Graph (lines) comparing envelopes using the 5 sets of bandpass filter values.

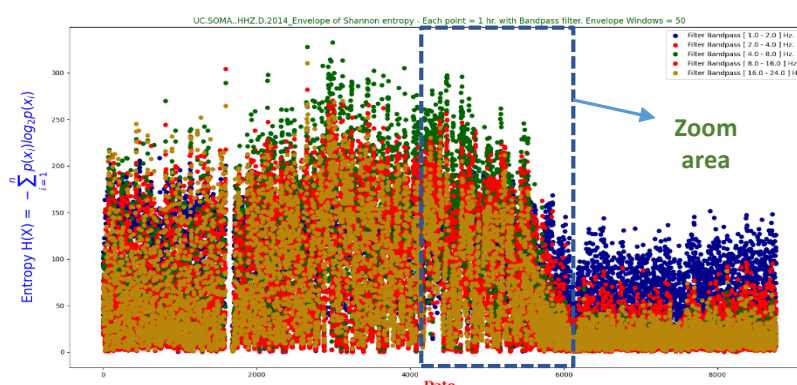


Fig. 78 Graph (dots) comparing envelopes using the 5 sets of bandpass filter values.

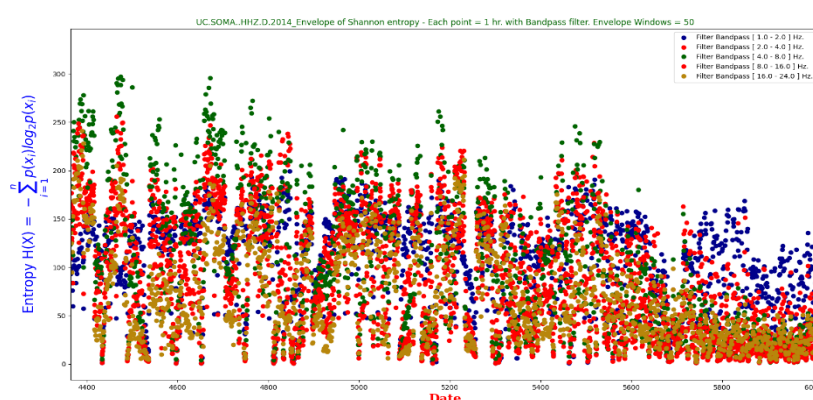


Fig. 79 Zoomed-in view (interval 4400-6000 in the dotted blue box, figure 78), Graph (dots) comparing envelopes using the 5 sets of bandpass filter values.

### 5.3.2.- Example Procedure for Calculating and Comparing Shannon Entropy Envelopes Using Various Filter Frequencies, Taking a Time Interval as Parameters.

The previous graphs correspond to records spanning one year (2014). Each graph provides a close-up of a specific area (dotted blue box). The following images illustrate taking a time interval as a parameter.



Fig. 80 Interface of the module's input for the calculation and comparison of Shannon entropy envelopes using various filter frequencies and a time interval from Julian day 274 to 304, corresponding to the month of October (non-leap year).

In the example shown in the module interface in the previous figure, the start and end dates are set to values **274-304**, meaning that the analysis will focus on records from the month of **October** in a non-leap year (2014, 2015, 2017, 2019, 2021, 2023, etc.). Data entry in these boxes is validated to accept only integers, positioned in the center of the box.

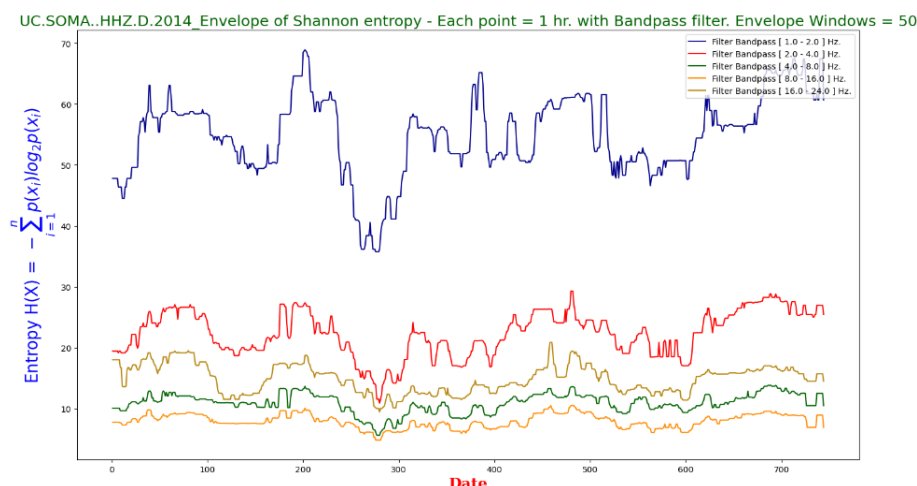


Fig. 81 Graph (lines) comparing envelopes using the 5 sets of bandpass filter values, using a time interval (Julian days 274-304), equivalent to October 2014.

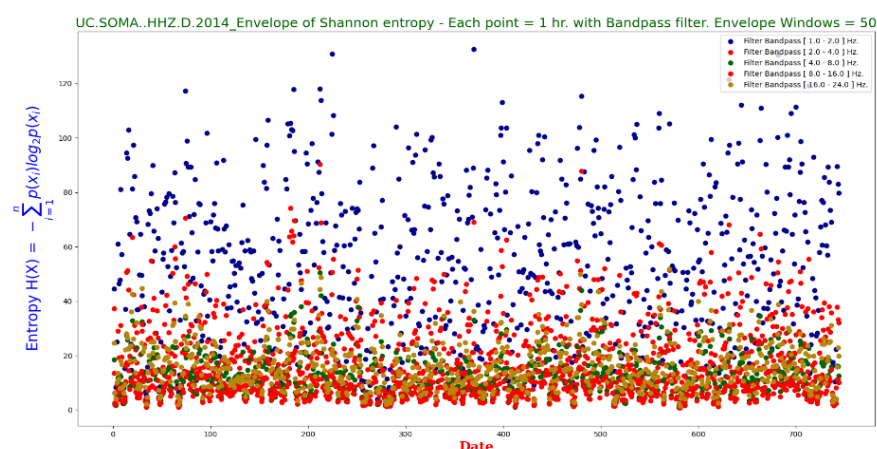


Fig. 82 Graph (dots) comparing envelopes using the 5 sets of bandpass filter values, using a time interval (Julian days 274-304), equivalent to October 2014.

As observed in both the images comparing envelopes for the entire year (Figs. 76-79) and those for the time interval (Figs. 81-82) with a bandpass filter, the two frequency ranges that approach zero for Shannon Entropy analysis would be the filters at frequencies (4-8 Hz and 8-16 Hz). However, this cannot be a general constant because variations may occur depending on the volcano and the type of eruption it exhibits.

For example, in the following section, a comparison is presented between the analysis of envelopes from an explosive eruption and an effusive eruption using two different volcanoes located in diverse geographical areas.



### 5.3.3.- Example Procedure for Calculating and Comparing Shannon Entropy Envelopes Using Various Filter Frequencies, Taking Two Types of Volcanoes and Eruptions as Reference.

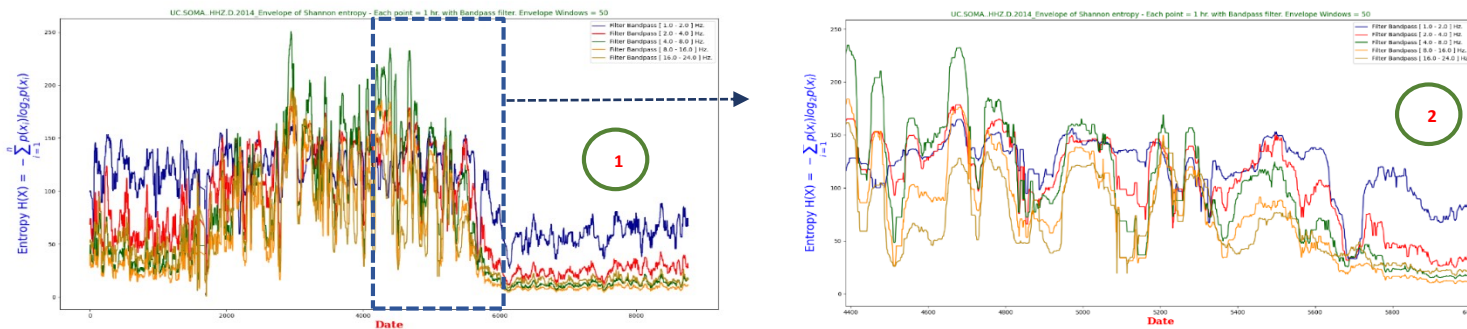


Fig. 83 Volcano and explosive eruption type. (1) Graph (lines) comparing envelopes using the 5 sets of bandpass filter values. (2) Zoomed-in view (interval 4400-6000 in the dotted blue box), Graph (lines) comparing envelopes using the 5 sets of bandpass filter values.

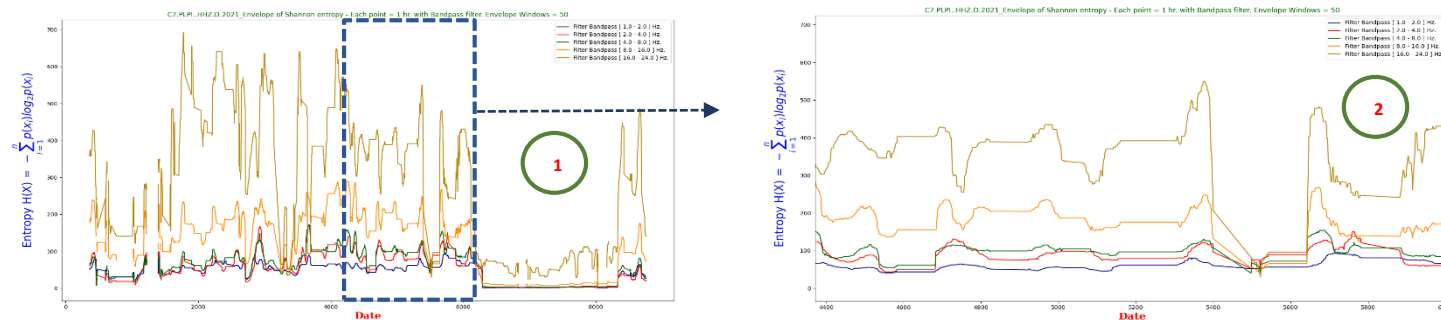


Fig. 84 Volcano and effusive eruption type. (1) Graph (lines) comparing envelopes using the 5 sets of bandpass filter values. (2) Zoomed-in view (interval 4400-6000 in the dotted blue box), Graph (lines) comparing envelopes using the 5 sets of bandpass filter values.

As observed in the previous figures, the upper graph (Fig. 81) for the explosive eruption indicates that the envelopes for one year show a better analysis of Shannon Entropy (*trending towards zero*) in the frequency filters (4-8 Hz and 8-16 Hz). However, the lower graph (Fig. 82) for the effusive eruption indicates that the envelopes for one year show a better analysis of Shannon Entropy (*trending towards zero*) in the frequency filters (1-2 Hz and 2-4 Hz). Similarly, the filter from 16 to 24 Hz performs better in the explosive eruption than in the effusive one.

It can be concluded from the above results that for each type of eruption and volcano, the user should analyze and decide which type of filter and frequencies are most suitable for that particular case. Proceeding in this way, with the Shannon Entropy calculation and its envelope, using the most appropriate parameters. To reinforce this, we will observe the graphs when taking a time interval. Thus, as in the previous figures, the values (274-304) will be analyzed, meaning that records from the month of October in a non-leap year (2014, 2015, 2017, 2019, 2021, 2023, etc.) will be analyzed. The images are as follows.

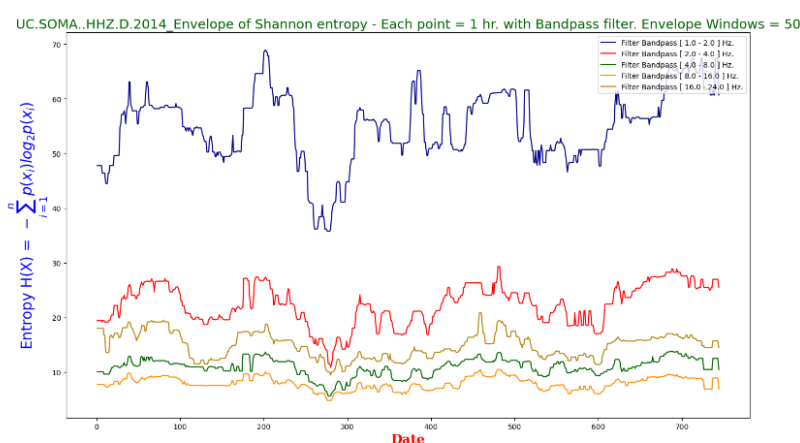


Fig. 85 Volcano and explosive eruption type. Graph (lines) comparing envelopes using the 5 sets of bandpass filter values, using a time interval (Julian days 274-304), equivalent to October 2014.


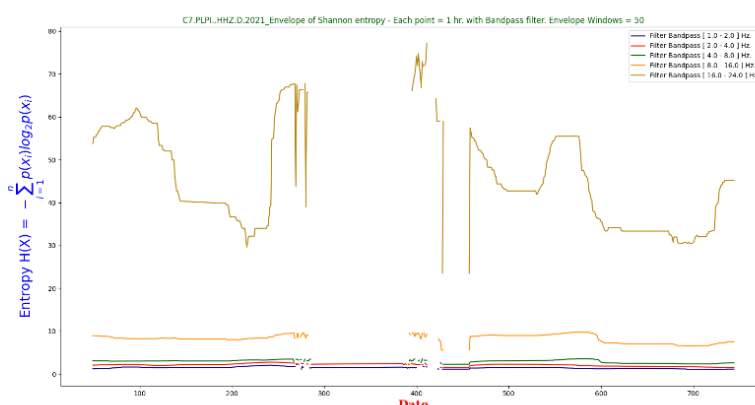


Fig. 86 Volcano and effusive eruption type. Graph (lines) comparing envelopes using the 5 sets of bandpass filter values, using a time interval (Julian days 274-304), equivalent to October 2021.

As in Figures 83 and 84, it can be observed that the most suitable filters [*in this case, bandpass (Bandpass)*] for calculating Shannon Entropy to establish a trend towards zero in both eruptions are: (a) For the explosive eruption, it is (4-8 Hz and 8-16 Hz), and for the effusive eruption, it is (1-2 Hz and 2-4 Hz).

## 6.- Toolbar of Graphs (Matplotlib Library)

In the construction of graphs, the *Matplotlib* library's graph screen has a set of very useful tools that allow you to visualize, edit, and save graphs in various formats. At the top of the Matplotlib graph screen that appears when a graph is created, there is a toolbar similar to the following:

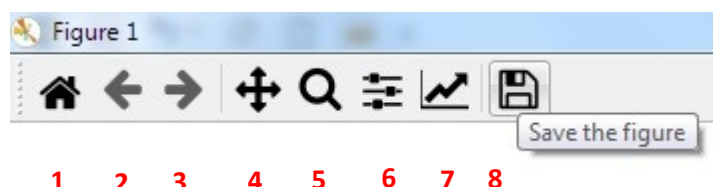

From left to right, the icons representing the actions to be performed are:


1. [Reset original view](#): Restores all graphs to the initial state.
2. [Back to previous view](#): Preview of the selected graph.
3. [Forward to next view](#): Forward view of the next image.
4. [Left button pans, Right button zooms, x/y fixes axis, CTRL fixes aspect](#). Moves the graph and axes left or right, zooms in or out, fixes the x/y axis, and fixes the aspect with CTRL.
5. [Zoom to rectangle](#): Through a rectangle, zooms in on the selected graph.
6. [Configure subplots](#): Configuration of subplots (Borders and spacings).
7. [Edit axis, curve and image parameters](#): Editing the parameters of the graph. Select the axes or graph and edit elements such as title, coordinates (X, Y), and curve parameters (lines, markers) in styles, colors, and size.
8. [Save the figure](#): Saves the graph in several formats.

This document does not delve into each of them; it only highlights the use of those that are generally more commonly used, such as (1, 2, 5, 7, and 8).

In the above graphs, the use of the zoom tool (5) has been observed. Tools 2 and 3 allow zooming in or out individually for each graph. Option 1 allows restoring all elements or subplots of the graph to their initial values (*each individual graph or part of the window*). As for option 8, it allows saving the graph in various formats. The rest are straightforward, and it is up to the user to explore each of them. Now, the processes for "**editing**" and "**saving or storing**" the graphs (*Numbers 7 and 8*) are detailed below.

### 6.1.- Saving Graphs.

*The process of saving graphs is very simple. Click on the icon of tool number 8 (Save the figure).*



This opens an explorer window, similar to those in Windows (depending on the language or system used), where you can select the folder or directory where the graph will be saved.

Additionally, provide a name and select the desired format type. This can be done at the bottom of the explorer window (red circle in the image), where various format types available for saving are selected. The screen resembles the following.

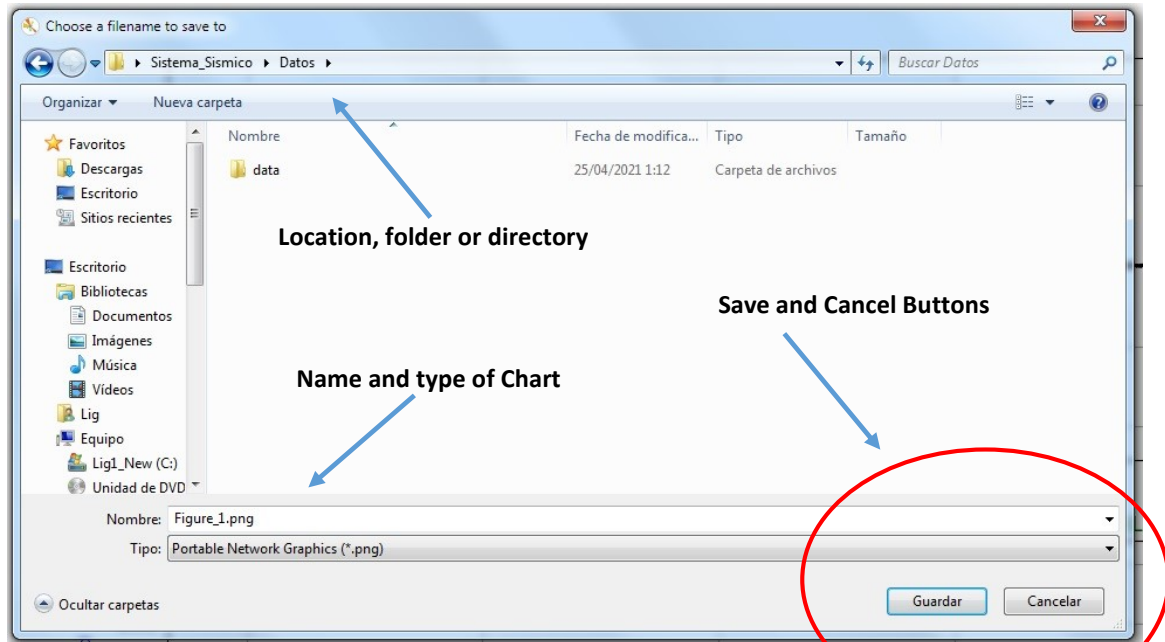


Fig. 87 Screen that allows you to save the graph, selecting a name and choosing various format types. "Save" and "Cancel" buttons are provided to complete or cancel the process.

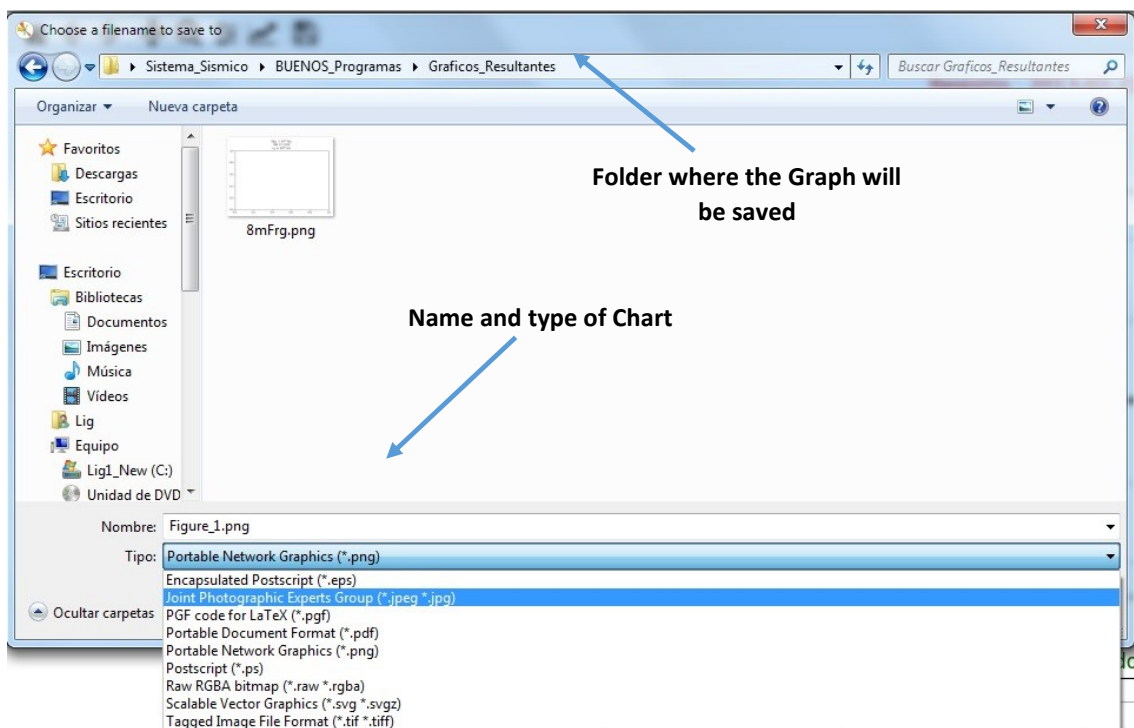


Fig. 88 Screen where you can see the types of formats available to save the graph.

The previous figure shows a list of the available file formats, the following image presents this list in more detail:


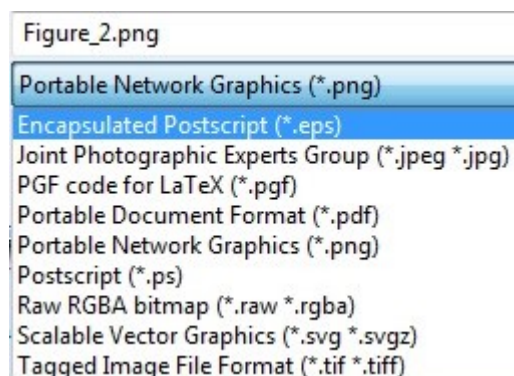


Fig. 89 List of available formats for saving the graph generated by the analysis.

Once you have selected both the name and the desired file format, and the location of the folder or directory where the graph will be saved, click the ["Save"](#) button (*See Fig. 87*), and the graph will be stored and available for further use as needed.

## 6.2.- Editing Axes and Images in Graphs

Through the "Edit" button, point 7 (*See page 67*) of the graph toolbar ([Edit axis, curve and image parameters](#)), it is possible to edit or modify the parameters of the axes, images, and curves of the graphs



For example, to modify the parameters of the image of a spectrogram, click on this command button. A "Customize" dialog box appears, indicating which of the "axes" in the graph areas you want to edit or modify. After selecting, click the "OK" button. This dialog box is similar to the following:

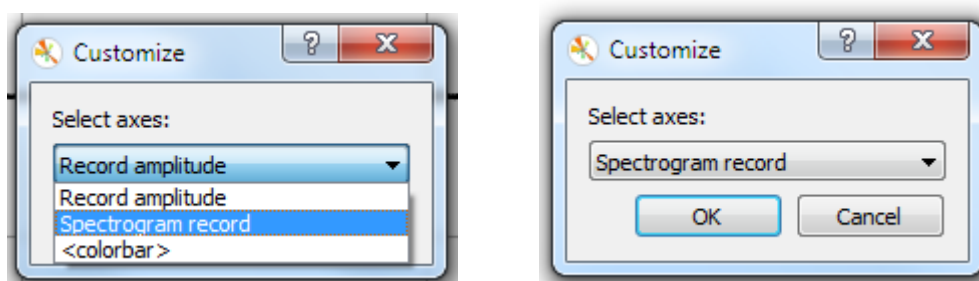


Fig. 90 Customize dialog box, the spectrogram axis has been selected.

Once the desired axis is selected, and the "OK" button is clicked, a new window with the options in the figure is presented. Here, various values of the selected axis are edited, in this case, the spectrogram (*Axes and Images*). The dialog box is as follows:

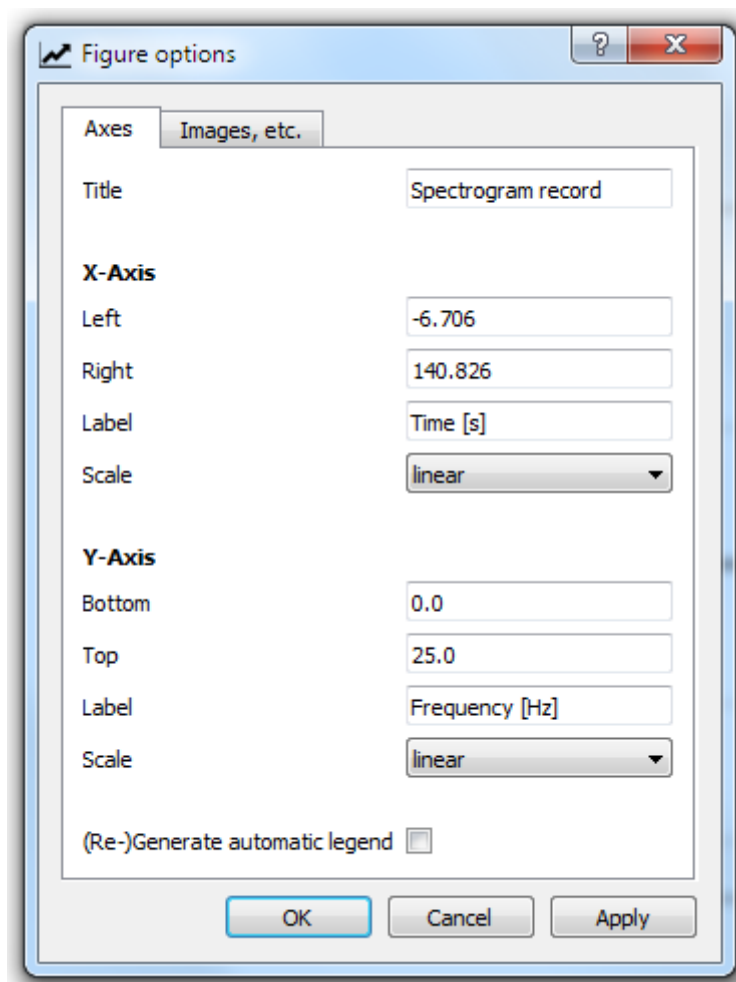


Fig. 91 Dialog box for editing options for the title and axes of the figure.

In this "[Axes](#)" section, as you can see, you can edit or modify the values or parameters of the title and the "X" and "Y" axes of the graph. For our example, we want to modify the image, so we will select the tab indicating this option. The image presented is as follows:

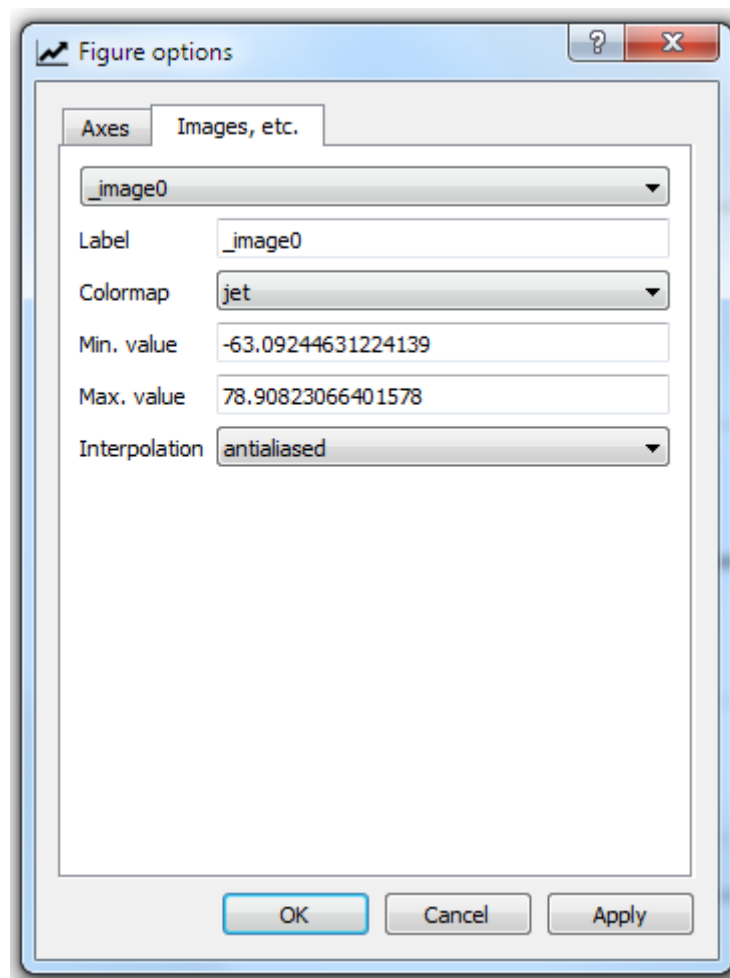


Fig. 92 Dialog box for editing options for image parameters.

As seen in the image, various parameters can be modified, including labels, the color map or "*Colormap*", used in the spectrogram, minimum and maximum values, and interpolation. The default value for the "*Colormap*" is set to "jet". The minimum and maximum values for this color map and the interpolation used are assigned by default to the image, but they can be modified according to the operator's interest.

The list of editable parameter values for both "*Colormap*" and "*Interpolation*" is presented in the figure on the next page.



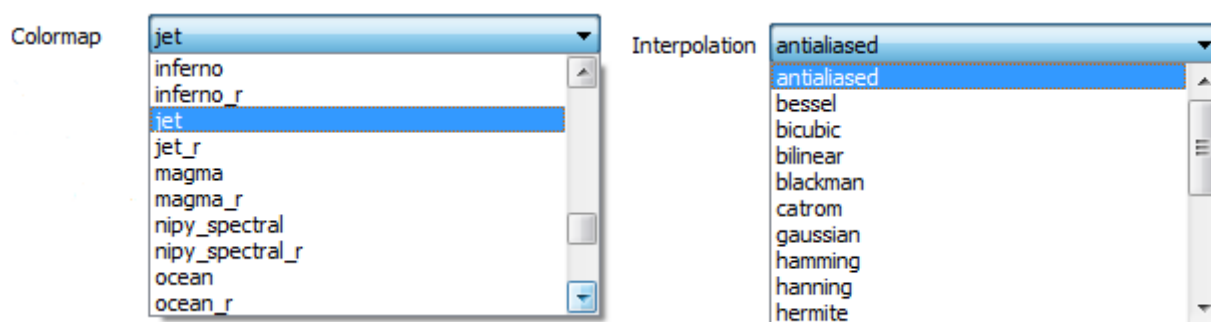


Fig. 93 Dialog boxes for editing some of the parameters of "*Colormap*" and "*Interpolation*" to select in the graph.

**FINAL NOTE:** The system is designed to be a user-friendly, accessible, and comprehensible tool. It offers reliable technological assistance to human operators in the analysis of both tectonic and volcanic seismic records, utilizing one or three components and digital filters. The simplicity of this initial version lies in its individual modules, which include various filter analyses and commonly used graphs in the study of seismic-volcanic signals. It includes the calculation and analysis of metrics such as Shannon Entropy, Frequency Index, Kurtosis and Energy with their respective envelopes. Additionally, it establishes a comparative analysis of Shannon Entropy envelopes using various filter frequencies to determine which frequencies are most suitable for further studies. These metrics and tools are highly useful for establishing increasingly reliable and real-time alert models for future volcanic eruptions. In future versions or updates beyond the current version (1.1), extra modules can be added containing various types of analysis, functionalities, or different methods and algorithms, thereby improving seismic study and research for the benefit of the scientific community.

### Acknowledgments:

This software and its documentation are the result of research from Spanish projects:

- PID2022-143083NB-I00, "LEARNING", funded by MCIN/AEI/10.13039/501100011033
- JMI and LG were partially funded by the Spanish project PROOF-FOREVER (EUR2022.134044)
- PRD was funded by the Ministerio de Ciencia e Innovación del Gobierno de España (MCIN), Agencia Estatal de Investigación (AEI), Fondo Social Europeo (FSE), and Programa Estatal de Promoción del Talento y su Empleabilidad en I+D+I Ayudas para contratos predoctorales para la formación de doctores 2020 (PRE2020-092719).
- Spanish Project PID2022-143083NB-100 founded by MCIN/AEI/10.13039/501100011033 and by FEDER (EU) "Una manera de hacer Europa".
- PLEC2022-009271-"DigiVolCa", funded by MCIN/AEI, funded by MCIN/AEI/10.13039/501100011033 and by EU «NextGenerationEU/PRTR», 10.13039/501100011033.

**END of the document.**


**Ligdamis A. Gutiérrez E. PhD.**

Departamento de Física Teórica y del Cosmos, Facultad de Ciencias.

Instituto Andaluz de Geofísica.

Universidad de Granada (Ugr)

Granada, España – 2023 - 2025



## APPENDIX A

### A1.- Installation of Python and Additional Libraries

#### A1.1. Package Content.

The main folder "*EntropySis1*" contains two subfolders for English and Spanish. Each subfolder includes the following:

- a) Folder "**EntropySis1**": (*Entropy seismic analysis system*). This folder must be copied to "*My Documents*". Contains the following elements:
  - a. Subfolder: "*Images*" Images necessary for program interfaces.
  - b. Program: *Menu1.py*. Start and presentation program.
  - c. Program: *class\_canvas1.py*. Support program for the "*EntropySis1.py*" interface.
  - d. Program: "*ReadSignals1.py*". Module (interface) for reading, filtering, and plotting records with one or three components.
  - e. Program: "*Entropy1.py*". Module (interface) for calculating, filtering, and plotting Shannon Entropy, Frequency index, Kurtosis and theirs envelope.
  - f. Program: "*EnvelopeFilter.py*". Module (interface) for comparison, calculation, and plotting of Shannon Entropy envelopes using various filter frequencies.
- b) Folder "**Document**": containing:
  - a. User Manual: "*User\_manual\_Entropy1\_ES1.pdf*" in PDF, written in Spanish.
  - b. User Manual: "*User\_manual\_Entropy1\_EN1.pdf*" in PDF, written in English.
  - c. File "*Initials\_requirements.txt*". File containing necessary libraries for installation on Windows using "Pip" after installing Python.
  - d. File "*README.txt*": File with general instructions for system installation.
  - e. File "*EntropySis1.bat*" (For Windows use): Batch processing executable file. Copy it to the desktop and run as administrator to start the system.

The system has all the elements (*programs and interfaces*) in English, except for the user manual, which is written in both Spanish and English. To install on Windows, two main actions should be taken after downloading and extracting the "**. Rar**" files. The first is to copy the entire folder (a) to the "*My Documents*" folder on the PC.

- a) Copying the "*EntropySis1*" folder to "*My Documents*" in Windows from the downloaded (. Rar) file after extraction.
- b) Copying the "*EntropySis1.bat*" file from the "(*Document*)" folder to the Windows desktop.

This ensures the proper use of the program. Now, we will proceed with the installation of the Python language and additional Python libraries on Windows.

#### A1.2.- Installing Python on Windows.

Python is an interpreted, multi-platform, and multiparadigm programming language (*it works on various operating systems, including Windows, Linux, and Mac*), utilizing two or more programming paradigms within a program-object-oriented, reflective, imperative, and functional.

In addition, Python can be enriched by a large number of programming modules, libraries, packages, or libraries installed through its package manager, "**Pip**." On Linux, the Python program and its manager "**Pip**" are installed together with the operating system. In Windows systems, however, where Python is not a native language, it is necessary to install this language beforehand by downloading the appropriate version from the Python distribution website at the following address: <https://www.python.org/downloads/>

On the website, the correct version should be selected based on the type of operating system on the computer, including whether it is 32 or 64 bits.

To be installed on both 32 and 64-bit systems, it is essential to note that this document and the software were created with the version available at that time, which was "*Python 3.8.6*", and many more versions have emerged since then. A more modern and adaptable version to the software (*recommended*) is "*Python 10.10*".

Users need to check if more advanced versions do not interfere with some of the installed libraries, such as "**Obspy**," for example. This is because everything related to Linux systems is constantly changing with updates that Python and Linux-based systems make. It is advisable to visit the website and download the most stable or tested updated version of Python that works well with this software.

Once downloaded, run it as an administrator (*right-click and "run as administrator"*), and the software installation wizard will guide you through the necessary steps (*just follow the instructions*).

The process takes only a few minutes. It is "recommended" to indicate during the process, when asked, to include an access path in the system's "**Path**" so that Python can be accessed from any location in Windows. If this is not done during the installation process, it must be done manually by modifying the environment variables (more complicated) to include the path from where Python is installed. This will not be necessary (*if indicated at the beginning*) through the installation wizard.

### **A1.3.- Installation of Additional Libraries.**

The next step is to ensure that Python and its file manager or package manager (**Pip**) have been installed correctly. "**Pip**" (*file and library manager*) is crucial because it allows the installation of additional libraries that Python needs to run the created programs. To do this, open the Windows console window, or "**CMD**." The **CMD**, or command prompt, is a command-line interpreter.

Accessing the CMD is possible by typing, searching for the Windows logo key (a window), located between the "**Ctrl**" and "**Alt**" keys at the bottom left of the keyboard. Pressing this key, plus (+) the letter "**R**" key, will open a "**Run**" program window, similar to the following.



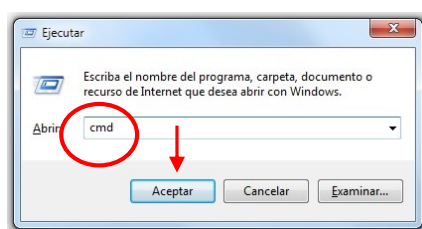


Fig. A1 Screen run in Windows. In the **red circle**, type "**cmd**" and click "**OK**."

As seen in the figure above, type "**cmd**," click "**OK**," which will open the Windows command prompt window.

Another way to do this is at the bottom of the desktop, in (W7) or next to (W10) the Windows "**Start**" button. There is the search section, indicated by the magnifying glass icon. This indicates a search for programs, similar to the following.



Fig. A2 Windows Program Search Screen.

In the box that says "Search programs and files" (Windows 7) or "*Type here to search*" (Windows 10), type "**cmd**" as well. This action or the previous one will bring up the Windows command prompt (**CMD**), similar to the following (W7).

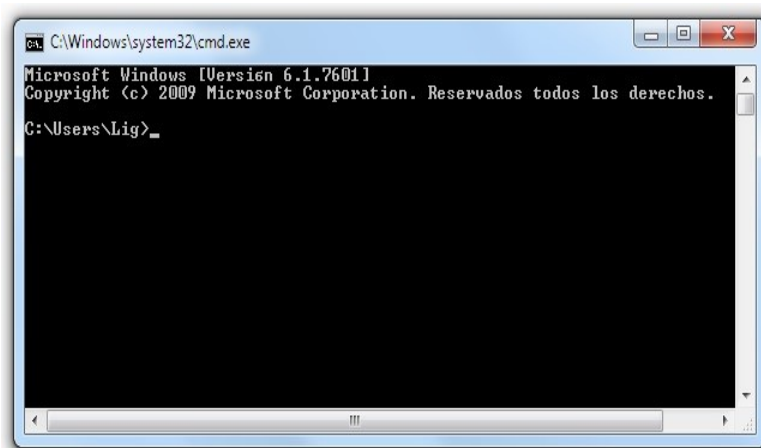


Fig. A3 Windows 7 Command Prompt (CMD) Screen.

The same applies to versions: Windows 10 (W10) or Windows 11 (W11).

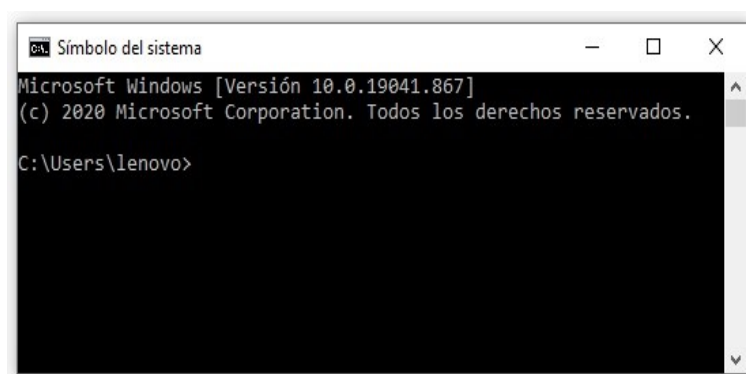


Fig. A4 Command Prompt (CMD) Screen in Windows 10.

Once on this screen, to verify that both Python and its package manager "[pip](#)" have been installed correctly, type the following commands: [Python -V](#), and to check "[pip](#)," type: [pip -V](#). This is shown in the following figure.



Fig. A5 CMD Screen, indicating Python and pip versions in Windows.

The output of typing "[-V](#)" in Python indicates invoking the installed version. In this case, it can be seen that it is "3.8.6" (*The library set is compatible with version 3.10.10*). This has been possible from any location in the system because the Python script has been installed, remember, in the "**path**" or route found in the system's environment variables. Also, after typing "[pip -V](#)", it can be seen that the Pip version is "20.2.1." At this point, it is recommended to update this version since, by default, "[Pip](#)" is installed along with "[Python](#)", but it does not install the latest or most up-to-date version. To do this, in the CMD window or console, type the following command (*Windows/Linux*): On Windows, type "[python](#)," and on Linux, type "[python3](#)".

**Windows:** `> python -m pip install --upgrade pip` | **Linux:** `$ sudo python3 -m pip install --upgrade pip`

This indicates that "[Pip](#)" will be updated to its most recent version (*On Linux, as a "superuser," i.e., with "sudo" at the beginning*). It is shown in the following screen.

```

C:\Users\Usuario>python -V
Python 3.8.6

C:\Users\Usuario>pip -V
pip 20.2.1 from c:\users\usuario\appdata\local\programs\python\python38\lib\site-packages\pip (python 3.8)

C:\Users\Usuario>python -m pip install --upgrade pip
Collecting pip
  Downloading pip-21.0.1-py3-none-any.whl (1.5 MB)
    | 1.5 MB 2.2 MB/s
Installing collected packages: pip
  Attempting uninstall: pip
    Found existing installation: pip 20.2.1
    Uninstalling pip-20.2.1:
      Successfully uninstalled pip-20.2.1
  Successfully installed pip-21.0.1

C:\Users\Usuario>pip -V
pip 21.0.1 from c:\users\usuario\appdata\local\programs\python\python38\lib\site-packages\pip (python 3.8)

C:\Users\Usuario>

```

Fig. A6 Screen showing the update and verification of the new version of pip in Windows.

As can be seen, when typing again (**pip -V**), once Pip is updated, the version is 21.0.1. With this, Python and Pip are already installed and updated. Pip, as mentioned, is very important because with this manager, all the necessary libraries and packages are installed so that Python applications can be executed correctly and without errors. To use the system, you must proceed to install the necessary packages or libraries through Pip.

Next, we will proceed to explain how, in a simple and completely automatic way, the most commonly used and general libraries that Python needs will be installed on the system. Libraries such as, for example, "**obspy**," which is the open-source library or software based on Python for processing seismological data. Also, "**matplotlib**," which is a library for generating graphics from data contained in lists or arrays in Python and its mathematical extension "**NumPy**," among others, which the system needs for its execution (*See Annex B*).

#### A1.4 Automatic Installation of Libraries on Windows and Linux from PIP

The advantage of having already installed and updated Pip in Windows is that you can install all the libraries that Python needs to run the system.

Additionally, in the "*Document*" folder, the "*Readme.txt*" file contains instructions for this installation. So the user only needs to follow the instructions, and the necessary packages will be installed on the computer (PC) automatically by Pip, both on Windows and Linux. The required libraries are in the file called "*Initial\_requirements.txt*", included in the "*Document*" folder of the downloaded installation files and in **Annex B**.

In a Windows Command Prompt (**Cmd**) window, actions are taken for each of the commands indicated in the file, following the instructions. The installation should not present problems on Windows and Linux systems. If any library encounters an error during installation (*shown in red in CMD*), you should consult the documentation for that library or check if the correct or recommended version of Python is being installed (*version 3.8.6 and/or 3.10.10*). The installation on Linux systems (*See README.txt*) is similar and simpler. Copy the main folder to the desktop, the personal folder, etc. From that location, open a command prompt, and simply type "**\$ python3 Menu1.py**" to start the system.



## APPENDIX B:

### INSTALL PYTHON LIBRARIES FOR THE PROPER FUNCTIONING OF THE SYSTEM.

1.- PIP: The **Pip** (*Preferred Installer Program*) is the package or package management manager used to install and manage software packages written in Python. When installing Python, Pip is installed by default. To check the version of Python or PIP, type the following in a console or CMD:

```
python -V / pip -V And to see the list of installed pip packages: -> pip list
```

Usually, you need to update the version of pip with which Python is installed. For this, type the following command in the command prompt (CMD). In Linux and Mac systems, "sudo" is placed at the beginning to indicate super-user permissions.

```
Python -m pip install --upgrade pip / (LINUX) -> sudo python -m pip install --upgrade pip
```

Once downloaded and installed, you can check the version again with the first command, and you will see that the version has changed and been updated. Now that pip is updated, we will proceed to install the necessary packages for Python to work correctly with the applications.

2.- **PyQt Installation:** This is a Python binding for the Qt library written in the C++ language. It is used for creating and using graphical user interfaces (GUI) in Python. Type the following in the command prompt (CMD).

```
pip install PyQt5 / (LINUX & Mac) -> sudo python install PyQt5
```

3.- **Matplotlib library Installation.** Matplotlib is the library that allows the creation and visualization of graphics. Type the following:

```
pip install matplotlib / (LINUX & Mac) -> sudo python install matplotlib
```

4.- Install the **Obspy** library. This library is for handling seismic signals. Type the following:

```
pip install obspy / (LINUX & Mac) -> sudo python install obspy
```

5.- Install **Thinter**: Thinter is a graphical user interface (GUI). Type the following:

```
pip install tk / (LINUX & Mac) -> sudo python install tk
```

6.- Install **quantecon**: This library is used for spectrum estimation, Periodogram, Fourier transform. Type the following:

```
pip install --upgrade quantecon / (LINUX & Mac) -> sudo python install --upgrade quantecon
```

7.- Update a library for **matplotlib**. To avoid problems with graphics, install the following:

```
pip install msvc-runtime / (LINUX & Mac) -> sudo python install msvc-runtime
```

8.- Install **easygui** for the graphical interface:

```
pip install easygui / (LINUX & Mac) -> sudo python install easygui
```

9.- Install **PyWavelets** for CWT handling.

```
pip install PyWavelets / (LINUX & Mac) -> sudo python install PyWavelets
```

10.- Install **plotly** for handling and assisting with graphics along with Matplotlib.

```
pip install plotly / (LINUX & Mac) -> sudo python install plotly
```

Finally, type "`pip list`" to see the installed libraries. Optionally, you can create a file called "**requirements.txt**" that will contain all the libraries that the PC will use. The "**requirements.txt**" file must be in the current directory. The instruction to do this is as follows:

```
pip freeze > requirements.txt
```



## APPENDIX C:

### Methodology: Definitions of the metrics or analysis tools to be used.

The set of mathematical tools used in the second module, where the core analysis is concentrated, is based on four main parameters or metrics. These parameters involve precise mathematical calculations and provide highly valuable insights for evaluating the complexity and structure of seismic signals present in active volcanoes. The parameters in question are: a) *Shannon Entropy*, b) *Kurtosis*, c) *Frequency Index*, and d) *Energy*.

This section will present a summary of their definitions and their relevance in the study of seismic signals. Below, the basic concepts of each of these metrics will be introduced, along with their importance in the study and analysis of seismic-volcanic signals.

#### a) *Shannon entropy (Hx)*:

In general terms, **Shannon Entropy (Hx)**, a concept proposed in 1948 by mathematician Claude Shannon<sup>14</sup>, states that: "*Entropy measures the amount of uncertainty or randomness in a dataset or signal*", in our case, this refers to the seismic signal. Thus, as the value of entropy increases, so does the uncertainty or disorder in the data, which implies that the seismic information or data becomes more difficult to predict. When entropy reaches its maximum, it reflects a higher degree of randomness. On the other hand, lower entropy values indicate less uncertainty. **Shannon Entropy** is defined by the following formula:

$$H(x) = - \sum_{i=1}^n p(x_i) \log_2 p(x_i) \quad (1)$$

Where **Entropy H(x)**, for a random variable (x), takes different values from 1 to n, with probabilities  $p(x_i)$ . In this way, entropy is related to the probabilities of occurrence of the various values that x can take.

Thus, if all the probabilities are equal, the entropy value is at its maximum, which—as mentioned earlier—indicates a higher degree of randomness. Conversely, if there is a dominant value with a probability greater than the others, the resulting entropy value will be lower, reflecting less uncertainty.

In the case of seismic signals, the value of entropy provides a measure of the complexity and randomness in the time series present in the various seismic waves generated by active volcanoes. Entropy can be used to analyze signals or events known as "premonitory" events.

The entropy value in seismic signals may decrease to values close to zero before major and explosive events such as a volcanic eruption, which can aid in the prediction of both strong earthquakes and imminent eruptions in active volcanoes by indicating changes in the dynamics of the geophysical forces present in the seismic waves.

#### b) *Kurtosis (Cr)*:

**Kurtosis (Cr)** is a statistical parameter that describes the shape of the distribution of the information contained in the records or data, particularly in terms of the "sharpness or energy peaks" or the "flatness" of the distribution compared to a normal (Gaussian) distribution.

---

<sup>14</sup> Shannon, C. E. (1948). A mathematical theory of communication. The Bell system technical journal, 27(3), 379-423

In mathematical terms, it can be described as the fourth central moment of a distribution divided by the variance squared, and it relates to the degree of concentration of energy in the central or extreme values.

In seismology, **Kurtosis (Cr)** calculates the shape of the distribution of a seismic signal, especially whether it has pronounced peaks (i.e., events with highly concentrated energy) or is flatter (a more uniform distribution).

Unlike entropy, kurtosis focuses on the extreme values and the shape of the signal around its mean. It is particularly useful for locating seismic events.

The difference between Shannon Entropy and Kurtosis is that entropy measures the complexity, uncertainty, or randomness of the seismic signal, whereas kurtosis focuses more on the extreme values and the shape of the seismic signal around its mean, allowing the identification of high-energy, short-duration events.

The formula for Kurtosis (Cr) is:

$$Cr = \frac{\sum_{i=1}^n (x_i - \bar{x})^4}{n \cdot S^4} - 3 \quad (2)$$

Where: The calculation of the mean of the seismic signal is performed (that is, the average of all the seismic signal values). The summation of the values (from  $i = 1$  to  $n$ ) of the data points  $x_i - \text{media } x$ . This computes the fourth central moment, which is in the numerator (raised to the 4th power). It evaluates how the values of the seismic signal are distributed relative to the mean. In other words, the dispersion of the values raised to the fourth power with respect to the mean, or equivalently, the fourth moment about the mean of the values.

This is then divided by the square of the standard deviation of the data set. In formula (2), adjusted kurtosis is used, which subtracts 3 so that the kurtosis of a normal distribution equals zero. This adjustment makes interpreting the results easier, as a value close to zero indicates a distribution similar to normal.

This formula helps quantify whether a seismic signal has extreme peaks (high kurtosis) or is more evenly distributed (low kurtosis).

#### c) **Frequency Index (FI):**

The third parameter to be analyzed in this work is the Frequency Index. In seismology, the **Frequency Index (FI)** can also be used. It is a useful metric for analyzing the spectral content of seismic signals. It indicates the relationship between the different frequencies that make up a given seismic signal and their evolution over time, which helps to identify and classify different types of seismic events related to volcanic activity, especially during the eruptive process.

In general terms, the Frequency Index (FI) is a calculation process that quantifies whether a given seismic signal has predominant values in either high or low frequencies. Its definition is based on the difference or ratio between the frequencies that dominate a seismic event within two spectral ranges.

Thus, the **FI** is first calculated for calibration events and then for all earthquakes during a seismic swarm, following the procedure of Buurman and West [2010]<sup>15</sup>. The **FI** is calculated using the following formula:

$$FI = \log \frac{(A_{high})}{(A_{low})} \quad (3)$$

Where “**A**” is the average amplitude, measured from a seismic signal waveform within a high- or low-frequency band.

The usefulness of the Frequency Index in seismic signals during eruptive processes lies in the fact that if signals predominantly show low frequencies (*usually below 1–5 Hz*), these are often associated with volcanic tremor (a constant low-frequency vibration caused by prolonged movements of magma, gases, or fluids inside the volcanic edifice) and long-period (LP) waves, which represent low-frequency seismic signals related to fluid movements such as magma or gases in cavities or conduits within the volcanic edifice. This results in a low Frequency Index (**FI**).

On the other hand, if high Frequency Index (**FI**) values are observed, it indicates the presence of signals dominated by high frequencies (*above 5 Hz*), which suggest either rock fracturing in response to the pressure exerted by ascending magma toward the surface or volcanic explosions, which are abrupt events generating seismic signals with a high content of high frequencies due to the sudden release of energy in the volcano.

Therefore, the Frequency Index parameter is a computational tool that, by indicating the predominance of high or low frequencies in seismic signals, helps to understand the evolution of volcanic activity by providing information about the internal processes within the volcano, whether magma movement (*low frequency*) or rock fracturing and explosions (*high frequency*).

#### d) **Energy (E):**

The fourth and final parameter included in this work is Energy (E). Energy is very important in signal processing. In seismology, it allows the characterization of earthquakes and volcanic explosions. It is also useful for distinguishing between different types of seismic events and for efficiently monitoring the evolution of volcanic activity. This makes it possible to detect and anticipate changes, thereby determining the state of the volcano’s evolution over time more accurately, which in turn helps assess risk and make alert decisions.

The energy of a seismic signal represents the amount of work done by seismic waves as they propagate through the Earth. The energy of a seismic signal  $x(t)x(t)x(t)$  in the time domain is obtained by integrating the square of the signal’s amplitude over time. Its formula is as follows:

---

<sup>15</sup> Buurman, H., and M. E. West (2010), Seismic precursors to volcanic explosions during the 2006 eruption of Augustine Volcano, in The 2006 Eruption of Augustine Volcano, Alaska, U.S. Geol. Surv. Prof. Pap., vol. 1769, edited by J. A. Power, M. L. Coombs, and J. T. Freymueller, pp. 41–57, U.S. Geol. Surv., Reston, Va.

$$E = \int_{-\infty}^{\infty} |x(t)|^2 dt \quad (4)$$

The integral in formula (4) represents the area under the curve of the squared magnitude of the signal in the time domain. However, in practice, with digital signals (*such as those recorded by seismometers*), the discrete version is used, whose formula is as follows:

[Back to Index](#)

$$E = \sum_{i=1}^N x_i^2 \quad (5)$$

Where:  $x_i$  is the amplitude of the seismic signal at an instant in time ( $i$ ).  $N$  is the total number of samples of the signal.

In this case, the energy of the signals is calculated by summing the squares of the amplitudes, which allows distinguishing seismic events from noise. This way, the peaks of events present in the signal (*VT, Explosions, LP*) can be identified.

It is useful because it allows calculating the total energy contained in a seismic signal within a specific time interval. This makes it possible to evaluate the frequency ranges that carry the most energy, enabling differentiation between low- or high-frequency signals. In turn, this can provide information about the origin of seismic events (whether magmatic activity or rock fracturing caused by pressure or gases).

Therefore, energy analysis, combined with parameters such as Entropy, Kurtosis, and Frequency Index, provides an extremely useful tool for monitoring and especially for the evolution and prediction of seismic and volcanic activity, helping to prevent imminent eruptions and enabling the development of better eruptive prediction models for volcanoes.