![CLT poster display image](X-Poster Pro 83")

CLT COMMERCIAL **LED**

POSTER SCREEN SYSTEM SOLUTION

X-Poster Pro 83"

(P3.125/P2.5/P1.875)

Free Splicing, Unlimited Imagination

X-Poster Pro Features

◆ Frame Size: 630.2*2055.2mm
◆ Display size: 600mm x 2025 mm
◆ Display Model: Sync/async model
◆ Output Signal: HDMI
◆ Operation System: Android system
◆ Operation Mode: Signal wires/ WIFI/ 4G/U disk
◆ Thickness: 35mm
◆ Slim Frame Design: 10mm
◆ Full Front Maintenance Design
◆ Aluminum Alloy Integrated Frame
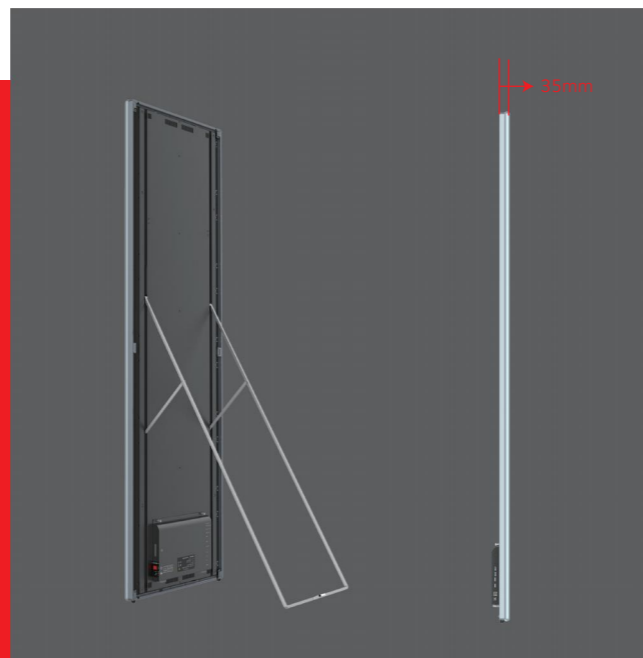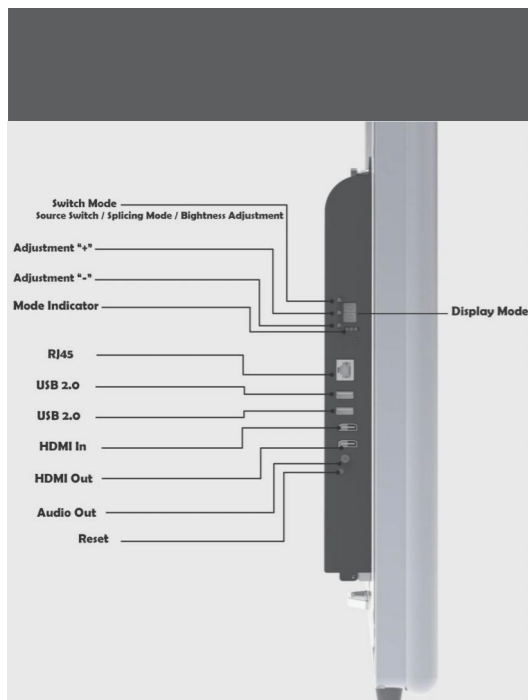◆ Foldable Bracket
◆ Super Light Design with 39kg/set

HD Quality

★ 3,840 Refresh rate
★ 600-1,000cd/m² (8 level adjustable)
★ 6,000:1 high contrast
★ 160° Wide viewing angle
★ 16 Bit
★ Adaptive resolution, media spread on full
  screen automatically
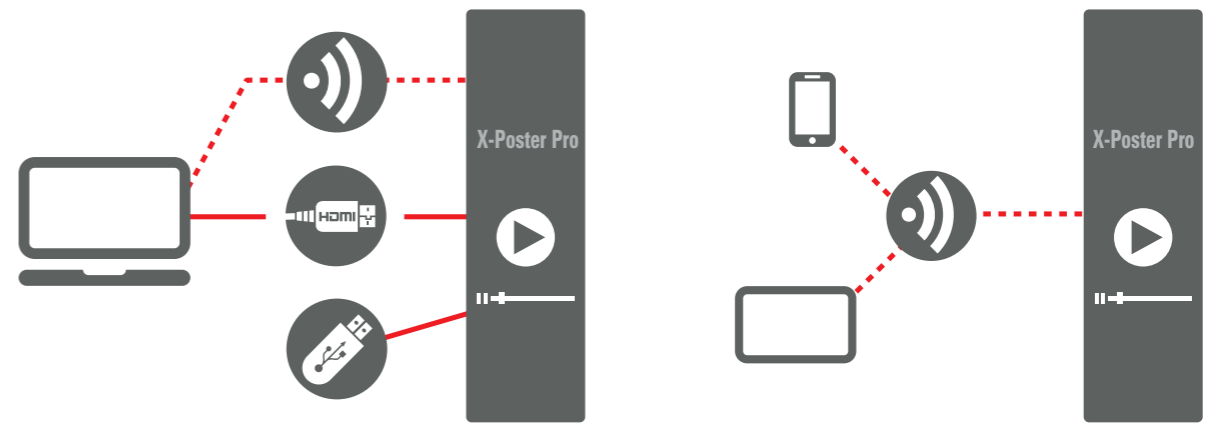
X-Poster Pro

Free Splicing, Unlimited Imagination

X-Poster Pro

Rich Interfaces

Switch Mode
Source Switch / Splicing Mode / Bightness Adjustment

Adjustment "+"

Adjustment "-"

Mode Indicator

RJ45

USB 2.0

USB 2.0

HDMI In

HDMI Out

Audio Out

Reset

Display Mode

35mm

USB	HDMI	RJ45	4G network
Audio out	Brightness adjustment	WIFI	

- Video Interfaces:
  HDMI*2（1 input and 1 output）
  USB 2.0x2
- Audio Interface:
  DB5.0
- Control Interface:
  RJ45，WIFI

Various Control Mode

X-Poster Pro

HDMI

X-Poster Pro

- U disk, HDMI Sync and Ethernet internet connection
- Easy & fast of Smart Phone/PC wireless control in 3 steps
- Easy & fast of USB plug&Play
- HDMI HD signal synchronous input, setting-free, adaptive resolution
- Ethernet LAN control, multi-window mode is available

Intelligent cluster management

· Intelligent cloud control and release
· Intelligent remote monitoring, remote timer switch screen
· Easier platform：B/S web architecture mode-you can open a browser, you can manage X-Poster Pro

Multi-screen Playback, High degree of consistency

· Multi-screen play at the same time without delay
· Wireless control by App, computer, iPad LAN
· Support ethernet, WIFI, 4G
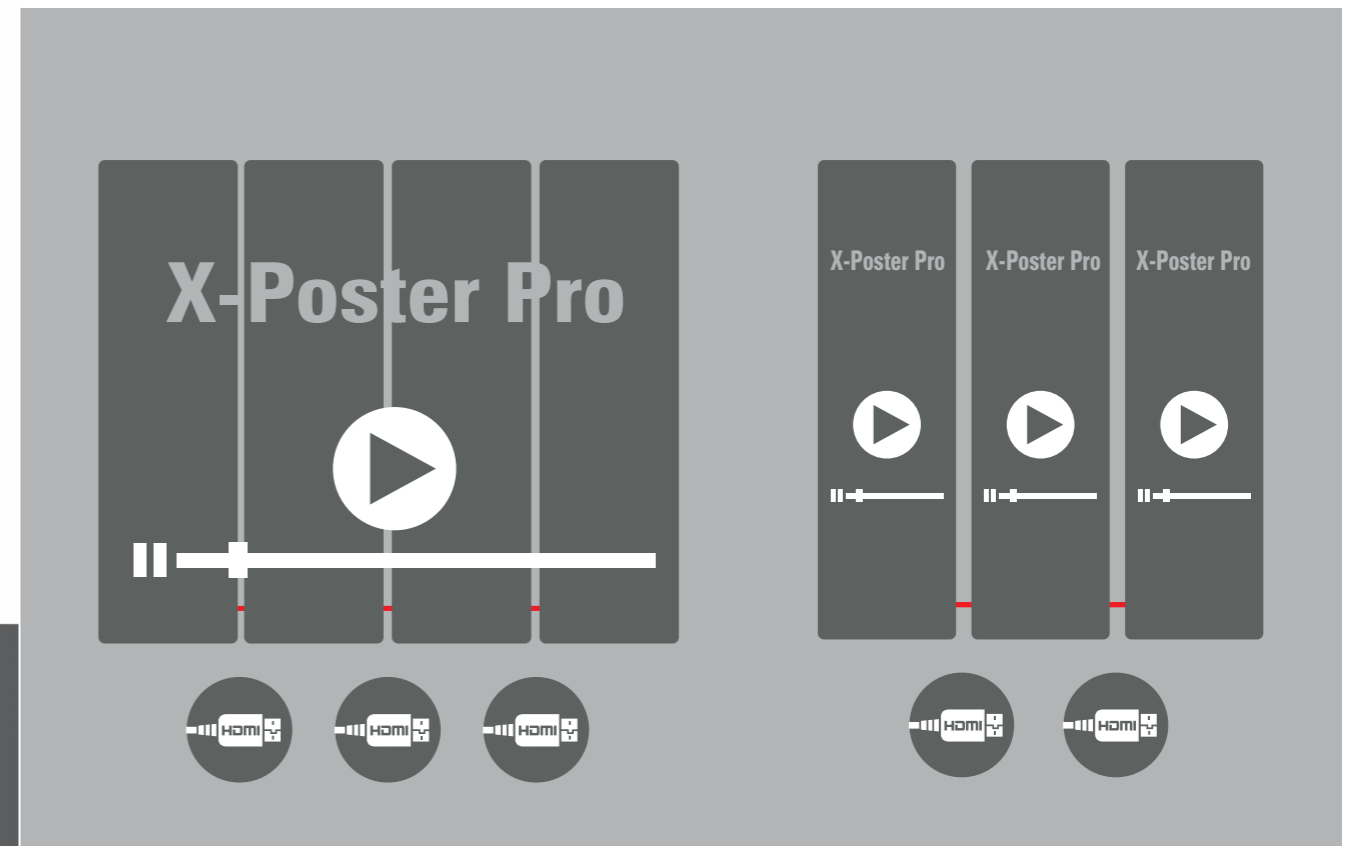· Suitable in many projects like rail transport, supermarket display, Retail chain

X-Poster Pro

Multi-screen Seamless Splicing playback

· CLT-PATENT "Magnetic Snap Frame" +seamless splicing
· 2K can be spliced by 6 sets X181P
· 6 seconds quick splicing
· Much more time-saving, spare parts saving for specific 2K or small indoor rental

Various Playback Mode

· Support mirror mode and split screen mode

X-Poster Pro

X-Poster Pro   X-Poster Pro   X-Poster Pro

X-Poster Pro

Support Different Ways of Installation

X-Poster Pro Supports stacking, bracket mounting, vertical and horizontal hanging, wall mounting, DIY splicing, etc.

Wall mounting

Vertical standing

Bracket landing

Hanging

Wall mounting

DIY splicing

X-Poster Pro

Maintenance

· Modules front maintenance, power and system card rear maintenance
· Better way to protect LEDs by Air-suction maintenance tool
· GOB technique no occlusion making it directly front maintenance, quicker than before
· Replacing system cards directly without further settings

Air Suction Front
Maintenance Tool

Main Control Board
Free-tool Maintenance

Standard accessories

Network Cable   HDMI Wire   Denim Bag

Paid parts

Hanging garment   Front maintenance tool   Base bracket

Standing bracket   Flight case

Specification

Parameter	X181P-83"	X251P-83"	X311P-83"
Pixel Pitch (mm)	1.875	2.5	3.125
Resolution (WxH)	320x1080	240x810	192x648
Operating System	Android	Android	Android
Screen Display Size (mm)	600 x 2025	600 x 2025	600 x 2025
Total Size (WxHxD) (mm) (With frame)	630 x 2055 x 42.6	630 x 2055 x 42.6	630 x 2055 x 42.6
Weight (kg/screen)	39	39	39
Grayscale (Bit)	14	14	14
Refresh Rate (Hz)	≥3840	≥3840	≥3840
Contrast Rate	6000:1	6000:1	6000:1
Brightenss (nits)	0-800 (10-level adjustment)	0-800 (10-level adjustment)	0-800 (10-level adjustment)
Viewing Angle (H°/V°)	160°/160°	160°/160°	160°/160°
Video Interface	HDMI*2 (1 Input and 1 Output), USB 2.0*2	HDMI*2 (1 Input and 1 Output), USB 2.0*2	HDMI*2 (1 Input and 1 Output), USB 2.0*2
Audio Interface	External Audio Interface	External Audio Interface	External Audio Interface
Control Interface	RJ45, WIFI, AP Local Network, 4G Network (Optional)		
Video Format	MP4, AVI, WMV, etc.	MP4, AVI, WMV, etc.	MP4, AVI, WMV, etc.
AC Input Power Max. / Avg.(W/screen)	520W/screen / 155W/screen	600W/screen / 200W/screen	600W/screen / 200W/screen
Installation / Maintenance	Standing (Standard) / Stacking(Optional) / Hanging(Optional) / Wall Mounting		

X-Poster Pro

Free Splicing, Unlimited Imagination