

Internal Design



1 **LOADING HOPPER**

Thanks to its special internal geometry, the hopper ensures the ideal flow of the grain and an optimal feed into the drying column.

2 **MAIN FANS**

Placed on the opposite side of the burner, they work in suction mode, ensuring a uniform air flow. The fans are equipped with a silencer and a shutter to minimize acoustic and dust emissions into the environment.

3 **CATWALKS**

Fitted outside and inside the grain dryer, they provide safe and easy access for routine inspection and maintenance, ensuring maximum safety for operators.

4 **AIR DUCTS**

The profile of the ducts is designed to facilitate the flow of the grain and heat exchange between the hot air and the grain to be dried.

5 **HEAT GENERATOR**

The inline burner, available for natural gas and LPG, ensures accurate modulation and air temperature uniformity. Also available in a diesel version.

6 **RECOVERY FANS**

Placed at the bottom of the dryer, the fans collect some of the hot air from the drying process to reintroduce it into the cycle and improve energy efficiency.

7 **EXTRACTION DEVICE**


Consisted of opening shutters that allow for an even and controlled grain discharge.

8 **BASEMENT**

Structural element anchored to the ground that ensures the stability of the dryer, certified to withstand extreme wind, snow and seismic conditions.



DISCOVER THE PRODUCTS

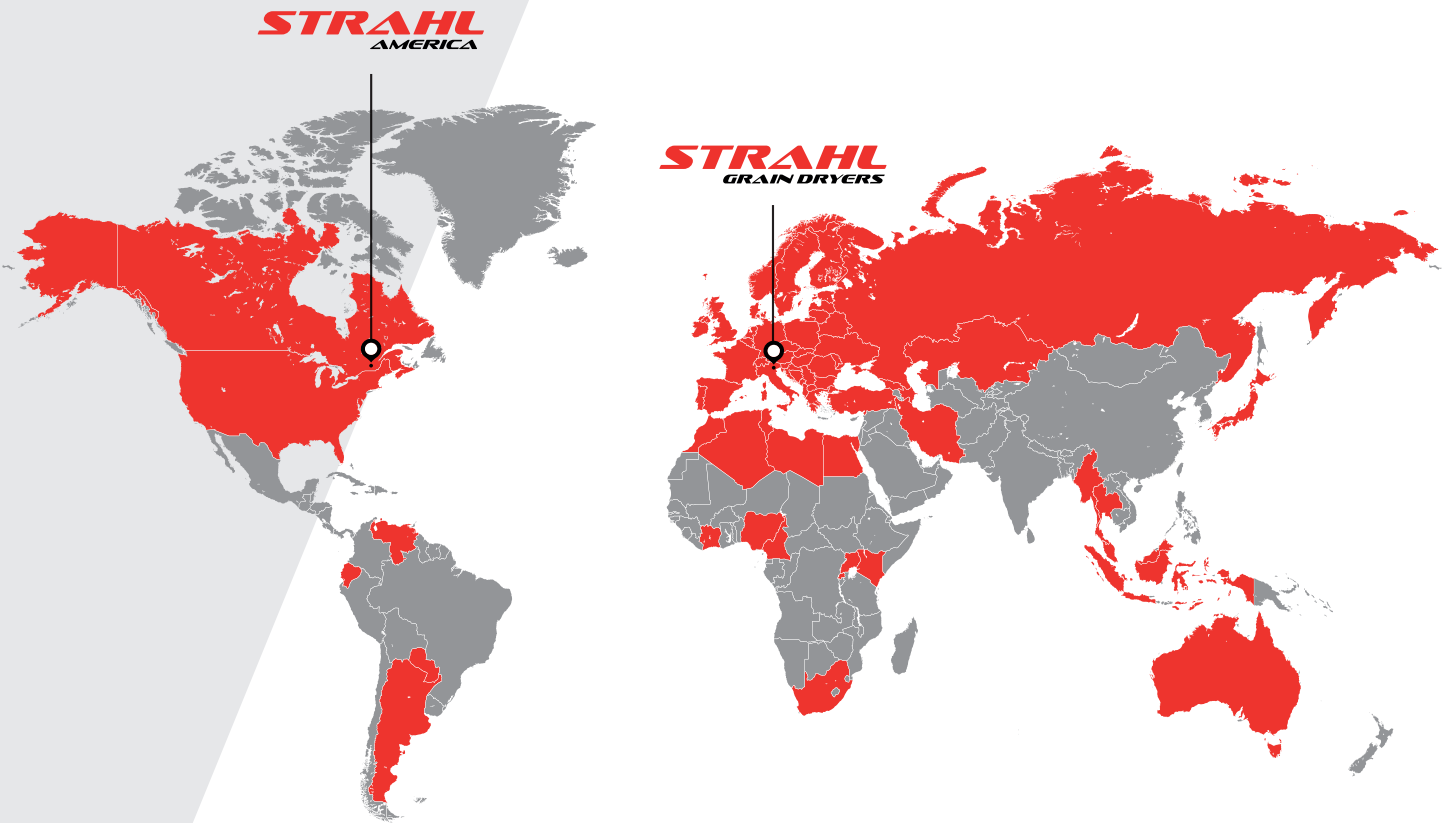

STRAHL
GRAIN DRYERS

Via Roma 139 | 31020 Villorba (TV) | Italy

+39 0422 919178

strahl@strahl.it
strahlgraindryers.com

X10
PERDIECI

STRAHL
GRAIN DRYERS

FR SERIES
Grain Dryer



FR Series: the continuous flow grain dryer with heat recovery

The FR series is an advanced continuous cycle dryer solution designed to optimise fuel consumption on any size of processing volume.


Thanks to an innovative recovery fan system, the FR series maximises energy efficiency, significantly reducing operating costs and environmental impact.



The Strahl software control

A SMART PROCESS CONTROL SYSTEM

The Strahl software, developed specifically for our dryers, tailored to customers' needs, ensures precise temperature control and full data management, available on the cloud. Thanks to predictive analytics and detailed reports, energy consumption is optimised, thereby improving the grain dryer efficiency. The intuitive and user-friendly touchscreen interface, with built-in connectivity, lead to continuous monitoring and remote management.

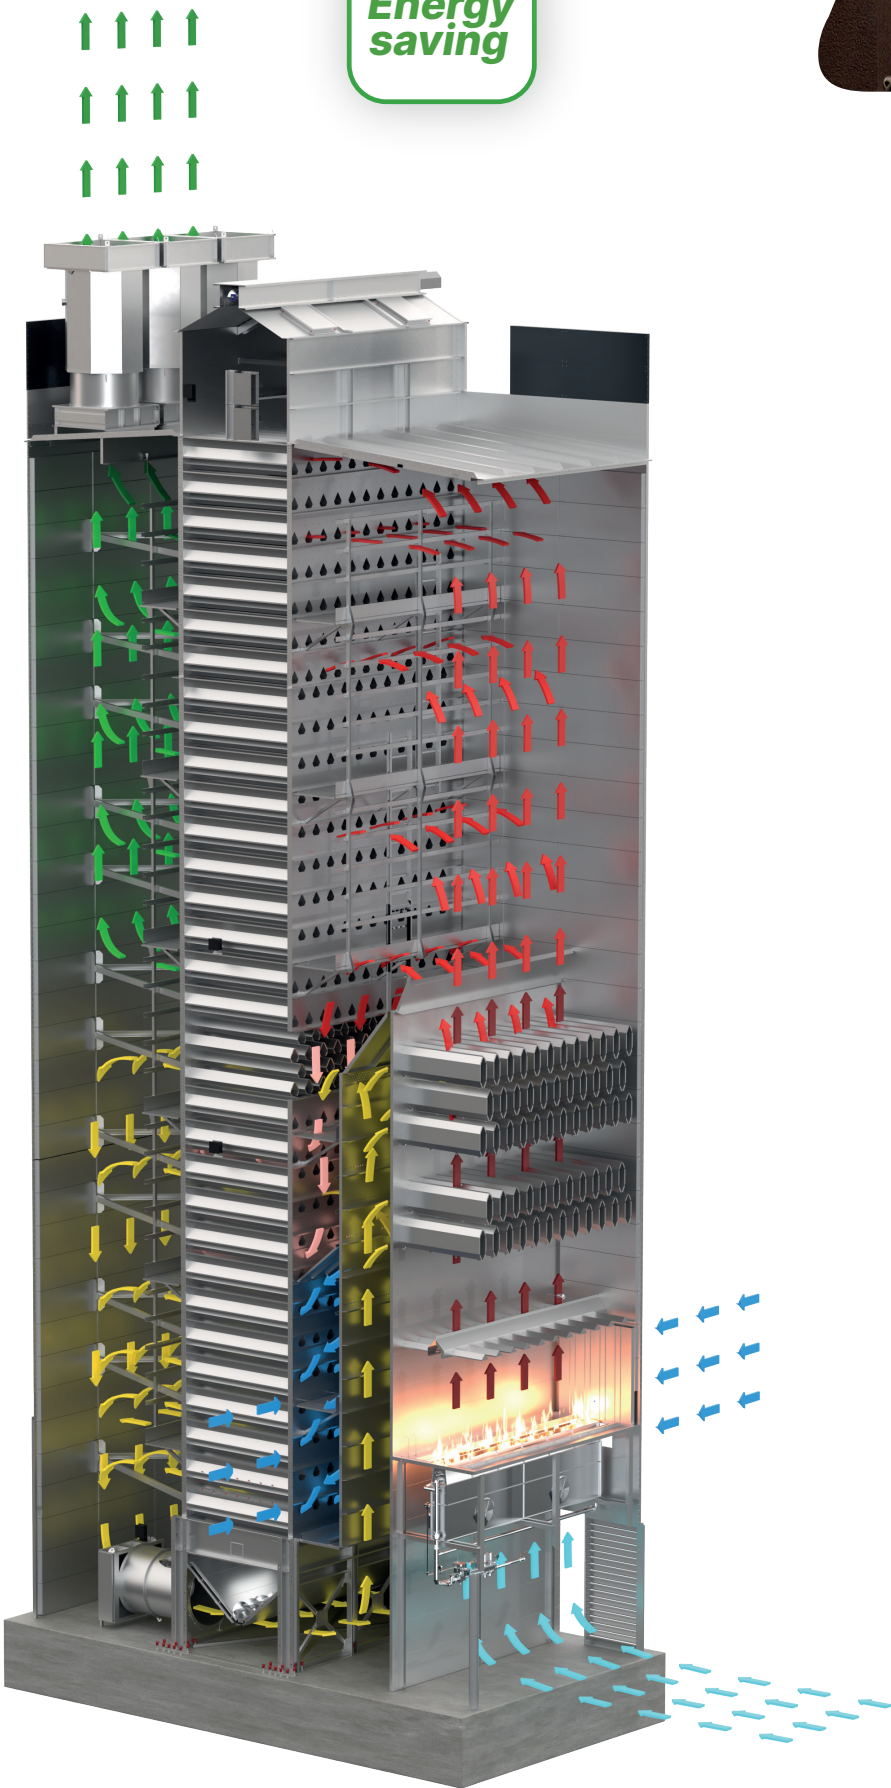


External air enters the dryer to be heated and support the process.

External air heated by the burner flows throught the grain releasing internal moisture.

Hot air at the bottom of the grain dryer, which is still efficient, is recovered and reintroduced into the system to reduce consumption.

Exhaust air is blown out from the dryer, as it is saturated with moisture from the drying process.

In the lower area of the dryer, the product is cooled with external air before extraction.

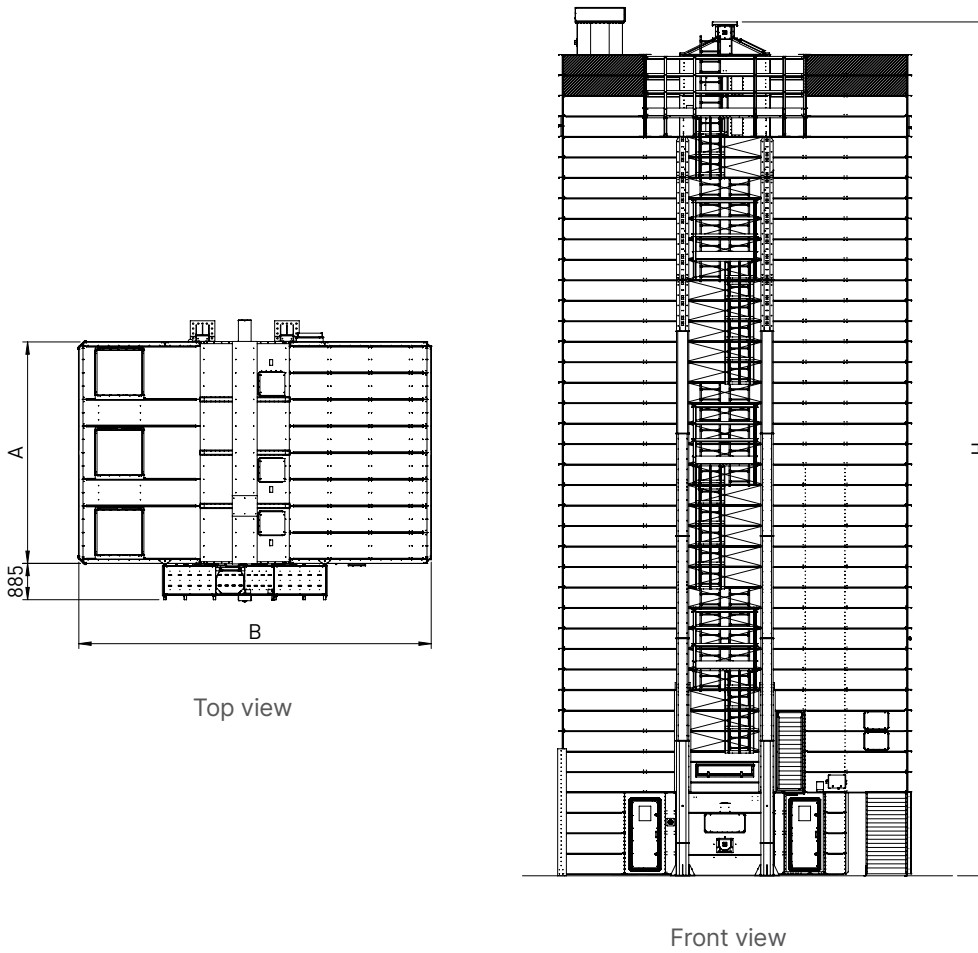

MODEL	4 MODULES				6 MODULES								8 MODULES				
	1600	2000	2500	3000	2500	3000	3500	4000	4500	5000	6000	7000	5000	6000	7000	8000	9000
	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR
Overall dimensions	B m	7,6	7,6	7,6	7,6	7,6	7,6	7,6	7,6	7,6	8,6	9,1	7,60	7,60	7,60	8,60	8,60
	A m	2,80	2,80	2,80	2,80	4,10	4,10	4,10	4,10	4,10	4,10	4,10	5,40	5,40	5,40	5,40	5,40
	H m	10,75	12,25	14,25	16,75	10,75	12,25	13,75	14,75	16,25	17,75	20,25	14,75	16,75	18,75	20,75	22,75
Capacity	Ton	24	28	34	41	36	42	48	52	59	66	76	89	71	82	94	105
	m³	32	37	45	55	48	56	64	69	79	88	101	119	95	109	125	140
Exhaust air fans	N°	1	1	1	1	1	1	2	2	2	2	3	3	2	3	3	3
	kW	11	15	15	22	15	22	11	15	15	18,5	15	15	18,5	15	15	18,5
Recovered air fans	N°	1	1	1	1	1	1	1	1	1	1	2	2	1	2	2	2
	kW	7	11	11	11	11	11	15	15	18	18,5	11	15	18,5	11	15	18,5
Nominal thermal power	kW	1.210	1.510	1.890	2.270	1.890	2.270	2.650	3.020	3.400	3.780	4.530	5.290	3.780	4.530	5.290	6.050
Max. burner thermal power	kW	1.220	1.630	2.440	2.440	2.440	2.440	3.260	3.260	4.070	4.070	4.880	6.510	4.070	4.880	5.700	6.100
Hourly wet production Tonne/h																	
Corn 35% - 15%	4	6	7	8	7	8	10	11	13	14	17	20	14	17	20	22	25
Corn 25% - 15%	8	11	13	16	13	16	18	21	24	26	32	37	26	32	37	42	47
Corn 20% - 15%	15	19	24	29	24	29	33	38	43	48	57	67	48	57	67	76	86

MODEL	8 MODULES			10 MODULES						12 MODULES					14 MODULES		
	10000	11000	12000	10000	11000	12000	13000	14000	15000	15000	16000	17000	18000	20000	17000	18000	20000
	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR	FR
Overall dimensions	B m	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10	9,10
	A m	5,40	5,40	5,40	6,70	6,70	6,70	6,70	6,70	8,00	8,00	8,00	8,00	8,00	9,30	9,30	9,30
	H m	24,95	26,95	29,45	20,95	22,95	24,95	26,45	27,95	29,45	25,45	26,95	27,95	29,45	31,95	25,45	26,95
Capacity	Ton	127	139	152	133	146	161	171	181	192	197	209	218	230	251	232	246
	m³	169	185	203	177	195	215	228	241	256	263	279	291	307	335	309	328
Exhaust air fans	N°	4	4	4	4	4	4	5	5	5	4	4	4	5	4	4	5
	kW	18,5	22	22	18,5	22	22	30	22	22	22	37	45	45	37	45	45
Recovered air fans	N°	2	2	2	2	2	2	3	3	3	3	3	3	4	3	3	4
	kW	18,5	22	22	18,5	22	22	18,5	22	22	22	22	30	22	22	30	22
Nominal thermal power	kW	7.560	8.310	9.070	7.560	8.310	9.070	9.830	10.580	11.340	11.340	12.090	12.850	13.600	15.120	12.850	13.600
Max. burner thermal power	kW	8.140	9.770	9.770	8.140	9.770	9.770	11.400	11.400	11.400	11.400	12.210	13.020	14.650	16.280	13.020	14.650
Hourly production rate (Ton/hour)																	
Corn 35% - 15%	28	31	34	28	31	34	36	39	42	42	45	47	50	56	47	50	56
Corn 25% - 15%	53	58	63	53	58	63	68	74	79	79	84	89	95	105	89	95	105
Corn 20% - 15%	96	105	115	96	105	115	124	134	143	143	153	162	172	191	162	172	191

The technical data presented in this document are indicative and may be changed by the manufacturer without notice. They are obtained assuming an outside temperature of 15°C and a relative humidity of 70%. Indicative production estimates based on an operating air temperature of 125°C (non-binding). These figures are dependent on environmental conditions, variety, quality characteristics, and the degree of impurity of the grain to be dried.