

NET512 — Weekly Practical


NAME	Christiaan van Wyk	WEEK	Week 6
STUDENT NO.	20261193	DATE	25 September 2026


Topology

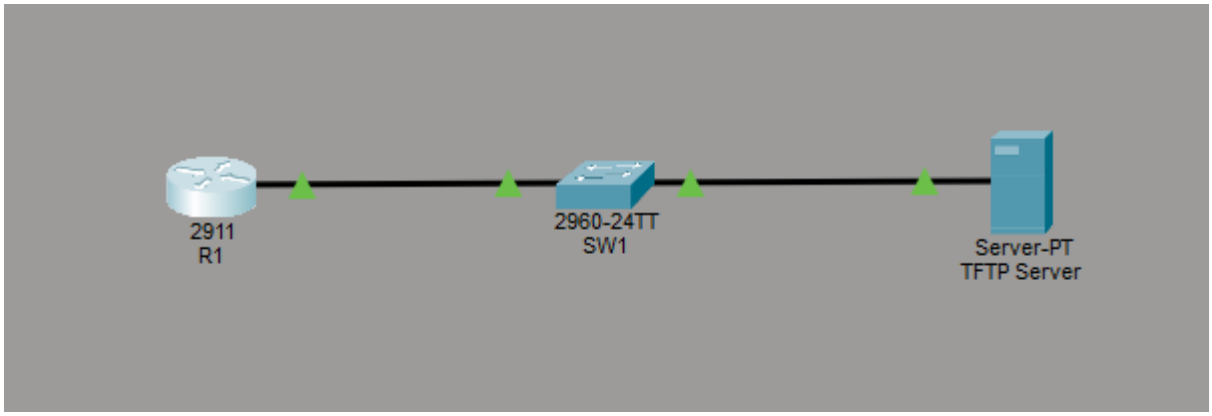

Task 48 — Configuration & Backup

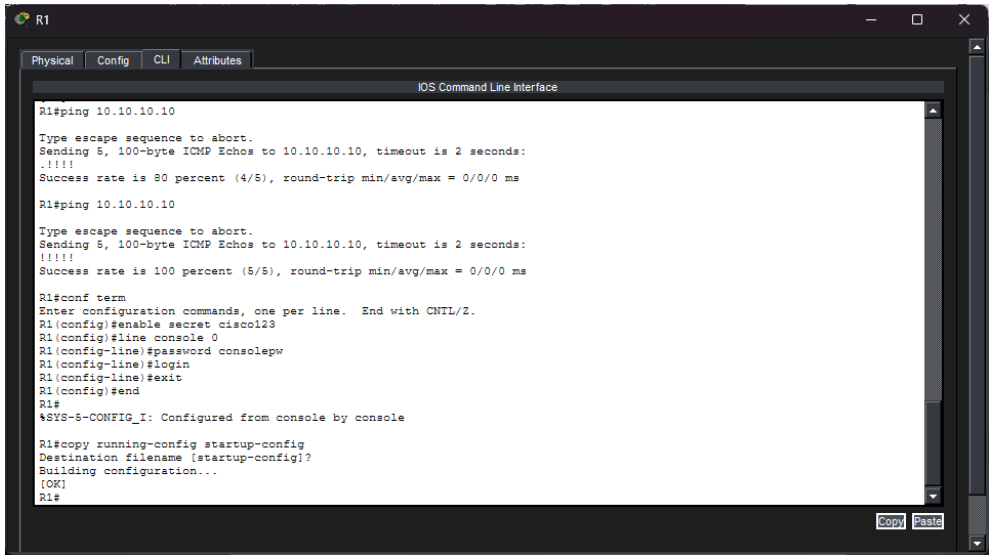

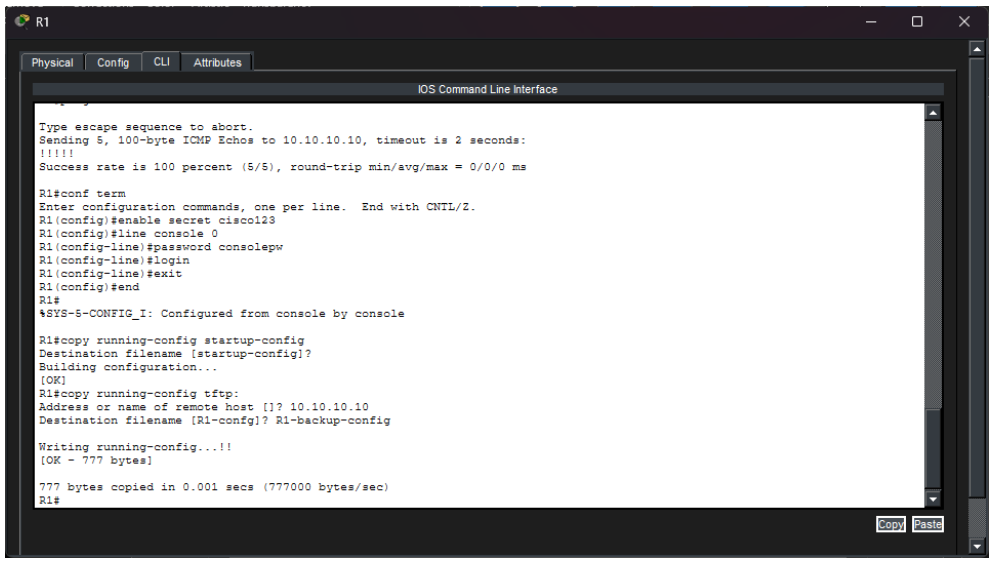

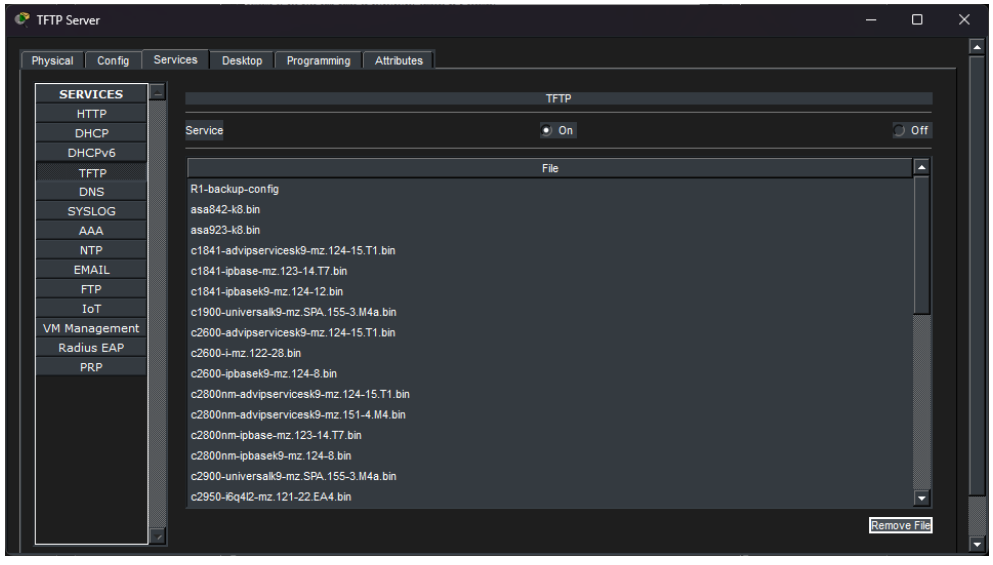


Christiaan van Wyk
20261193



R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console
R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [R1-confg]? R1-backup-config
Writing running-config...!!
[OK - 777 bytes]
777 bytes copied in 0.001 secs (777000 bytes/sec)
R1#show version | include System image
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
R1#show flash:
System flash directory:
File Length Name/status
3 33591768 c2900-universalk9-mz.SPA.151-4.M4.bin
2 28282 sigdef-category.xml
1 227537 sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)
R1#
Copy
Paste
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
777 bytes copied in 0.001 secs (777000 bytes/sec)
R1#show version | include System image
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
R1#show flash:
System flash directory:
File Length Name/status
3 33591768 c2900-universalk9-mz.SPA.151-4.M4.bin
2 28282 sigdef-category.xml
1 227537 sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)
R1#copy flash: tftp:
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]?
Writing c2900-universalk9-
mz.SPA.151-4.M4.bin...!!!

Task 49 — Password Recovery

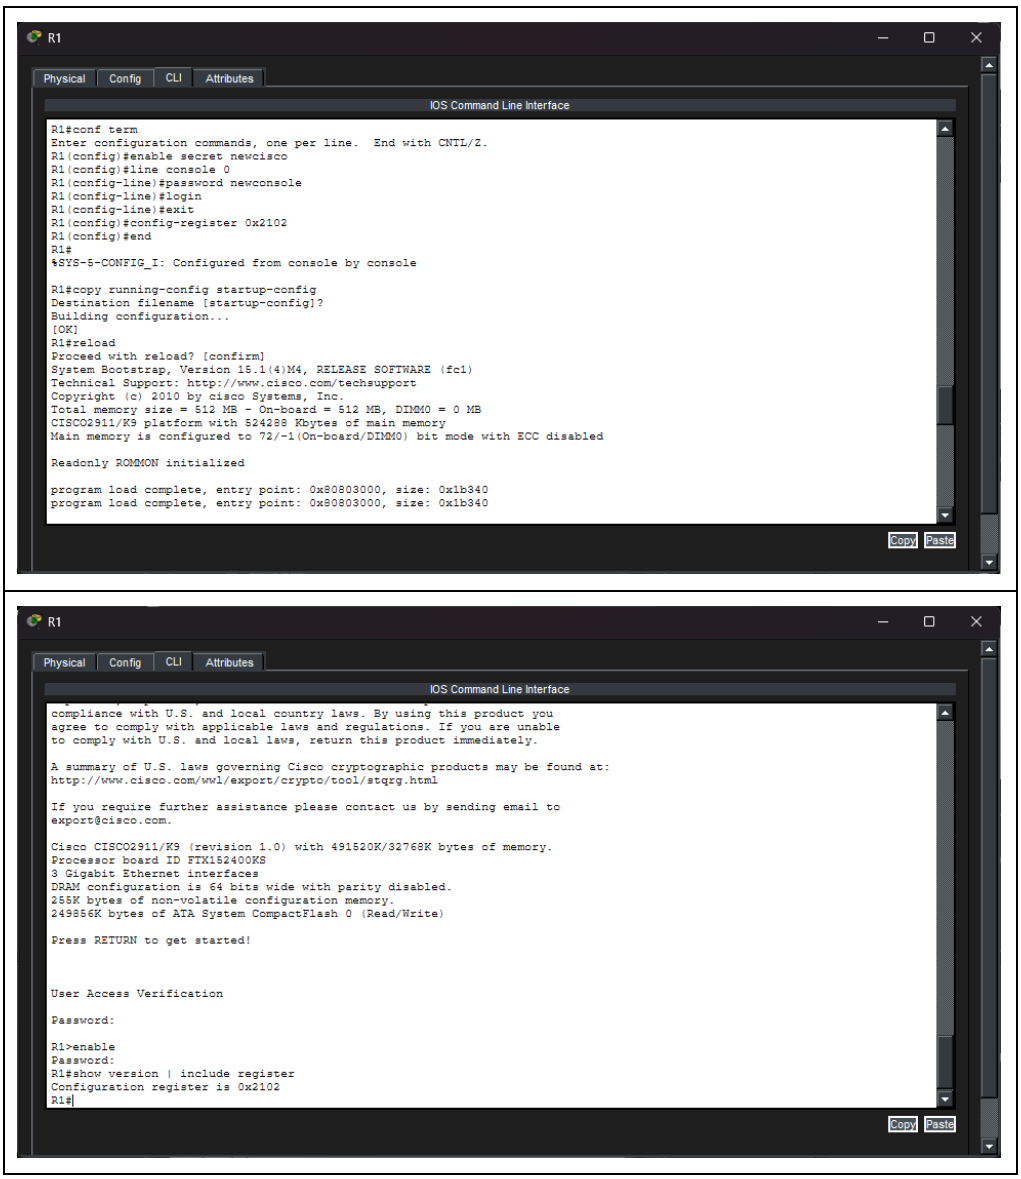



R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
R1#conf term
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#enable secret newcisco
R1(config)#line console 0
R1(config-line)#password newconsole
R1(config-line)#login
R1(config-line)#exit
R1(config)#config-register 0x2102
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console
R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#reload
Proceed with reload? [confirm]
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled
Readonly ROMMON initialized
program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340
Copy
Paste
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
Press RETURN to get started!
User Access Verification
Password:
R1>enable
Password:
R1#show version | include register
Configuration register is 0x2102
R1#
Copy
Paste

Task 50 — Factory Reset

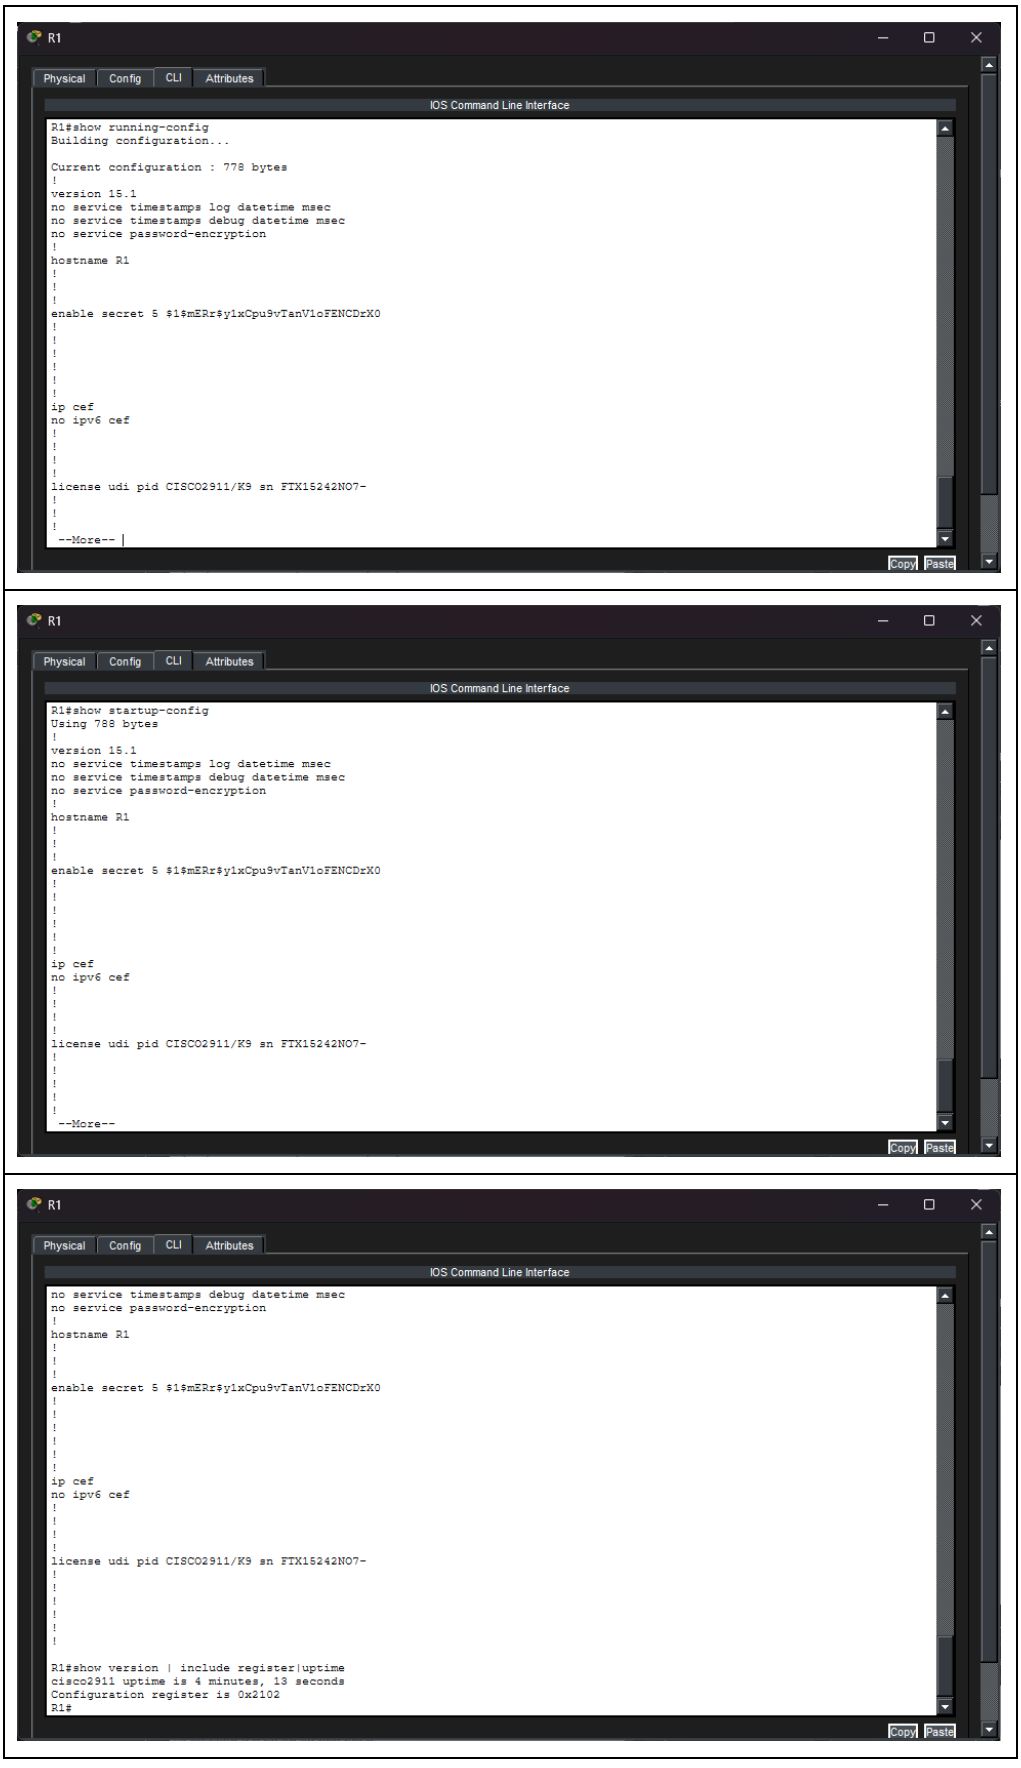


Christiaan van Wyk
20261193

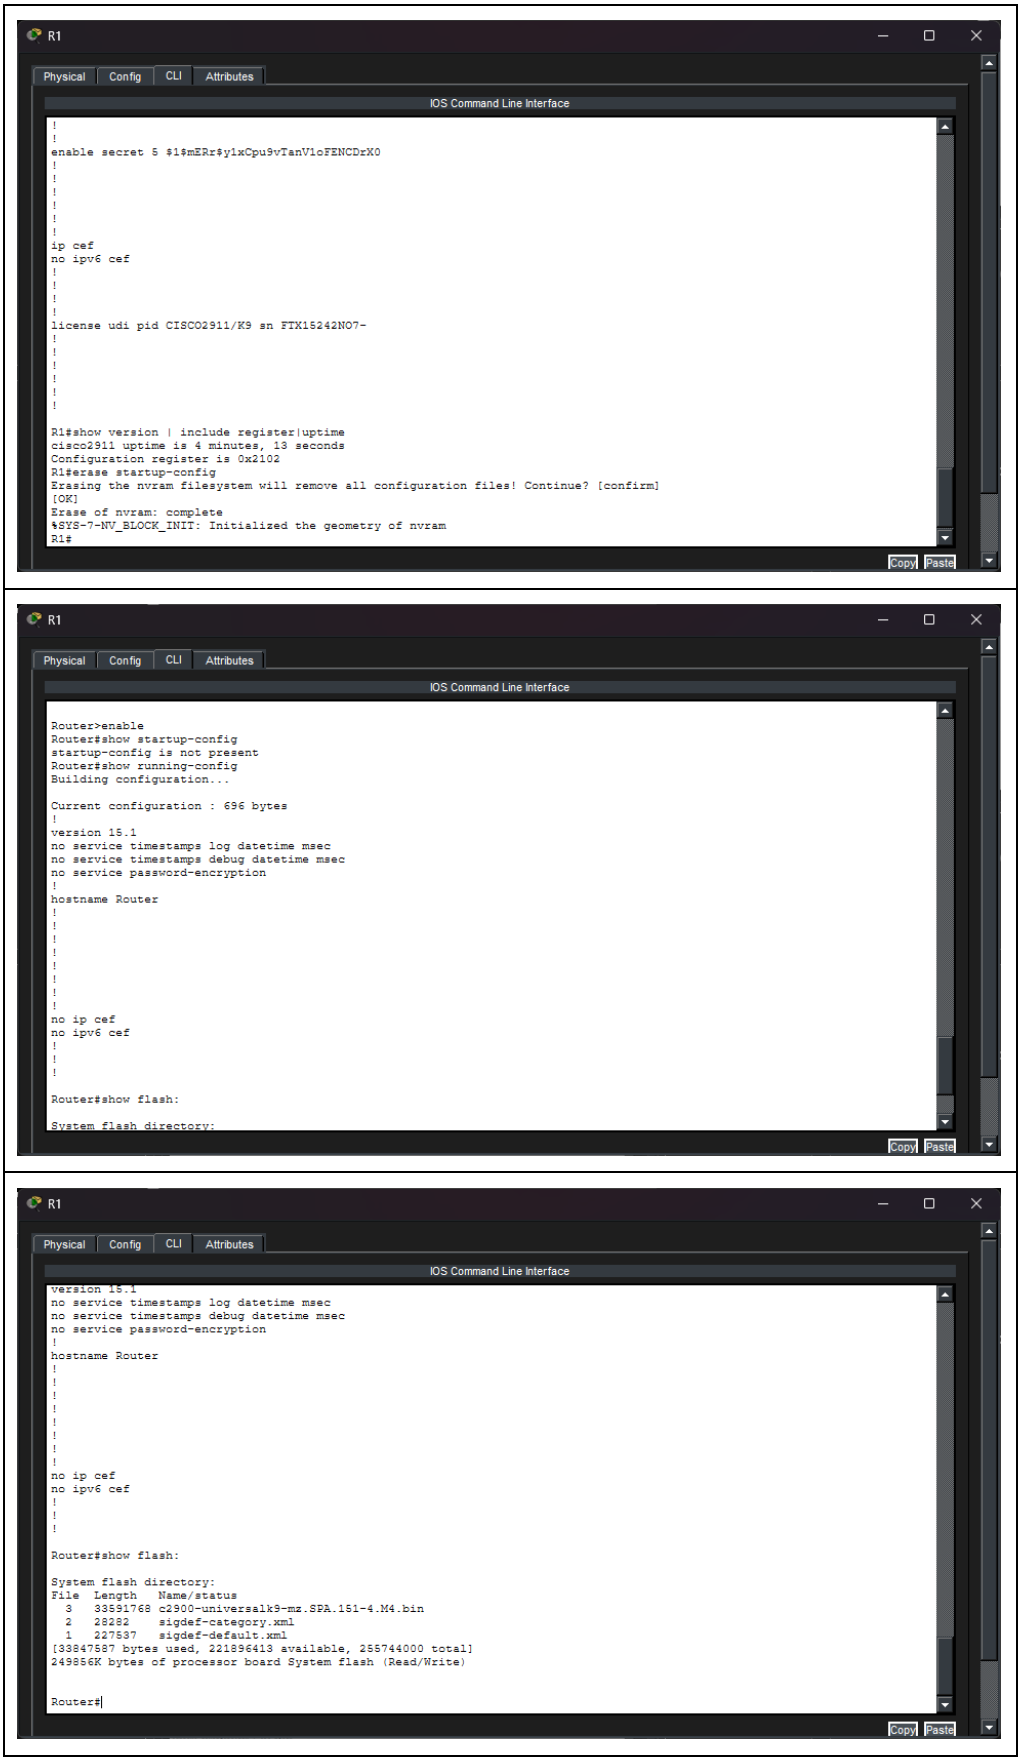
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
!
!
enable secret 5 1mERr$ylxCpu9vTanV1oFENCDrX0
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO2911/K9 sn FTX15242NO7-
!
!
!
!
!
!
R1#show version | include register|uptime
cisco2911 uptime is 4 minutes, 13 seconds
Configuration register is 0x2102
R1#erase startup-config
Erasing the nvram filesystem will remove all configuration files! Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
R1#
Copy
Paste
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router>enable
Router#show startup-config
startup-config is not present
Router#show running-config
Building configuration...
Current configuration : 696 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
!
no ip cef
no ipv6 cef
!
!
!
Router#show flash:
System flash directory:
Copy
Paste
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
!
no ip cef
no ipv6 cef
!
!
!
Router#show flash:
System flash directory:
File Length Name/status
3 33591768 c2900-universalk9-mz.SPA.151-4.M4.bin
2 28282 sigdef-category.xml
1 227537 sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)
Router#
Copy
Paste

Task 51 — Configuration & Backup



Christiaan van Wyk
20261193

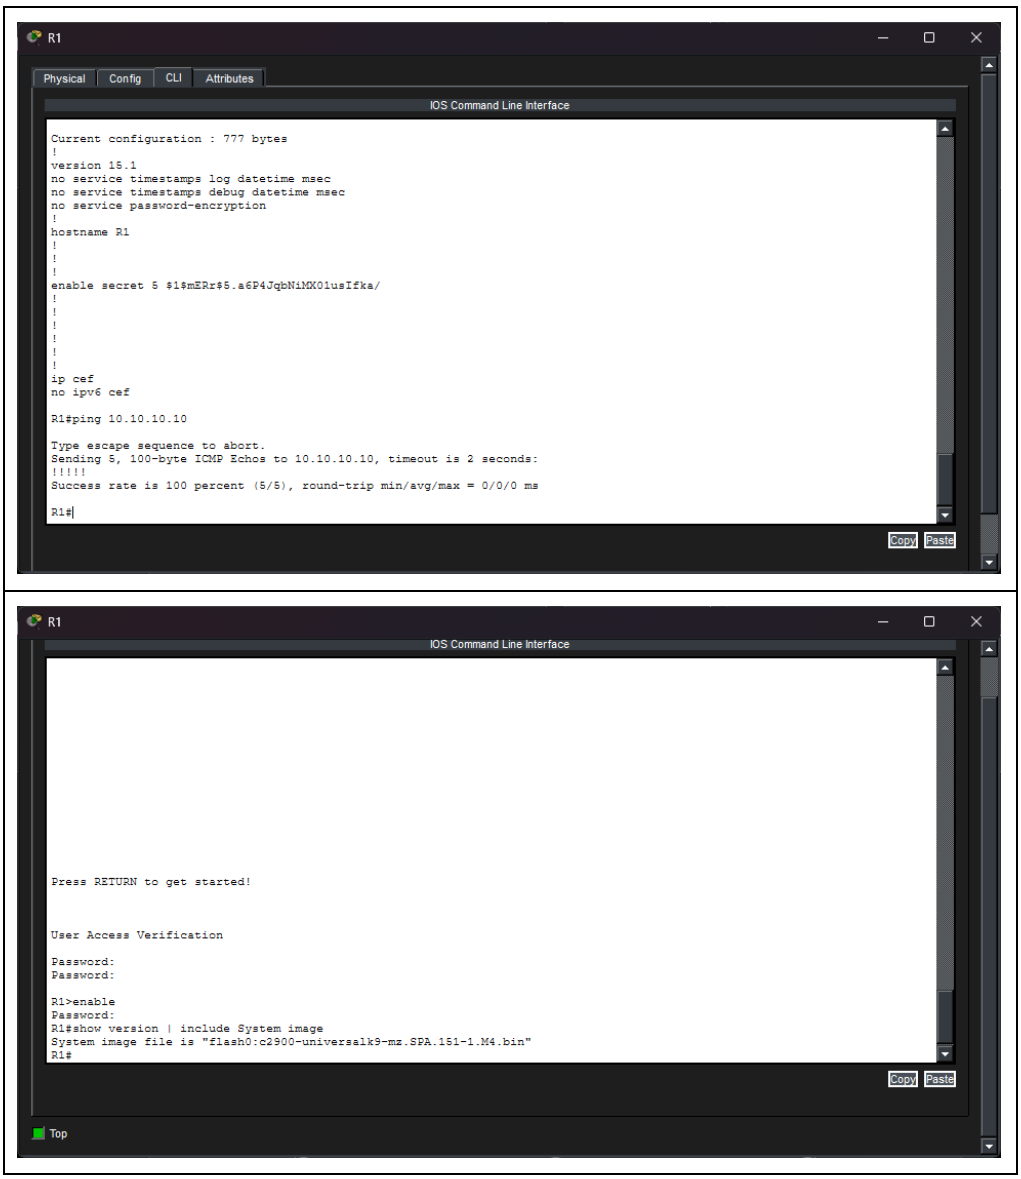
R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Current configuration : 777 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname R1
!
!
!
enable secret 5 1mERr$5.a6P4JqbNiMX01usIfka/
!
!
!
!
!
!
ip cef
no ipv6 cef
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms
R1#
Copy
Paste
R1
IOS Command Line Interface
Press RETURN to get started!
User Access Verification
Password:
Password:
R1>enable
Password:
R1#show version | include System image
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
R1#
Copy
Paste
Top