
M124 · RTO-144 CONNECTIONS

M124 - Preamplifier · series S400-LINE · 15 contacts, single row


REAR CONNECTOR

REAR VIEW · CARD EDGE · 15 CONTACTS

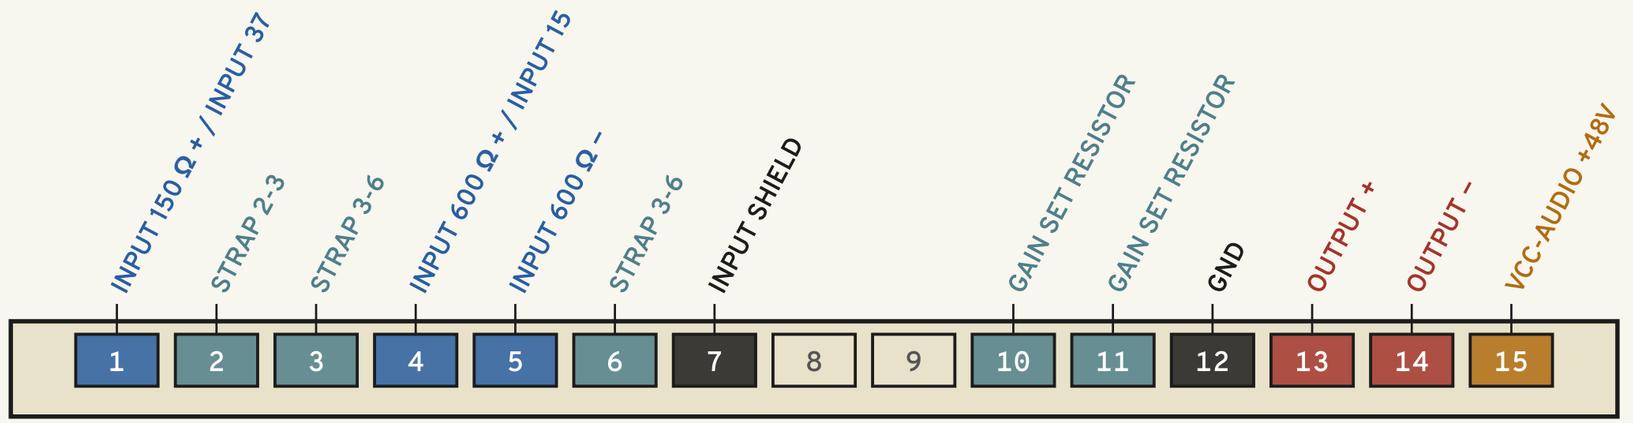

Input Output Power Ground / chassis Jumper

INPUTS AND OUTPUTS

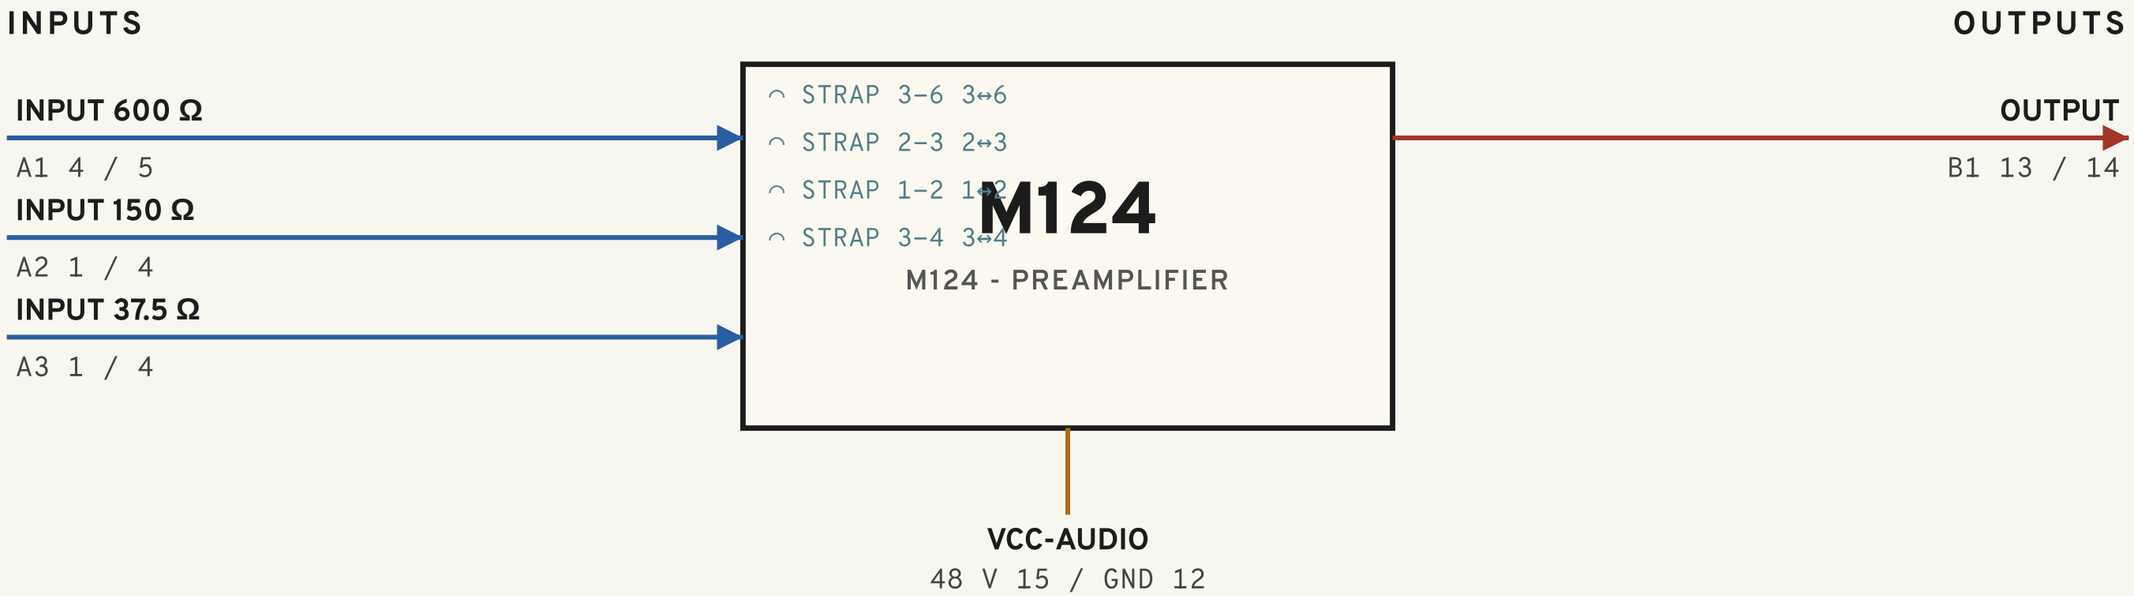

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	NOTE
A1	INPUT 600 Ω	in	4	5	strap 3-6; transformer phase reversal: pin 4 is high, pin 5 low
A2	INPUT 150 Ω	in	1	4	strap 2-3
A3	INPUT 37.5 Ω	in	1	4	straps 1-2 and 3-4
B1	OUTPUT	out	13	14	—

OTHER PINS

SIGNAL	PINS
INPUT SHIELD	7
GAIN SET RESISTOR	10, 11
COM	12

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	—	48	—	15	12	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
600 Ω input	STRAP 3-6	3	6
150 Ω input	STRAP 2-3	2	3
37.5 Ω input	STRAP 1-2	1	2
37.5 Ω input	STRAP 3-4	3	4

Source: Ward-Beck drawing 124-09-001 iss. 1 (Aug 1968), M124 connector wiring. Verify against the module before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M124 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 22 2026