
M467 · RTO-144 CONNECTIONS

DYMAMICS · series L-EFFECT · line in 600 Ω, out 600 Ω


REAR CONNECTOR

REAR VIEW · CARD EDGE · 22 CONTACTS

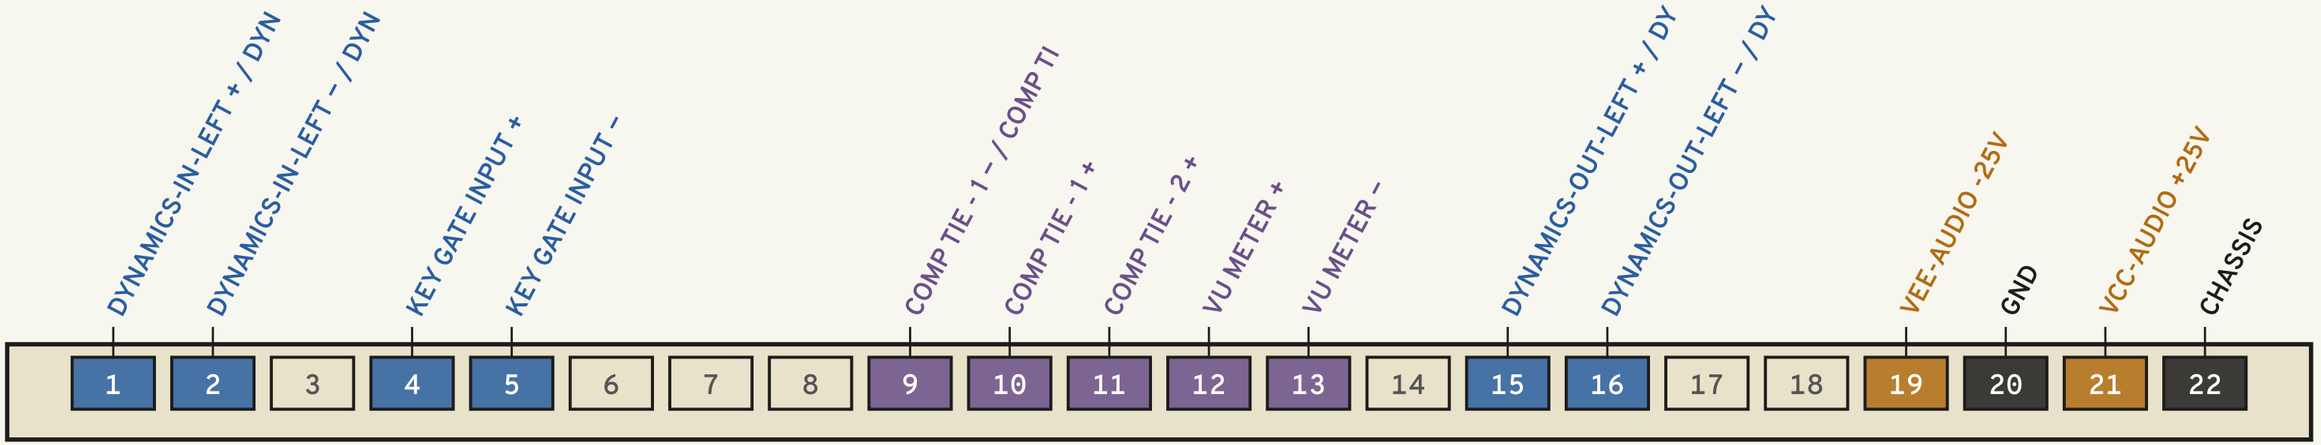

Input · Input / output · Power · Ground / chassis · Logic

INPUTS AND OUTPUTS

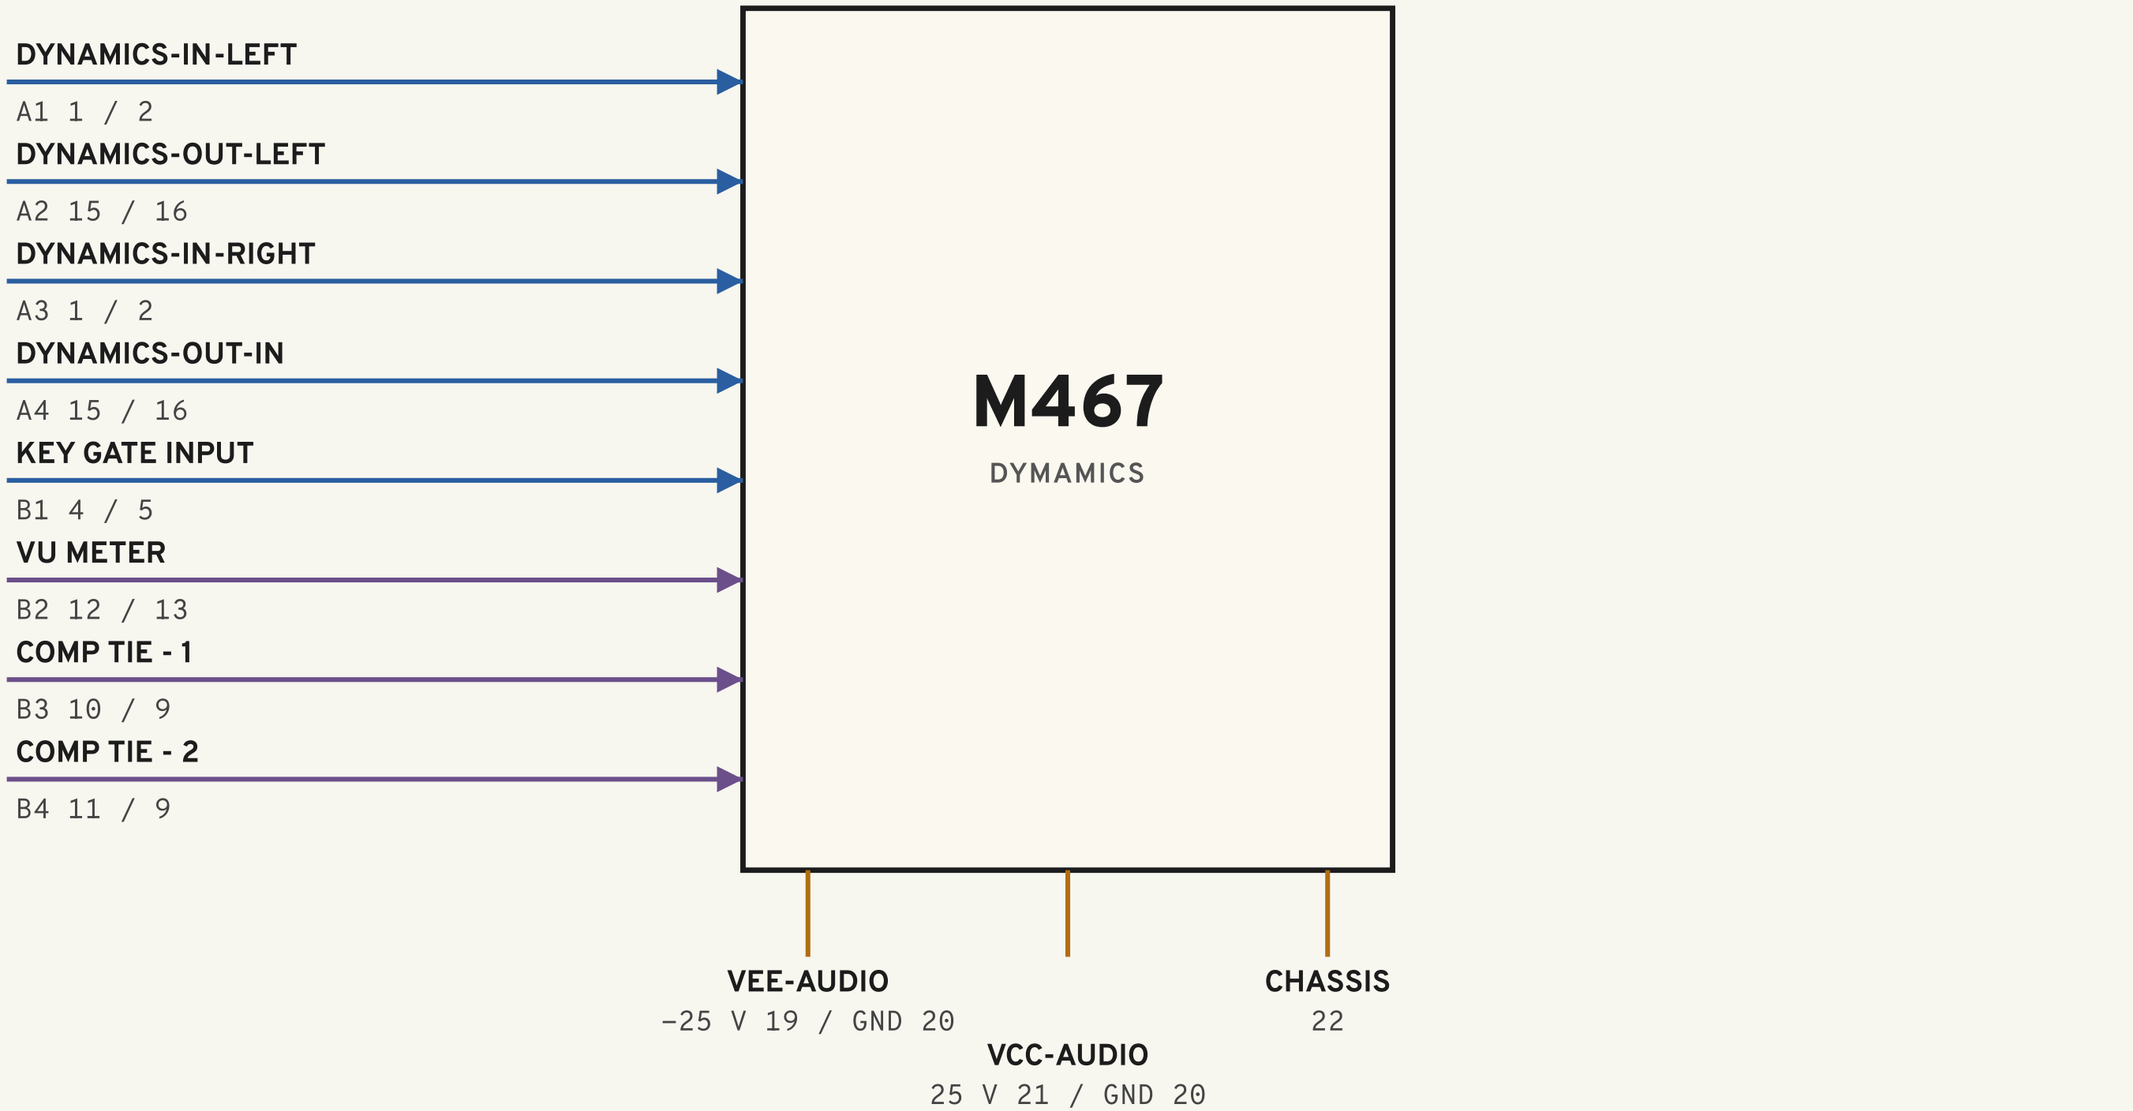

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Dynamics-IN-LEFT	in	1	2	1.A.1.P	2.A.1.N
A2	Dynamics-OUT-LEFT	in	15	16	15.A.2.P	16.A.2.N
A3	Dynamics-IN-Right	in	1	2	1.A.3.P	2.A.3.N
A4	Dynamics-OUT-IN	in	15	16	15.A.4.P	16.A.4.N
B1	Key Gate Input	in	4	5	4.B.1.P	5.B.1.N
B2	VU Meter	io	12	13	12.B.2.P	13.B.2.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.2	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
B3	COMP TIE - 1	io	10	9	10.B.3.P	9.B.3.N
B4	COMP TIE - 2	io	11	9	11.B.4.P	9.B.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M467 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026