

5KM Fiber Canister Data Sheet



Parameters:

Model No.		GFU-FC-OF01-5		Length		5,005M	
Fiber Diameter		0.27mm ±0.1		Fiber Type		G657A2	
Fiber Color		Clear		Fiber Weight		80g/km	
Fiber Connector		Default: FC; Optional ST/SC/LC		Working Temp.		(-40~+85) °C	
Attenuation							
1310nm				1550nm			
Value		≤0.35 dB/km		≤0.25 dB/km			
WT		0.329		0.185			
Fiber Canister							
Material		Size		Fiber+Canister Weight			
ABS Black		φ10*24 cm		489g			
Packing Dimension							
Individual Pack		31.0*17.0*14.5 cm			760g		
8pcs per Case Pack		64.0*35.0*32.0 cm			7120g		

10KM Fiber Canister Data Sheet



Parameters:

Model No.	GFU-FC-OF01-10		Length	10,005M
Fiber Diameter	0.27mm ±0.1		Fiber Type	G657A2
Fiber Color	Clear		Fiber Weight	80g/km
Fiber Connector	Default: FC; Optional ST/SC/LC		Working Temp.	(-40~+85) °C
Attenuation				
1310nm			1550nm	
Value	≤0.35 dB/km		≤0.25 dB/km	
WT	0.329		0.185	
Fiber Canister				
Material	Size		Fiber+Canister Weight	
ABS Black	φ12*32 cm		896g	
Packing Dimension				
Individual Pack		18.5*18.5*40 cm		G.W.: 1.46Kgs
6pcs per Case Pack		57*38*41 cm		G.W.: 10.5Kgs

15KM Fiber Canister Data Sheet



Parameters:

Model No.	GFU-FC-OF01-15		Length	15,005M
Fiber Diameter	0.27mm ±0.1		Fiber Type	G657A2
Fiber Color	Clear		Fiber Weight	80g/km
Fiber Connector	Default: FC; Optional ST/SC/LC		Working Temp.	(-40~+85) °C
Attenuation				
1310nm			1550nm	
Value	≤0.35 dB/km		≤0.25 dB/km	
WT	0.329		0.185	
Fiber Canister				
Material	Size		Fiber+Canister Weight	
ABS Black	φ12*32 cm		1460g	
Packing Dimension				
Individual Pack		18.5*18.5*40 cm		G.W.: 2.0Kgs
6pcs per Case Pack		57*38*41 cm		G.W.: 13.5Kgs

20KM Fiber Canister Data Sheet



Parameters:

Model No.	GFU-FC-OF01-20		Length	20,005M
Fiber Diameter	0.27mm ±0.1		Fiber Type	G657A2
Fiber Color	Clear		Fiber Weight	80g/km
Fiber Connector	Default: FC; Optional ST/SC/LC		Working Temp.	(-40~+85) °C
Attenuation				
1310nm			1550nm	
Value	≤0.35 dB/km		≤0.25 dB/km	
WT	0.329		0.185	
Fiber Canister				
Material	Size		Fiber+Canister Weight	
ABS Black	φ14*36cm		1950g	
Packing Dimension				
Individual Pack		19.0*19.0*43.0cm		G.W.: 2.4Kgs
6pcs per Case Pack		58.0*40.0*44.0 cm		G.W.: 16.0Kgs


30KM Fiber Canister Data Sheet



Parameters:

Model No.		GFU-FC-OF01-30		Length		30,005M	
Fiber Diameter		0.27mm ±0.1		Fiber Type		G657A2	
Fiber Color		Clear		Fiber Weight		80g/km	
Fiber Connector		Default: FC; Optional ST/SC/LC		Working Temp.		（-40~+85）℃	
Attenuation							
1310nm				1550nm			
Value	≤0.35 dB/km			≤0.25 dB/km			
WT	0.329			0.185			
Fiber Canister							
Material		Size		Fiber+Canister Weight			
ABS Black		φ14*36cm		2368g			
Packing Dimension							
Individual Pack		19. 0*19. 0*43. 0cm			G.W.: 3.4Kgs		
4pcs per Case Pack		58. 0*40. 0*44. 0 cm			G.W.: 15.1Kgs		


FPV Optical Fiber



Transmitter / Sky Module



Receiver / Ground Module



Video Data Converter

Optical Signal Transmitter (TX)

Input Power	5-9 V
Interfaces	UART and Video 1.25mm 6P
Video Protocols	PAL / NTSC 1.25mm 6P
Control Protocol	CRSF
Transmission Distance	25km / 40km
Wavelength	1310nm / 1550nm
Dimensions	40*45*12mm
Weight	20g

Optical Signal Receiver (RX)

Input Power	4S - 6S with XT60
Interfaces	Video BNC RCA
Video Protocols	PAL / NTSC
Protocol	Overall system
Max Distance	>25km
Wavelength	1310nm / 1550nm
Dimensions	81*63*25mm
Weight	65g

Video Data Converter


Appearance	JR Warehouse
Protocol	Ethernet port
Video Output Interface	2
Dimensions	60*50*32mm
Weight	30g

FPV Optical Fiber High Version


Fiber Optic Spool



Flight Controller

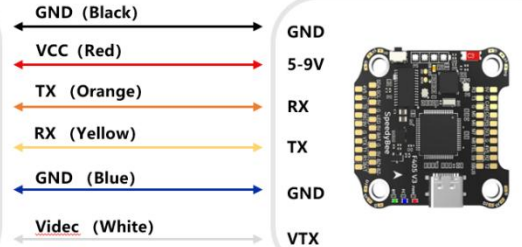

Ground Module



5.8G wireless data transmission

2.4G wireless remote control



GROUD UNIT



Sky Module



Video Data Converter for Flight Controller



Type1 Fiber Spool with External Sky Module



Type2 Fiber Spool with Embedded Sky Module



