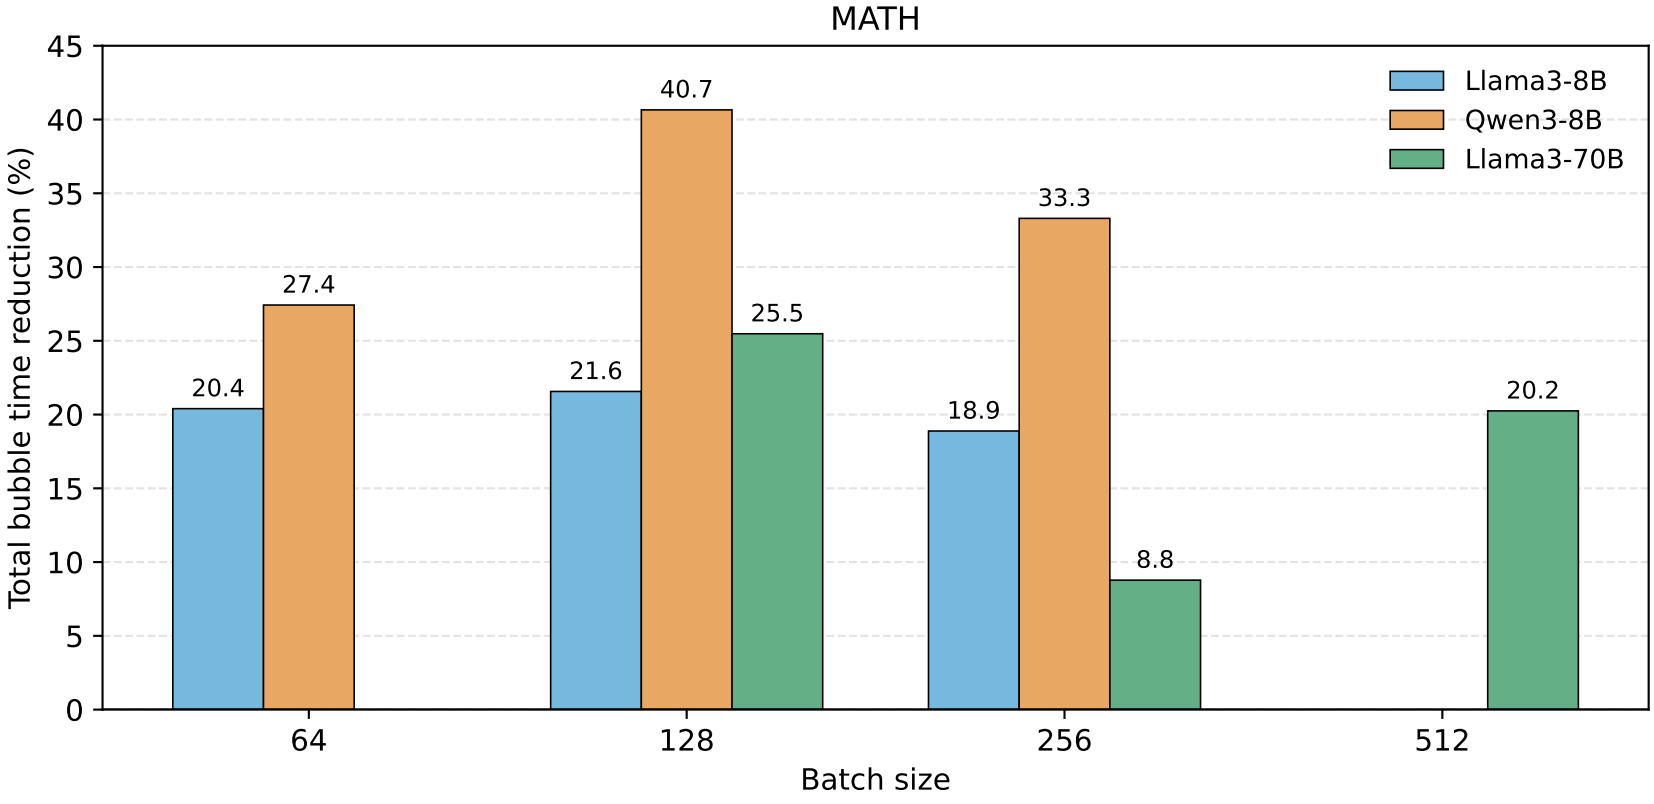

Full-run inter-batch gaps on middle stages; selected frequency minimizes energy within 5% of Auto time.