


- 1. MATERIAL: 4140 28-32 ROCKWELL PRE-HARD
- 2. GAS NITRIDE SURFACE 50-55 ROCKWELL. DEPTH 0.010" - 0.015"
- 3. POLISH TO MIRROR FINISH RA: 4-8

MIN FOS BENDING		
	AGMA 10	AGMA 12
ROCKWELL 50	1.29	1.51
ROCKWELL 55	1.45	1.69

MIN FOS WEAR		
	AGMA 10	AGMA 12
ROCKWELL 50	0.95	1.05
ROCKWELL 55	1.08	1.19

INVOLUTE SPUR GEAR
24 DIAMETRAL PITCH
25 DEG PRESSURE ANGLE
90 TEETH

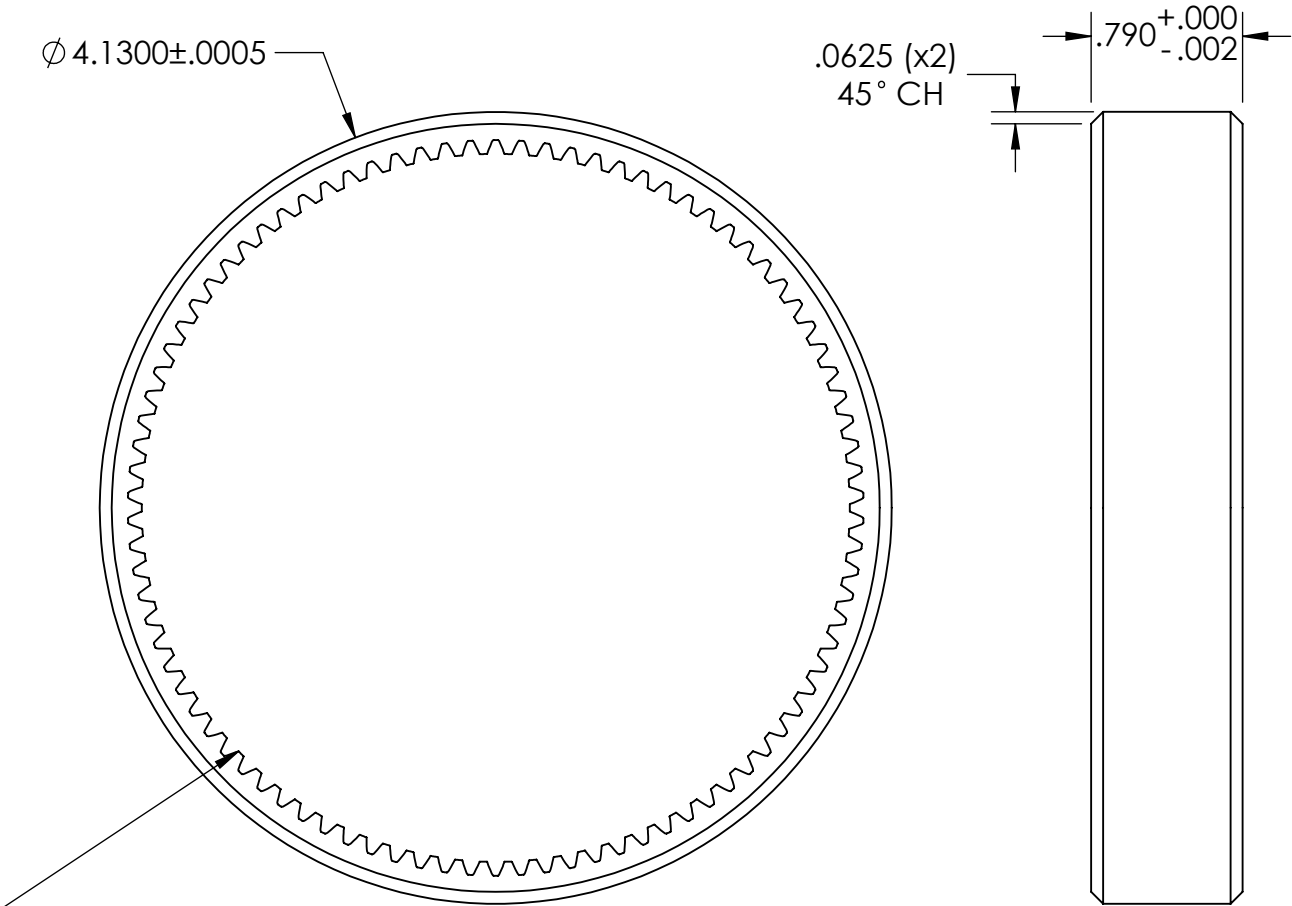

NOTES:
FOR ANY QUESTIONS,
PLEASE CONTACT TRISTAN HINOUL:
PHONE: (908) 420 - 4258
EMAIL: hinoul@go.uwracing.com

SCALE: 1:1
MATERIAL
4140 Prehard

TITLE:
RING SPUR GEAR (INCH) QTY:5
SIZE UW -MADISON PART NUMBER
A 220e-320-05 Ring Gear
WEIGHT: LBS SHEET 1 OF 1

