

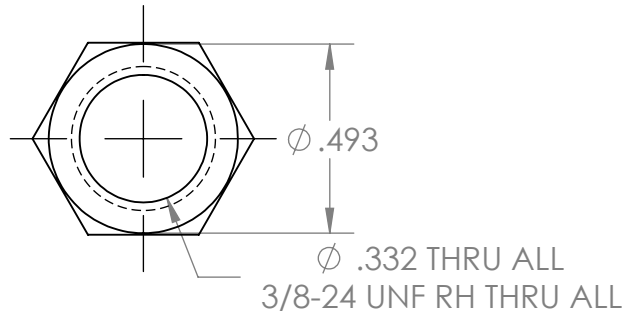


NOTES:

1. USE 9/16 HEX STOCK
2. RIGHT HAND THREADS
3. TEST TAP QUALITY WITH BOLT
4. FACE OR SAND HEX END

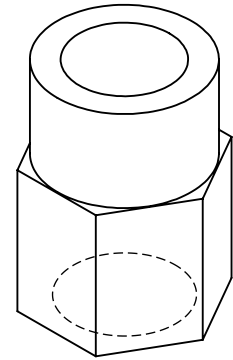

Drawn: A.Kofman	2022-01-31	Default Tolerances:  X.X: ±0.050 X.XX: ±0.010 Angles: ±1°	QTY: 10	SCALE: 2:1	TITLE: Adjustment Bolt Insert RH	
Checked: A.Bruss	2022-01-31		MATERIAL  Mild Steel		SIZE	UW -MADISON PART NUMBER
Contact: Alexander Kofman	akofman@wisconsinracing.org				<b>A</b>	223-11-17-B
					ALL UNITS ARE IN: XXX	
						SHEET 1 OF 1