
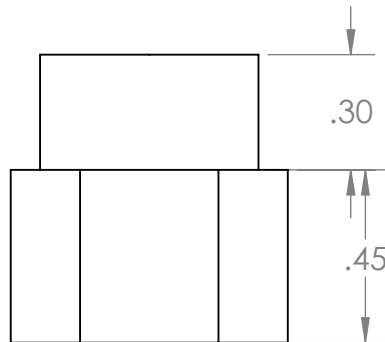
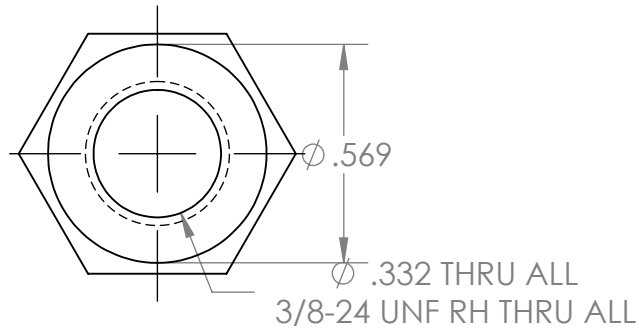


NOTES:

1. USE 5/8 HEX STOCK
2. RIGHT HAND THREADS
3. TEST TAP QUALITY WITH BOLT
4. FACE OR SAND HEX END

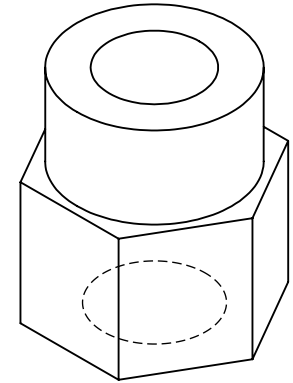

|  |            |   |                       |            |                                  |                                      |
|--|------------|---|-----------------------|------------|----------------------------------|--------------------------------------|
| Drawn: A.Kofman  | 2022-03-19 | Default Tolerances:<br>X.X: $\pm 0.050$<br>X.XX: $\pm 0.010$<br>Angles: $\pm 1^\circ$ | QTY: 10               | SCALE: 2:1 | TITLE: Adjustment Bolt Insert RH |                                      |
| Checked: C.Mangiulli                                     | 2022-03-19 |   | MATERIAL: Mild Steel  |            | SIZE: A                          | UW -MADISON PART NUMBER: 223-11-17-B |
| Contact: Alexander Kofman<br>akofman@wisconsinracing.org |            |   | ALL UNITS ARE IN: XXX |            | SHEET 1 OF 1                     |                                      |