

## NOTES:

- USE 9/16 HEX STOCK
- 2.
- LEFT HAND THREADS
  TEST TAP QUALITY WITH BOLT
  FACE OR SAND HEX END 3.



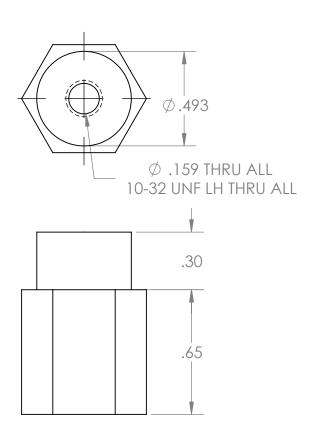



|  | Drawn: A.Kofman             | 2022-01-31 | Default Tolerances: | OTY: 4     | SCALE: 2:1 | TITLE: | Rod End Insert LH       |              |
|--|-----------------------------|------------|---------------------|------------|------------|--------|-------------------------|--------------|
|  | Checked: A.Bruss            | 2022-01-31 |                     |            | 3CALL, 2.1 |        | KOG ENG INSCITEN        |              |
|  | Contact: Alexander Kofman   |            | X.XX: +().() ()     | MATERIAL   |            | SIZE   | UW -MADISON PART NUMBER |              |
|  | akofman@wisconsinracing.org |            |                     | Mild Steel |            | Α      | 223-15-17-B             |              |
|  |                             |            |                     |            |            | A      | ALL UNITS ARE INCHES    | SHEET 1 OF 1 |

**SOLIDWORKS Educational Product. For Instructional Use Only.** 

3

2