

**Technical University of Applied Sciences Würzburg-Schweinfurt
(THWS)**

Faculty of Computer Science and Business Information Systems

Master Thesis


Electric Motor Modelling via Graph Neural Networks

Submitted to the Technical University of Applied Sciences
Würzburg-Schweinfurt in the Faculty of Computer Science and Business
Information Systems to complete a course of studies in Master of Artificial
Intelligence

Lilly Abraham
K64889

To be Submitted on: 11.12.2024

Initial examiner: Prof. Dr. Magda Gregorova
Secondary examiner: Prof. Gracia Herranz Mercedes

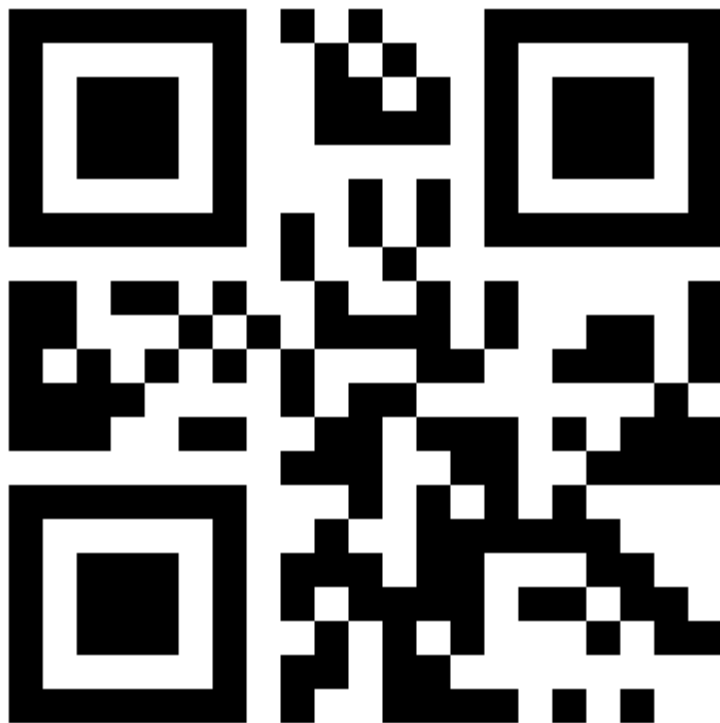

Abstract

The thesis explores an approach to predict KPIs of topology invariant IPSM Electric Motors by transforming its geometric, physical and simulation parameters into a graph representation.

The KPIs to be predicted are plots on Efficiency grid(3D) and Torque curve(2D).

We aim to first parameterize the EM design such that it is feasible to convert into a graph representation.

Next, we would create a Graph with relevant attributes and design a GNN with the graph as input and the plots in the format of vectors as target values.

Additionally we may also need to customize the loss function in a way that would smoothen out the plot curves of the prediction values.

Then, we would evaluate the predictions with the test target values by experimenting with various hyperparameter tuning settings and as a baseline with an MLP model of the parameters in tabular form.

Finally we will enable the KPI's plot visualisation in a manner presentable to the client Valeo(Automaker Company).

Abstrakt

The aim of the Master Thesis is to train a neural network to learn the parameters of Electric Motors and thus be able to predict its KPIs. The KPIs are 2D and 3D plots on Torque(Mgrenz) curve(Mgrenz) and Efficiency grid(ETA). Other KPIs can be calculated from these two KPIs. For instance the Vibration Costs are inversely proportional to the Efficiency values predicted.

Acknowledgement

I would like to thank my supervisor Prof. Dr. Magda Gregorova for her guidance and support throughout the course of this thesis and Valeo for providing the data. Special thanks to Mr Daniel and Leo for sharing valuable insights of the data from a electromechanical standpoint.

Contents

Abstract	2
Acknowledgement	3
Contents	4
Abbreviations	5
Introduction	6
Literature Review	8
Dataset	9
Modelling	13
Experiments and Results	14
List of Figures	17
List of Tables	18
Appendix	19
Bibliography	20
Declaration on oath	21
Consent to Plagiarism Check	22

Abbreviations

GNN : Graph Neural Network

MLP : Multi Linear Perceptron

GNN : Graph Neural Network

KPI : Key Performance Indicator

EM : Electric Motor

FEM : Finite Element Method

CNN : Convolution Neural Network

2D : 2 Dimension

3D : 3 Dimension

Introduction

In the design of electric motors vast amounts of data are generated to determine which design of an EM fits best to KPIs.

KPIs of an Electric Motor are essential to judge the performance of the motor before it is manufactured. Traditionally these KPIs are inferred from a description of an EM design via a FEM approximating the solutions of the Maxwell's equations. This process, though well established in the EM design, is very time consuming and does not allow for high-throughput engine design optimization.

The actual engine data of Valeo is used here as the dataset comprising of multiple variant designs of the Double-V topology.

The 3 motor topologies manufactured by Valeo are as below:




Figure 1: V1 Magnet(Source:Valeo)




Figure 2: V2 Magnet(Source:Valeo)

This master thesis explores a way to do surrogate modelling of the current process as is highlighted in Figure 4 by making use of GNN/MLP for the modelling of electrical engine designs described parameterically.

The thesis is structured to follow sections namely Literature Review, Dataset, Modelling, Experiments and Results, Conclusion, Appendix and Bibliography.

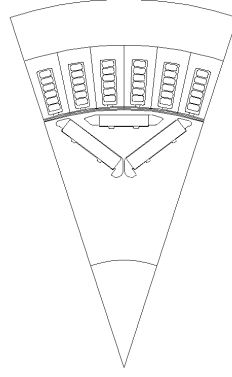


Figure 3: Nabla Magnet(Source:Valeo)

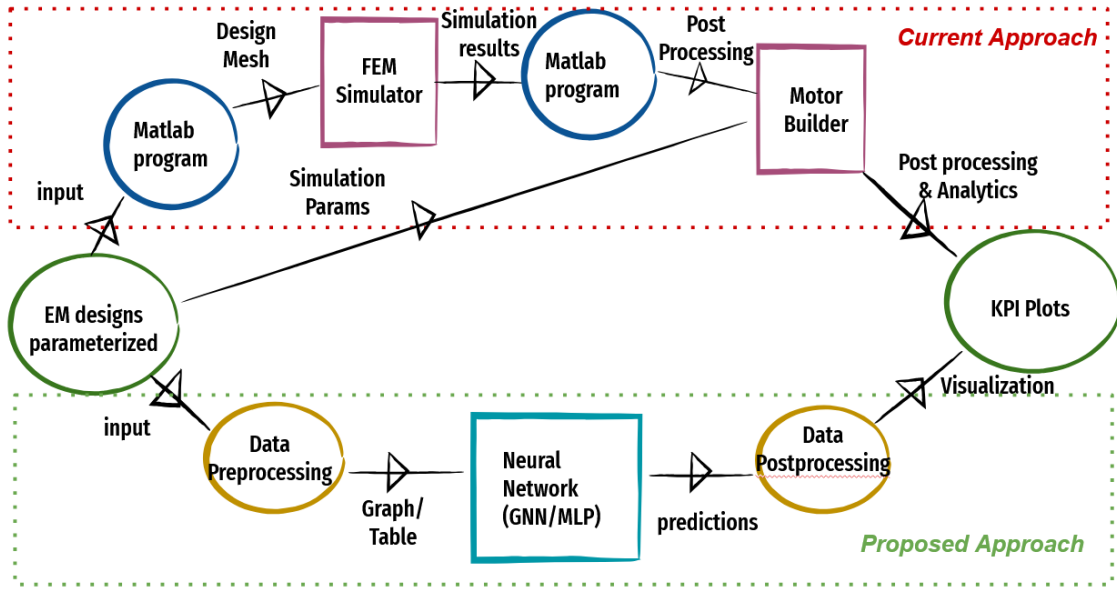


Figure 4: EM Design Flowchart

The Literature Review section will cover the related works that has been done in this domain. In the Dataset section a detailed insight to how our data is structured is given. In the Modelling section, the methodologies used to tackle the problem will be further elaborated on. The Experiments and Results chapter will give insight on the outcomes of our work in addition to other findings we unearth. Conclusion chapter would summarize the entire thesis briefly and would also give a small glimpse into areas of improvement. Finally the Bibliography section lists out the articles cited for this thesis.

Literature Review

There has been extensive research in modeling the Electric Motor with CNN based on the images of the motor cross-section. However our approach is progressive in the sense that once the KPIs are predicted we would like to be able to generate the inputs and generating images is not ideal for our usecase. Instead by generating the parameters of the motor we can be rest assured of more precise results. Hence the need to focus on the inputs as they are with their parametric description. Literature also covers works on modelling this work as tabular data using MLPs. Although this is fairly good forseeing the impact of generating the inverse process yet MLPs cannot necessarily learn all the intricacies within motor components. Hence the need to better represent the data typically in the form of graphs and model Graph Neural Networks to achieve the desired results. There has been close to no work of GNNs in this domain. Although we see progress of GNNs in molecular chemistry, social networks usecases from which we draw inspiration from.

Dataset

Valeo an automotive company has supplied the dataset consisting of close to 1500 Double V Electric Motor parameters. There are close to 196 parameters which comprises of the geometric, physical and simulation properties of the motor.

The geometry of a whole Double V motor is as below

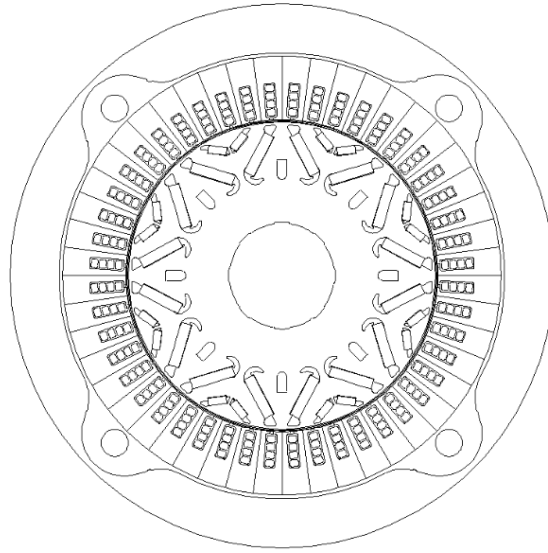


Figure 5: Complete EM Geometry(Source:Valeo)

Below is the geometry of 1/8 cross-section of the same motor.

- T : Topology type of the EM
- V : Type of Magnet

As Valeo only manufactures Double V magnets we consider it to be 2

Edge types

1. Angle

Relevant Paths

$$vm - -vm = \{v_{i_1}m_{j_1} - v_{i_2}m_{j_2}\} \forall i_1, i_2 \in \{1, \dots, T\}, \quad \forall j_1, j_2 \in \{1, \dots, V\} \mid i_1 = i_2, \quad j_1 \neq j_2$$

$$\text{angle} = vm - vm$$

2. Distance

Relevant Paths

$$vi - -vi = \{v_{i_{j_1}} - v_{i_{j_2}}\}, \forall i \in \{1, \dots, T\}, \forall j_1, j_2 \in \{1, \dots, V\} \mid j_1 \neq j_2$$

$$vi - -vj = \{v_{i_{1j}} - v_{i_{2j}}\}, \forall i_1, i_2 \in \{1, \dots, T\}, \forall j \in \{1, \dots, V\} \mid i_1 \neq i_2$$

$$v - -vm = \{v_{ij} - v_{im_j}\} \forall i \in \{1, \dots, T\}, \quad \forall j \in \{1, \dots, V\}$$

$$v - -rr = \{v_{ij} - r_r\}, \forall i, j \in \{1, \dots, T\}$$

$$o - -r = \{(o - r_r), (o - r_a)\}$$

$$rr - -s = \{r_r - s_i\}, \forall i \in \{1, \dots, QSim\}$$

$$s - -sw = \{s_i - s_{iw_j}\}, \forall i \in \{1, \dots, QSim\}, \forall j \in \{1, \dots, N\}$$

$$s - -ra = \{s_i - r_a\}, \forall i \in \{1, \dots, QSim\}$$

$$sw - -sw = \{s_{iw_{j_1}} - s_{iw_{j_2}}\}, \forall i \in \{1, \dots, QSim\}, \forall j \in \{1, \dots, N\} \mid (j_1 == j_2 - 1)$$

$$\text{distance} = vi - vi + vi - vj + v - vm + v - rr + o - r + rr - s + s - sw + s - ra + sw - sw$$

Node Features

1. $\mathbf{v} = \{\text{lmsov}, \text{lth1v}, \text{lth2v}, \text{r1v}, \text{r11v}, \text{r2v}, \text{r3v}, \text{r4v}, \text{rmt1v}, \text{rmt4v}, \text{rlt1v}, \text{rlt4v}, \text{hav}\}$
2. $\mathbf{vm} = \{\text{mbv}, \text{mhv}, \text{rmagv}\}$
3. $\mathbf{r} = \{r\}$
4. $\mathbf{s} = \{\text{b_nng}, \text{b_nzk}, \text{b_s}, \text{h_n}, \text{h_s}, \text{r_sn}, \text{r_zk}, \text{r_ng}, \text{h_zk}\}$
5. $\mathbf{sw} = \{\text{bhp}, \text{hbp}, \text{rhp}\}$

Path Features

1. $\mathbf{vm - vm} = \{\text{deg_phi}\}$
2. $\mathbf{vi - vi} = \{\text{dsm}, \text{dsmu}\}$
3. $\mathbf{vi - vj} = \{\text{amtrvj}, \text{amtrvi}\}$
4. $\mathbf{v - vm} = \{\text{lmav}, \text{lmiv}, \text{lmov}, \text{lmuv}\}$
5. $\mathbf{v - r} = \{\text{amtrv}, \text{dsrv}\}$
6. $\mathbf{o - r} = \{r\}$
7. $\mathbf{rr - s} = \{\text{airgap}\}$
8. $\mathbf{s - sw} = \{\text{dhphp}\}$
9. $\mathbf{sw - sw} = \{\text{dhpng}\}$
10. $\mathbf{s - ra} = \{r_a - (r_i + h_n + h_zk)\}$

The heterogeneous graph that was constructed earlier is as below:

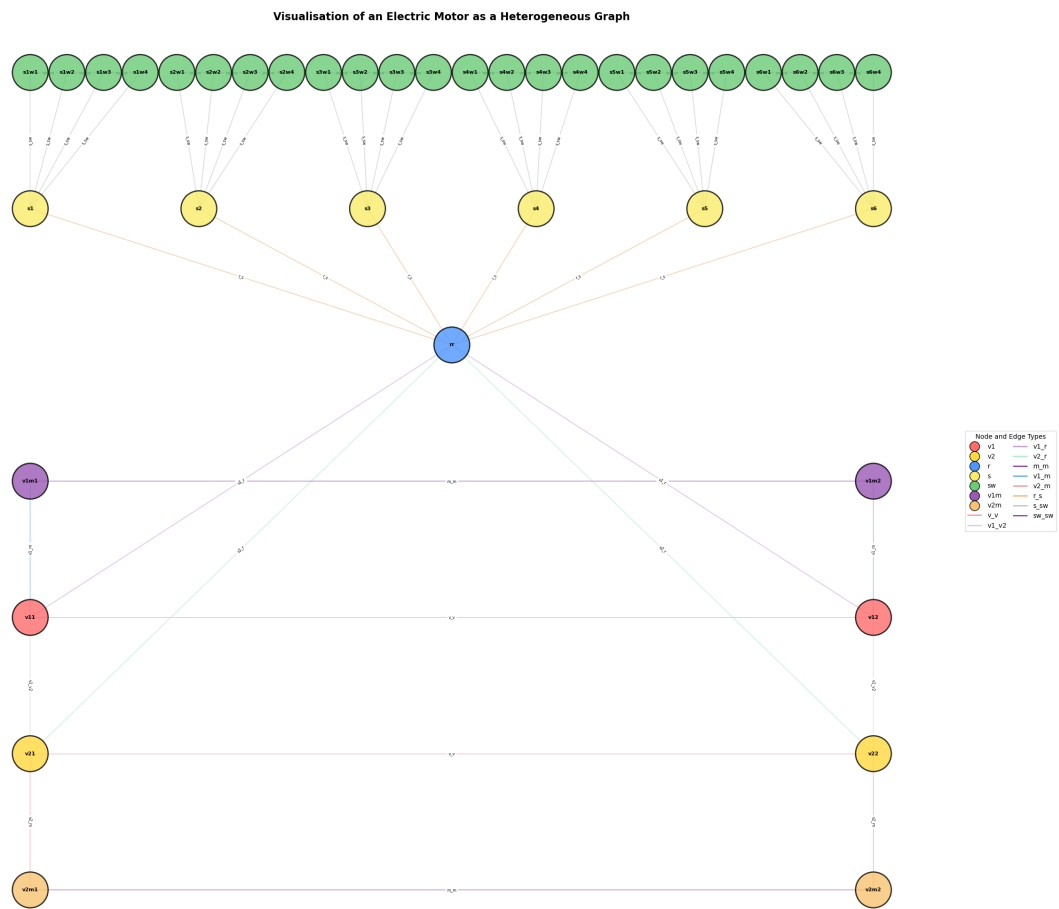


Figure 7: HetGraph

Modelling

Since we aim to predict continuous vector values, we model this task into a regression problem

We find the heterogeneous graph to be most apt for our use case with its different node and edge types. As it preserves both the structural and semantics of our data. Heterogeneous graph Neural Networks generally work by having separate non linear functions convolve over each edge type during message computation and over each node type when aggregating the learned information.

Experiments and Results

Firstly we train a MLP on the tabular representation of the data. We have used MinMax Scaler for normalization of both the input and targets. MSE loss function is used for the regression problem and Adam optimizer is used for optimization. We have the first results on the 2D KPI-Mgrenz prediction. These results are only considering about 400 examples. The dataset was split into training-validation(80:20) excluding test examples of about 19 examples.

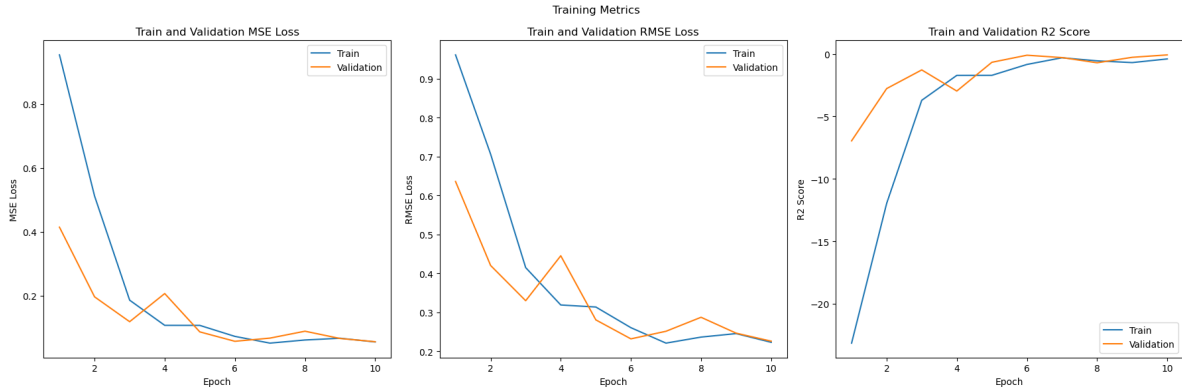


Figure 8: MLP Training Plots for 2D KPI(Mgrenz)

From the training plots we see that the model has converged after having run for 10 epochs with a learning rate of 0.0075.

The results of the MLP model from inference is as below:

We see a good fit of the model to the data with R2 score approaching close to 1. We have also enabled saving the trained model locally so it can be loaded on demand by the client to run inference.

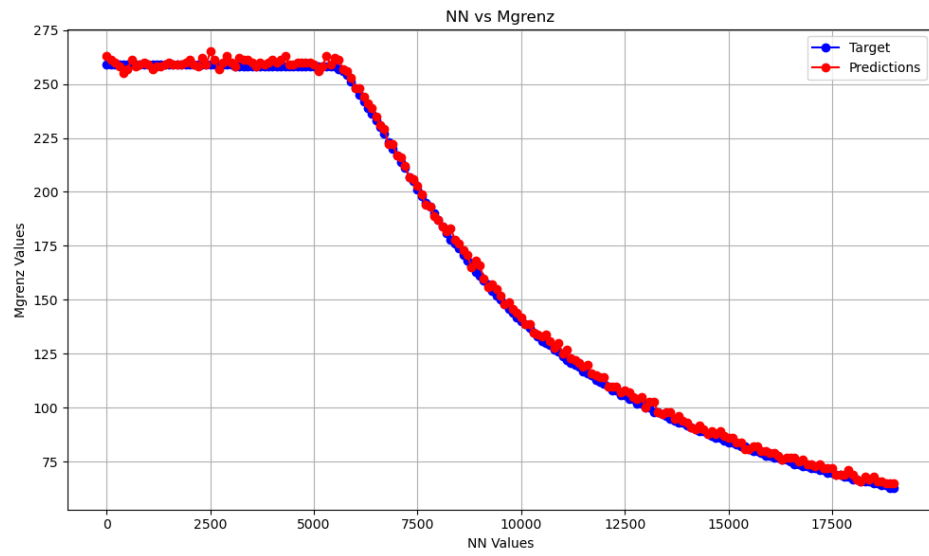


Figure 9: MLP Training Results for 2D KPI(Mgrenz)

Conclusion

List of Figures

1	V1 Magnet(Source:Valeo)	6
2	V2 Magnet(Source:Valeo)	6
3	Nabla Magnet(Source:Valeo)	7
4	EM Design Flowchart	7
5	Complete EM Geometry(Source:Valeo)	9
6	1/8 Motor Crossection	10
7	HetGraph	12
8	MLP Training Plots for 2D KPI(Mgrenz)	14
9	MLP Training Results for 2D KPI(Mgrenz)	15

List of Tables

Appendix

Bibliography

Declaration on oath

I hereby certify that I have written my master thesis independently and have not yet submitted it for examination purposes elsewhere. All sources and aids used are listed, literal and meaningful quotations have been marked as such.

Lilly Abraham K64889, 11.12.2024

Consent to Plagiarism Check

I hereby agree that my submitted work may be sent to PlagScan (www.plagscan.com) in digital form for the purpose of checking for plagiarism and that it may be temporarily (max. 5 years) stored in the database maintained by PlagScan as well as personal data which are part of this work may be stored there.

Consent is voluntary. Without this consent, the plagiarism check cannot be prevented by removing all personal data and protecting the copyright requirements. Consent to the storage and use of personal data may be revoked at any time by notifying the faculty.

Lilly Abraham K64889, 11.12.2024