KWIKFLO PUMP STATIONS & TRADE WASTE


General Purpose Pit Use, Design and Installation

Aline has a range of General Purpose Pits which allow sufficient retention time to provide the suspended solids time to settle to the bottom of the pit. This process allows the clean water to discharge to the sewer.

General Purpose Pits are commonly used to remove small quantities of free grease, oils and settle-able solids from commercial effluent streams. They are required by legislation in many areas.

Features & Benefits

- Easy installation with simple operation
- Lower service and operating costs
- Safe from vandalism, vehicle damage and theft
- Can be installed in conjunction with basement toilets and garbage bay drainage
- Requires single pump station
- Available in above ground model

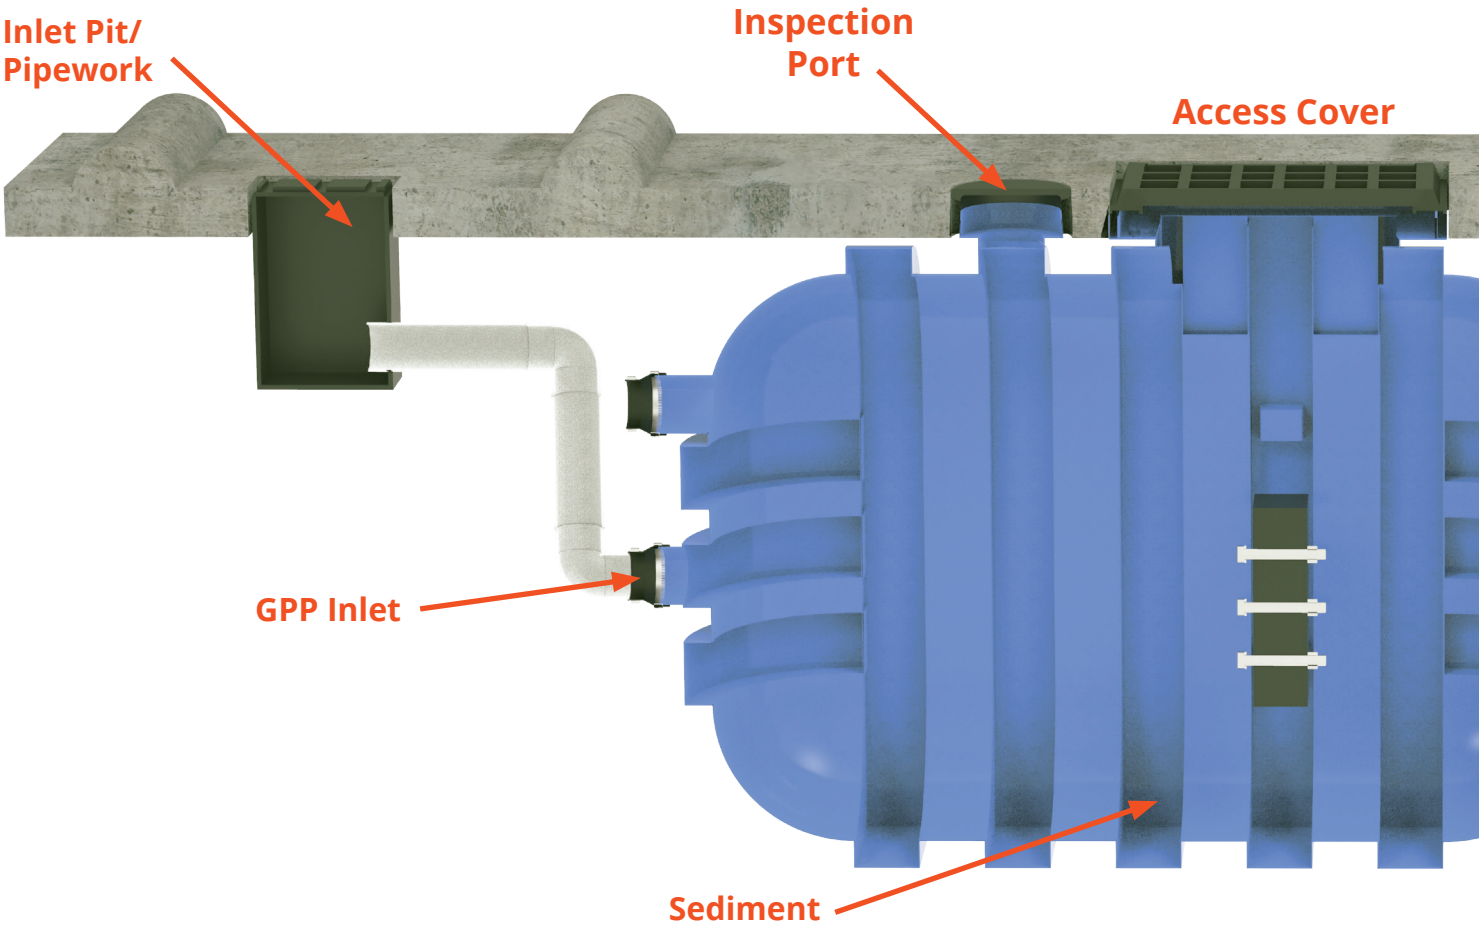


KWIKFLO PUMP STATIONS & TRADE WASTE

Sydney WATER

APPROVED
Listed pre-treatment for food businesses

Manufacturer	Supplier's item
Aline Pumps **1800 018 999**	AGPP-1000 (1,000 L) - fibreglass MPT/AGPP-1000 (1,000 L) - polyethylene MPT/AGPP-1500 (1,500 L) - polyethylene

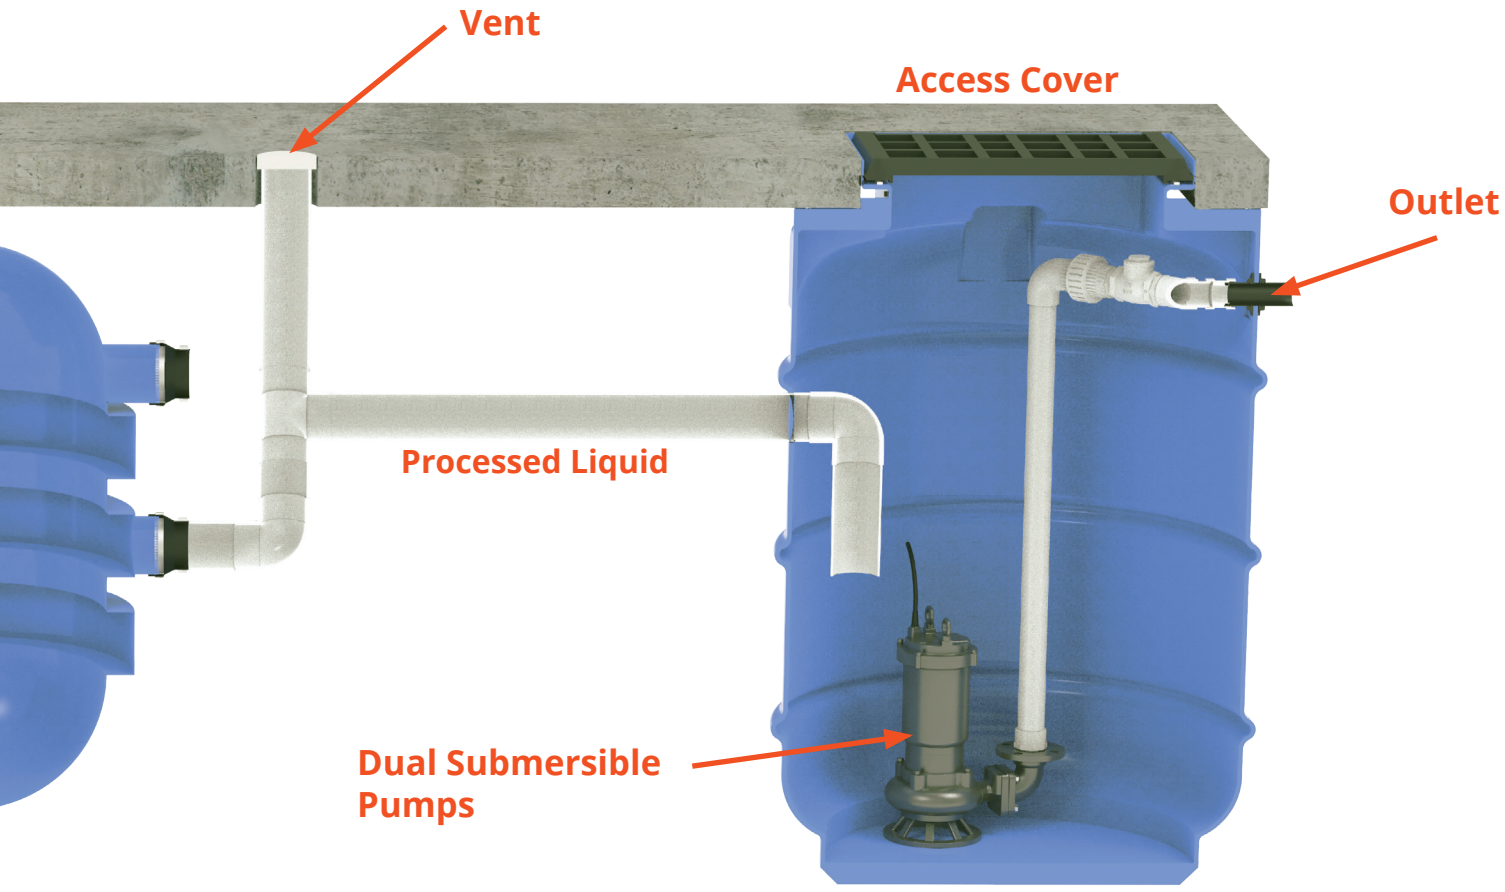

General Purpose Pits

1000L

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features & Benefits


CONSTRUCTION
- Polyethylene tank
- Inlet plumbing to be installed by plumber
- Risers available on request

LIQUID HANDLED
- Raw sewage, Trade waste, Effluent & Stormwater

APPLICATIONS
- Car Wash Bay
- Blocks of Units
- Town Houses
- Residential
- Commercial


Specifications


Volume	1000L
Length	2060mm
Width	710mm
Depth	1485mm
Manhole	600mm Square
Material	Polyethylene (Poly)
Installation	Above & Below Ground

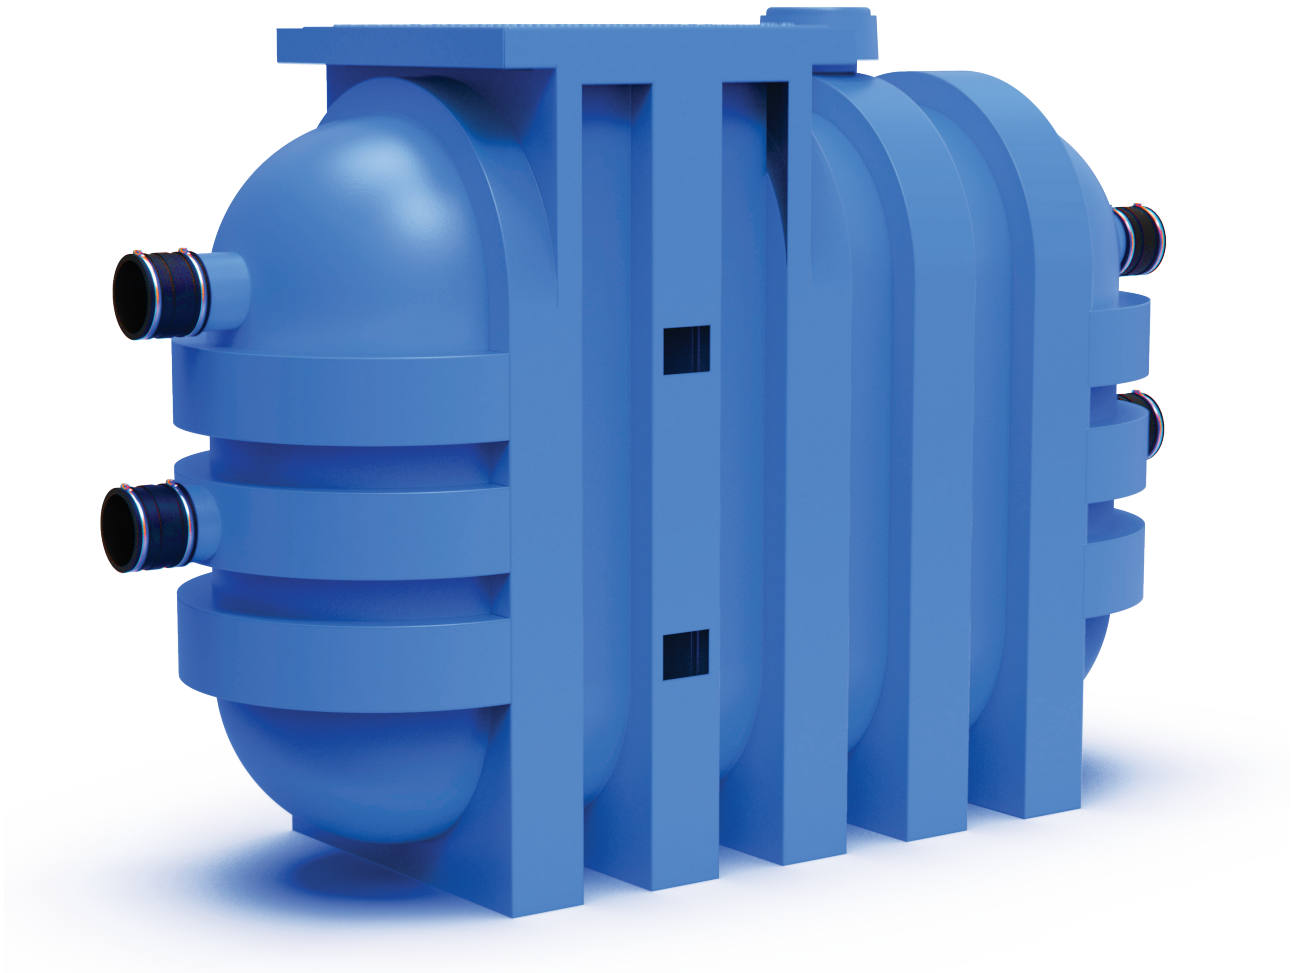

KWIKFLO PUMP STATIONS & TRADE WASTE

Dimensions

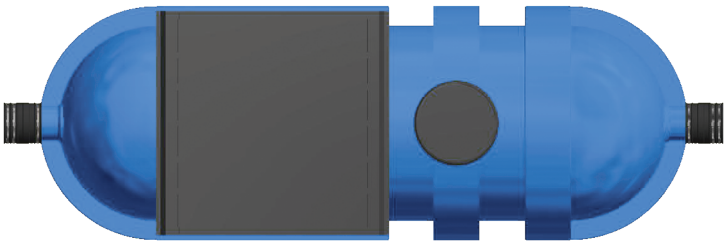

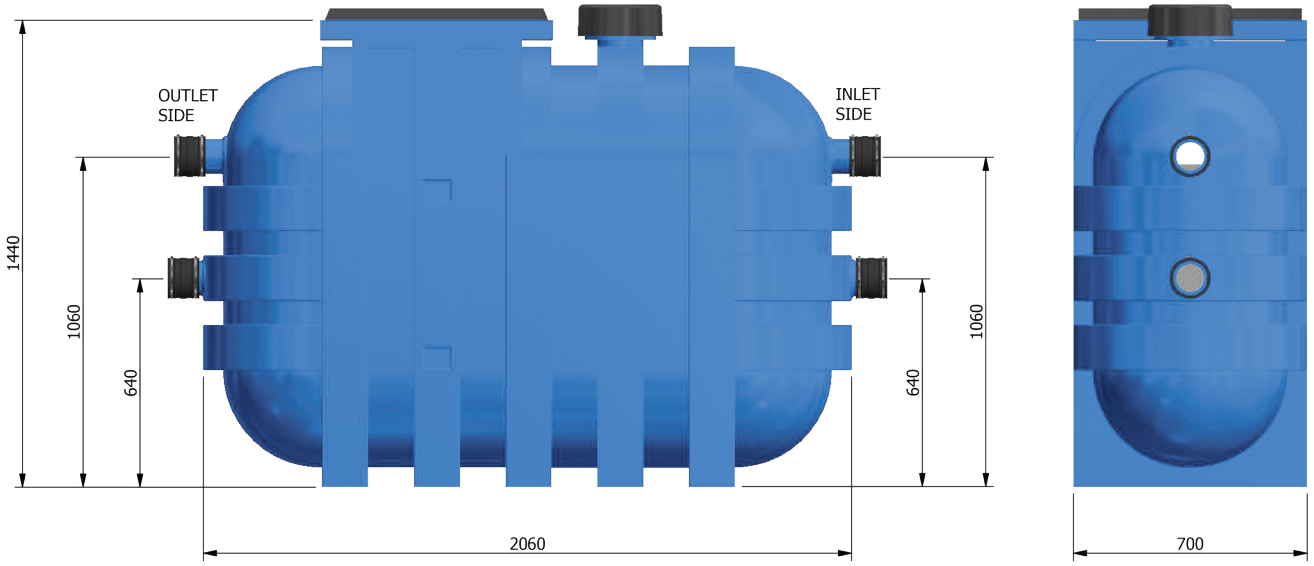

Installation

