
KWIKFLO
PUMP STATIONS & TRADE WASTE

Kwikflo Grease Arrestors

Suitable for above ground & below ground installations and designed to remove fats, oils, grease & suspended solids, Aline Grease Arrestors are a proven and certified range of grease-trap. Suitable for cafés, restaurants canteens, hospitals, bars and hotels, the range includes sizes from 1000L all the way to 5000L, with further custom fibreglass sizes available.



Product Operation

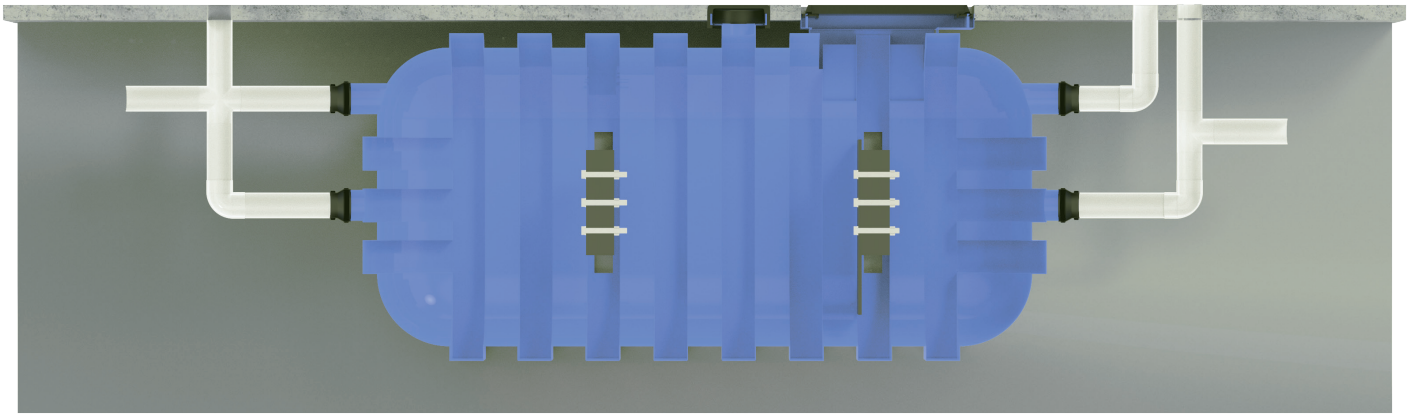

1 The contaminated water arrives through the inlet pipe.

2 Avoiding mixing the re-suspension of settled sludge and grease the internal pipework is directed to the base of the tank.

3 The sludge and solids settles in the base of the unit.

4 Grease is trapped and it floats to surface.

5 Treated liquid is discharged from the grease arrestor to sewer.

KWIKFLO PUMP STATIONS & TRADE WASTE


Product Specification

Following is a table outlining the product codes for the standard Kwikflo Grease Arrestor sizes from 1000L to 5000 L.


Model No.	Volume	Length	Width	Depth	Manhole	Material	Installation
KGT1000	1000L	2060mm	710mm	1485mm	600mm Square	Polyethylene (Poly)	Above & Below Ground
KGT1500	1500L	2925mm	710mm	1485mm	600mm Square	Polyethylene (Poly)	Above & Below Ground
KGT2000	2000L	2600mm	1110mm	1390mm	600mm Round	Fibre-reinforced polymer (FRP)	Above & Below Ground
KGT3000	3000L	3300mm	1110mm	1480mm	600mm Round	Fibre-reinforced polymer (FRP)	Above & Below Ground
KGT4000	4000L	2700mm	1520mm	1800mm	600mm Round	Fibre-reinforced polymer (FRP)	Above & Below Ground
KGT5000	5000L	3400mm	1520mm	1800mm	600mm Round	Fibre-reinforced polymer (FRP)	Above & Below Ground

Typical Layouts


1500L POLY BELOW & ABOVE GROUND

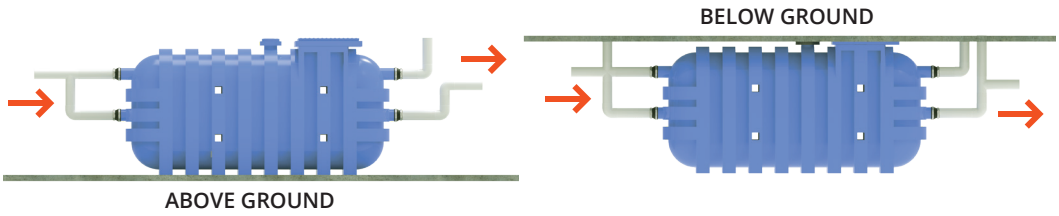


DUAL INLINE 1500L POLY BELOW GROUND

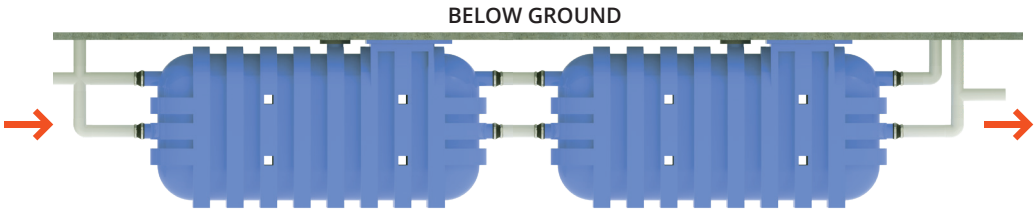

DUAL PARALLEL 1000L POLY BELOW GROUND

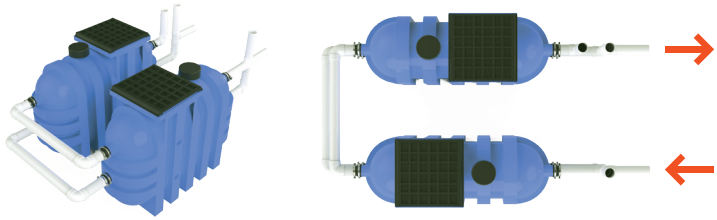

5000L FIBREGLASS BELOW & ABOVE GROUND

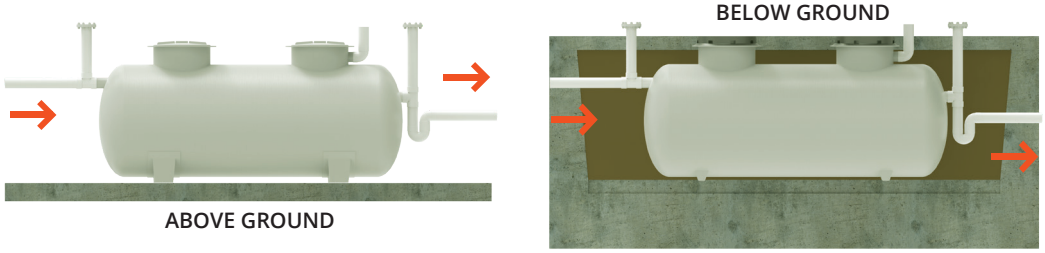

Grease Arrestors

4000L

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features & Benefits

CONSTRUCTION
- FRP tank
- Inlet plumbing to be installed by plumber
- Risers available on request

LIQUID HANDLED
- Raw sewage, Trade waste, Effluent & Stormwater

APPLICATIONS
- Cafés
- Restaurants
- Canteens
- Hospitals
- Bars and Hotels

Specifications


Volume	4000L
Length	2700mm
Width	1520mm
Depth	1800mm
Manhole	2 x 600mm Round
Material	Fibre-reinforced Polymer (FRP)
Installation	Above & Below Ground


Note that the water level/ outlet pipe must be 150mm below the inlet.




KWIKFLO PUMP STATIONS & TRADE WASTE


Dimensions

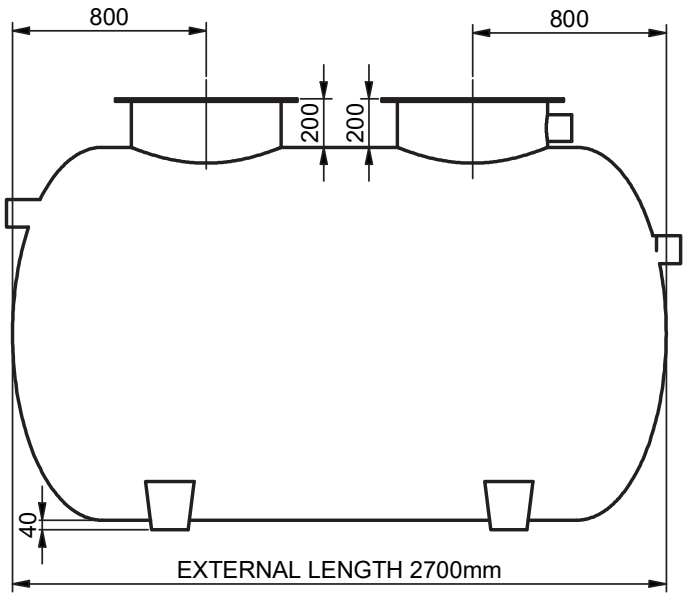

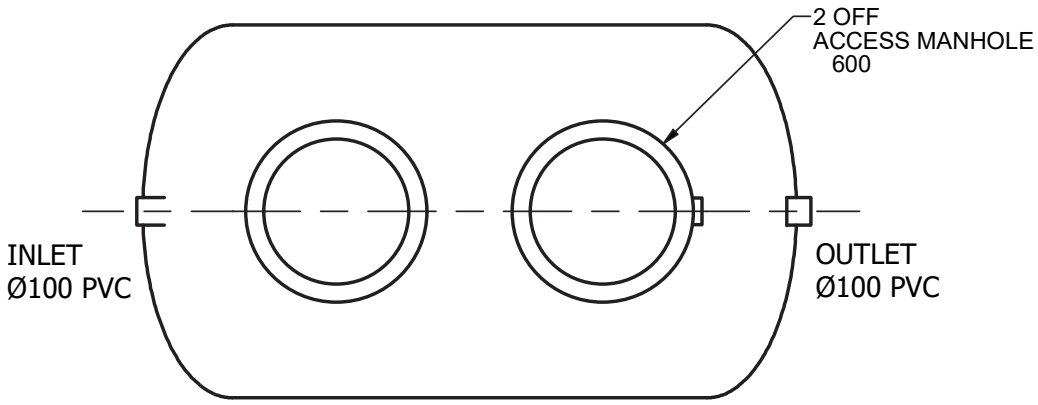

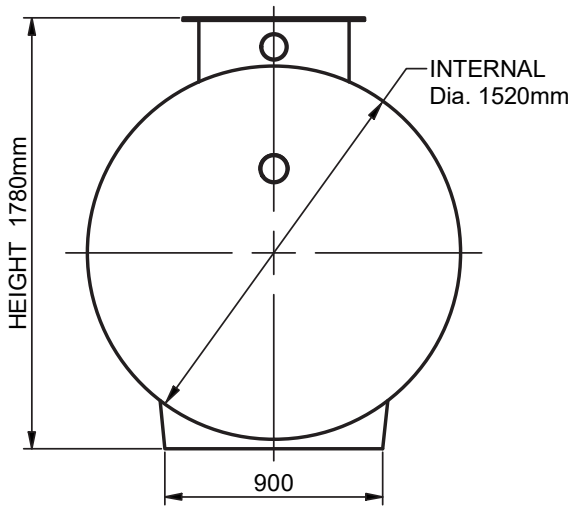


SIDE VIEW
IN GROUND

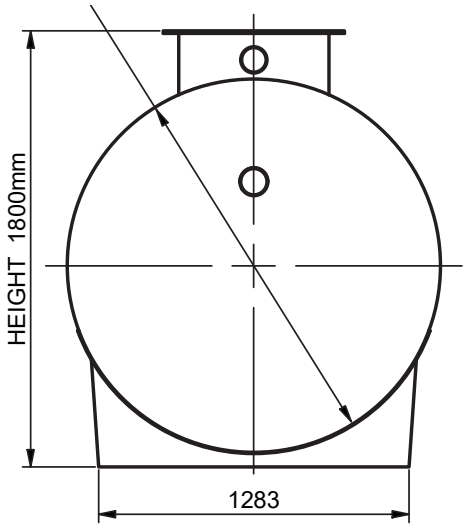


SIDE VIEW
ABOVE GROUND

Lid Options


RATING	CLASS A	CLASS B	CLASS C	CLASS D	CLASS E	CLASS F	CLASS G
Typical Use	Areas (including foot ways) accessible only to pedestrians & pedal cyclists & closed to other traffic (extra light duty	Areas (including foot ways & light tractor paths) accessible to vehicles (excluding commercial vehicles) or livestock (light duty)	Malls and areas open to slow moving commercial vehicles (medium duty)	Carriage ways of roads & areas open to commercial vehicles (heavy duty)	General docks & aircraft pavements (extra heavy duty - E)	Docks & aircraft pavements subject to high wheel loads (extra heavy duty - F)	Docks & aircraft pavements subject to very high wheel loads(extra heavy duty - G)
Nominal Wheel Loading Kg	350	2,670	5,000	8,000	13,000	20,000	30,000
Serviceability	6.7	53	100	140	267	400	600
Ultimate Limit State Design Load kN	10	80	150	210	400	600	900




HERCULES SOLID TOP ROUND 600MM CL B




HERCULES SOLID TOP SQUARE 600MM CL D



HERCULES SOLID TOP SQUARE 600MM CL B



SQUARE POLY 600x600MM



KWIKFLO ROUND FIBREGLASS 600MM



HERCULES ROUND 225MM



POLY ROUND 225MM

DESCRIPTIONS	TYPE	CLASS	INSTALL
FOR 1000L & 1500L POLY GREASE ARRESTORS			
ALINE INSPECTION PORT LID 200M POLY	200mm Round	-	Above Ground
HERCULES ROUND COVER 225MM CLASS B	225mm Round	Class B	Below Ground
HERCULES ROUND COVER 225MM CLASS D	225mm Round	Class D	Below Ground
KWIKFLO FIBREGLASS LID 600X600	600mm Square	-	Above Ground
KWIKFLO POLY LID 600X600	600mm Square	-	Above Ground
HERCULES URBANFILL ACCESS COVER 600X600 CLASS B	600mm Square	Class B	Below Ground
HERCULES SOLID TOP ACCESS COVER CI 600X600 CLASS B	600mm Square	Class B	Below Ground
HERCULES SOLID TOP ACCESS COVER CI 600X600 CLASS D	600mm Square	Class D	Below Ground
ALINE CONCRETE INFILL ACCESS COVER CI 600X600 CLASS D	600mm Square	Class D	Below Ground
FOR 2000L - 5000L FIBREGLASS GREASE ARRESTORS			
KWIKFLO FIBREGLASS LID 600 MM Diameter	600mm Round	-	Above Ground
HERCULES SOLID TOP CIRCULAR ACCESS COVER CI 600 DIA. CLASS B	600mm Round	Class B	Below Ground
HERCULES SOLID TOP CIRCULAR ACCESS COVER CI 600 DIA. CLASS D	600mm Round	Class D	Below Ground

Risers available on request

KWIKFLO PUMP STATIONS & TRADE WASTE

Sydney WATER

UrbanUtilities

BRISBANE CITY

Dedicated to a better Brisbane

APPROVED
Listed pre-treatment for food businesses

Manufacturer	Supplier's item
Aline Pumps **1800 018 999**	Aline Grease Arrestor MPT/AGA/1000L Above ground and below ground installation Material - polyethylene Kwikflo Grease Trap Range KGT1000 Above and below ground installation Material - polyethylene
Aline Pumps **1800 018 999**	Aline Grease Arrestor MPT/AGA/1500L Above ground and below ground installation Material - polyethylene Kwikflo Grease Trap Range KGT1500 Above and below ground installation Material - polyethylene
Aline Pumps **1800 018 999**	Kwikflo Grease Separators KGS2000AG KGS2000BG KGS3000AG KGS3000BG KGS4000AG KGS4000BG KGS5000AG KGS5000BG Above and below ground installation Material - polyethylene KGT2000 KGT3000 KGT4000 KGT5000 Above and below ground installation Material - FRP