
TORNATECH

Features & Benefits

- Built to AS2941-2013
- ViZiTouch Light operator interface
- IP55 enclosure
- Pressure and event recorder
- Battery voltage and amperage display
- CRANK ISOLATE - NORMAL selector switch
- Manual control battery crank pushbutton
- Manual start battery crank pushbutton
- Stop pushbutton
- Remote start provision
- Pressure transducer externally mounted with protective cover
- Gland plate
- Audible alarm
- Alarm contacts for remote indication
- Crank cycle



Configuration

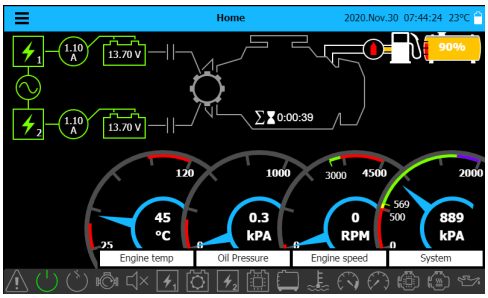


CONTROLLER DIMENSIONS (MM)	APPROX. CONTROLLER WEIGHT (KG)
500 x 600 x 240	29


Digital Engine Gauges

- Tachometer (RPM)
- Integrated speed switch
- Field calibrated
- Field adjustable low (run) and high (over-speed) settings
- Test and reset button
- Coolant Temperature (selectable °F or °C)
- Oil Pressure (selectable PSI, kPA or bar)
- Fuel level (%)


Configuration

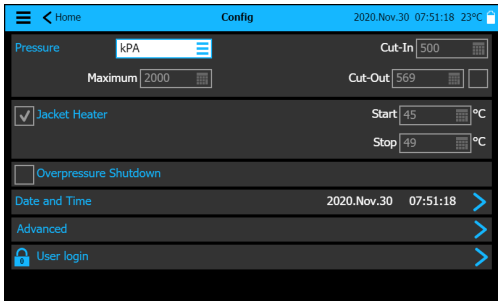


Statistics

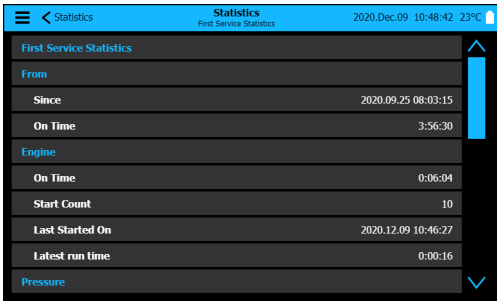

Events/History

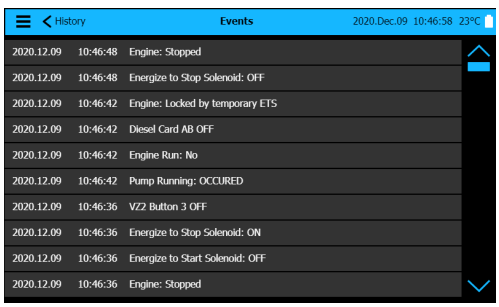

Pressure Curves

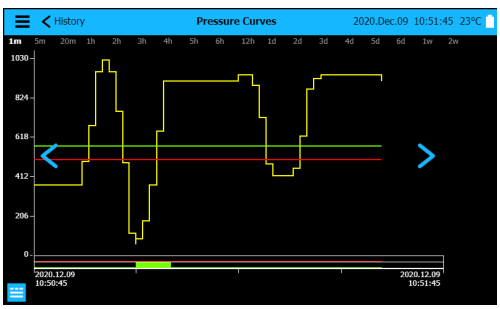

TORNATECH





Tornatech V2 Vizitouch Interface

- 7” color touch screen (HMI technology)
- Embedded microcomputer with software PLC logic
- Multi-language
- Upgradeable software
- Waterproof USB port with screw-in cover
- Upgradeable software


TORNATECH

Features & Benefits

- Built to AS2941-2013
- ViZiTouch Light operator interface
- IP55 enclosure
- Pressure and event recorder
- AC voltage and amperage display
- Battery charger
- DC voltage and amperage display
- Run test push button
- Start and stop pushbuttons
- Locked rotor protector
- Phase reversal indication
- Remote start / deluge valve start provision
- Pressure transducer externally mounted with protective cover
- Gland plate
- Alarm contacts for remote indication



Home page

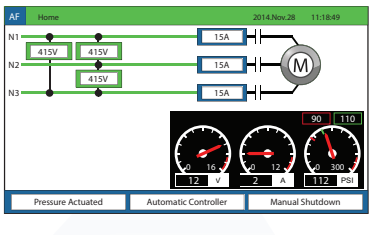


ViZiTouch Light operator interface

Major features include:


- Touch screen operation with 4.2" color display and intuitive graphics
- Expandable storage
- Multi-language
- Upgradeable software
- Password protected




Settings




History/Statistics



Events



Pressure Curves



	ACROSS- THE-LINE	WYE-DELTA OPEN TRANSITION	SOFT START SOFT STOP	VARIABLE SPEED
MODEL NUMBER	AFA	AFY	AFS	AFV
VOLTAGE	FULL	REDUCED	REDUCED	REDUCED
TYPICAL VOLTAGE	100%	100%	30%	VARIABLE
INRUSH CURRENT	6 X NORMAL LOAD CURRENT	33% OF NORMAL	30% OF NORMAL	VARIABLE
STARTING TORQUE	100%	33%	30%	VARIABLE
MOTOR TYPE	STANDARD	SPECIAL	SPECIAL	INVERTER DUTY
# OF WIRE CONNECTIONS	3 WIRE	6 WIRE	6 WIRE	3 WIRE

Based on NEMA B type motors.

TORNATECH

Dimensions (mm)

415V / 3PH / 50HZ	AFA	AFY	AFS	AFV
3.7 KW - 22 KW	850 x 600 x 250	850 x 600 x 250	850 x 600 x 250	1825 x 1100 x 360
30 KW - 45 KW	N/A			
55 KW			1200 x 800 x 300	
75 KW				
90 KW				1625 x 1525 x 500
110 KW		1200 x 800 x 300	Consult factory	
132 KW				Consult factory



Alarm bell



Externally mounted pressure transducer with protective cover




Lockable mains isolator

ViZiTouch Light operator interface



USB Port exterior



USB Port interior

TORNATECH

Features & Benefits

- Solid state controls with digital iPD+ operator interface
- All adjustments on door front
- Visual indicators
- Manual motor run
- Automatic motor run
- System pressure
- Automatic mode
- Off mode
- Motor overload
- Pump start counter
- Elapsed time meter (hours / non-resettable)
- Timers
- Minimum run period timer
- Sequential start timer
- Operators
- OFF-AUTO pushbutton
- Start and stop pushbuttons
- NEMA 2 enclosure
- Pressure transducer
- Fuseless magnetic motor starter



System status diagnostic LED's for:

i. Green: system pre sure at or above cut-out value

ii. Yellow: system pressure between cut-in and cut-out

iii. Red: system pressure at or below cut-in value




High luminosity four digit digital display

Motor run LEDs (manual start or automatic start)

Navigation keypad

Start and stop pushbuttons

OFF-AUTO position pushbutton and visual indication (LED)

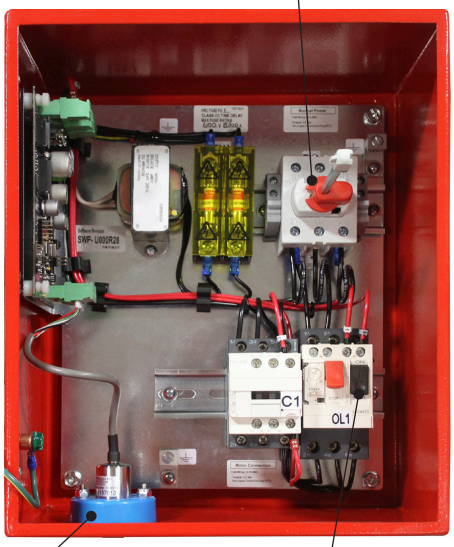


Door-interlocked rotary type disconnect switch


Pressure transducer with 0-600psi range and stainless steel construction

Fuseless magnetic motor starter with thermo-magnetic motor protector

TORNATECH

Dimensions

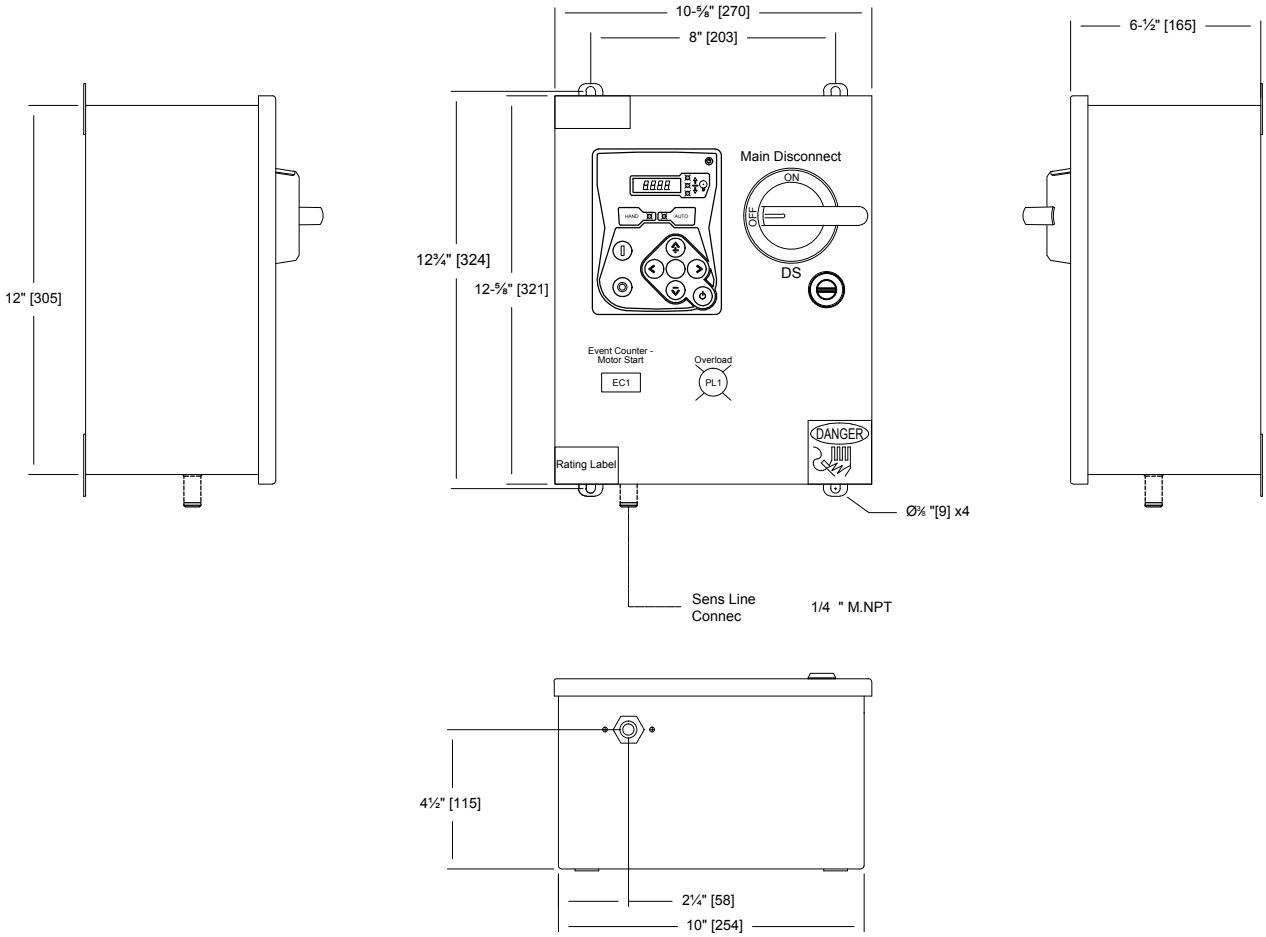

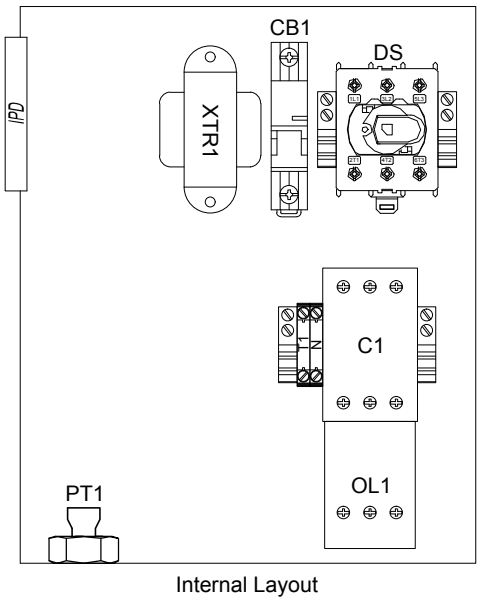

Internal Layout

DESIGNATION	DESCRIPTION	TORNATECH ID
C1	Contactor	5NOA001
CB1	Circuit Breaker 1A	1LOV049
DS1	Disconnect Switch	1KAT001
EC1	Event Counter	5RED001
Enclosure	Enclosure	2BOX13A
IPD	Digital Pressure Inter-face	2IPD005
OL1	Overload	5NOA002
PL1	Red Pilot Light	1SIE197+1SIE225
PT1	Pressure Sensor	1SEN006
XTR1	Transformer 25VA	1FRO030