Dual Hot Water Circulators

A hot water recirculation system, also known as a 'demand system', is a system that ensures that a constant flow of hot water is immediately available when an outlet tap is turned on. It achieves this by pumping hot water through the building's hot water system, either at pre-set times during the day or when the water at the tap drops below a certain temperature. Hot water systems on medium to large buildings are often comprised of dual pumps and are installed in a package that includes a control panel, allowing continuous operation by alternating the running pump on a pre-determined cycle.

Aline offers pre-built Dual Hot Water Circulator packages to suit any on site need, ranging from small two story apartment buildings or large residences, right up to 40+ storey buildings which may require multiple circulator sets in series.

Control Systems

Aline's Dual Hot Water Circulator systems do come in standard pre-configured packages, however can be modified or custom-built to suit site specification. Panels that include BMS are common, and panels can also be configured with more advanced options such as alarms, SMS diallers, auxiliary panels or standalone enclosures.







Aline
PUMPING WITH INNOVATION
Aline
PUMPING WITH INNOVATION

Features & Applications

A bolt-on enclosure that can be used with either Wilo or Aline Standard Dual Hot Water circulator systems. Custom modification may be required for some models.

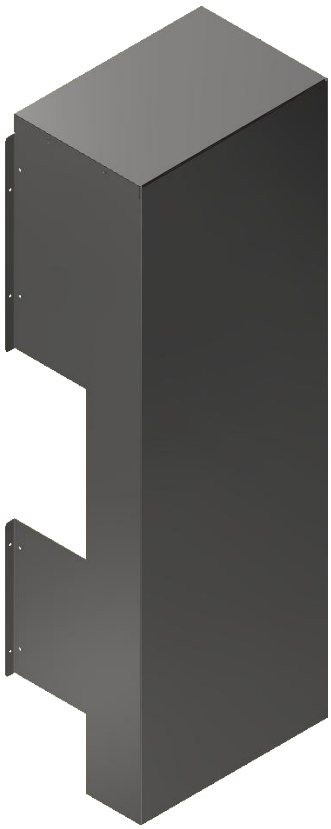

Dimensions



