Product Description

High head single channel sewage handling submersible sump pumps with cutting impeller, available with a choice of single or three phase motors

Applications

- Sewage water pumping
- Sump emptying
- Septic effluent disposal
- Water transfer
- Pumping of light slurries and factory waster
- Pumping waste water with stringy or long soft solids in suspension

Features

- Open impeller, with tungsten edge cutter, centrifugal design
- Able to pump soft solids in suspension
- Less susceptible to blockage
- Capable of higher heads/pressure
- Able to cut string like materials, reducing the risk of blockage in pump or pipework

Suitable Fluids

Clean or 'grey water' of neutral pH containing up to 20% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension



Features & Benefits


Submersible cutter pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, and pumping liquids with soft solids.

- Dual mechanical seal
- Semi-open tungsten-tipped cutting impeller
- 410 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



The manual version of these pumps will require a control panel and floats.

Performance Curve

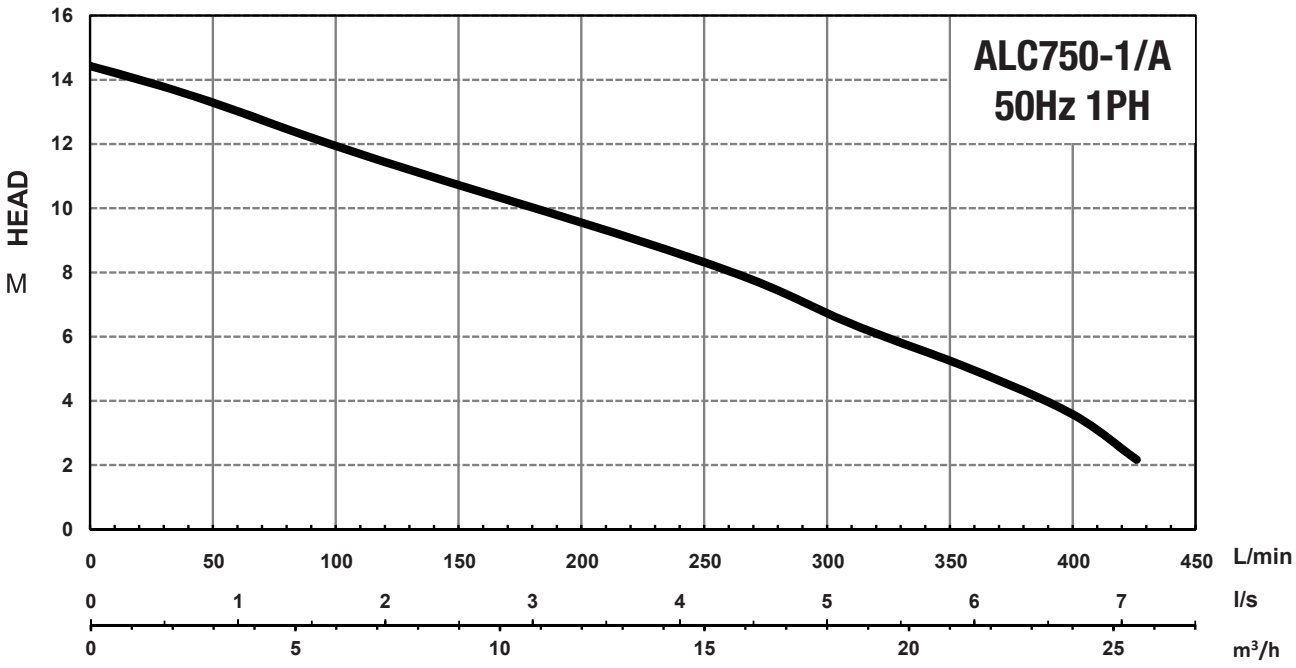

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Cutter	1.0	0.75	6	0°C to 40°C	240V	Automatic/ Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		4M	6M	8M	10M	13M		L X W X H (MM)	
50	2"	420	375	320	255	175	50	14	276 x 235 x 460	18

Features & Benefits


Submersible cutter pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, and pumping liquids with soft solids.

- Dual mechanical seal
- Semi-open tungsten-tipped cutting impeller
- 410 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

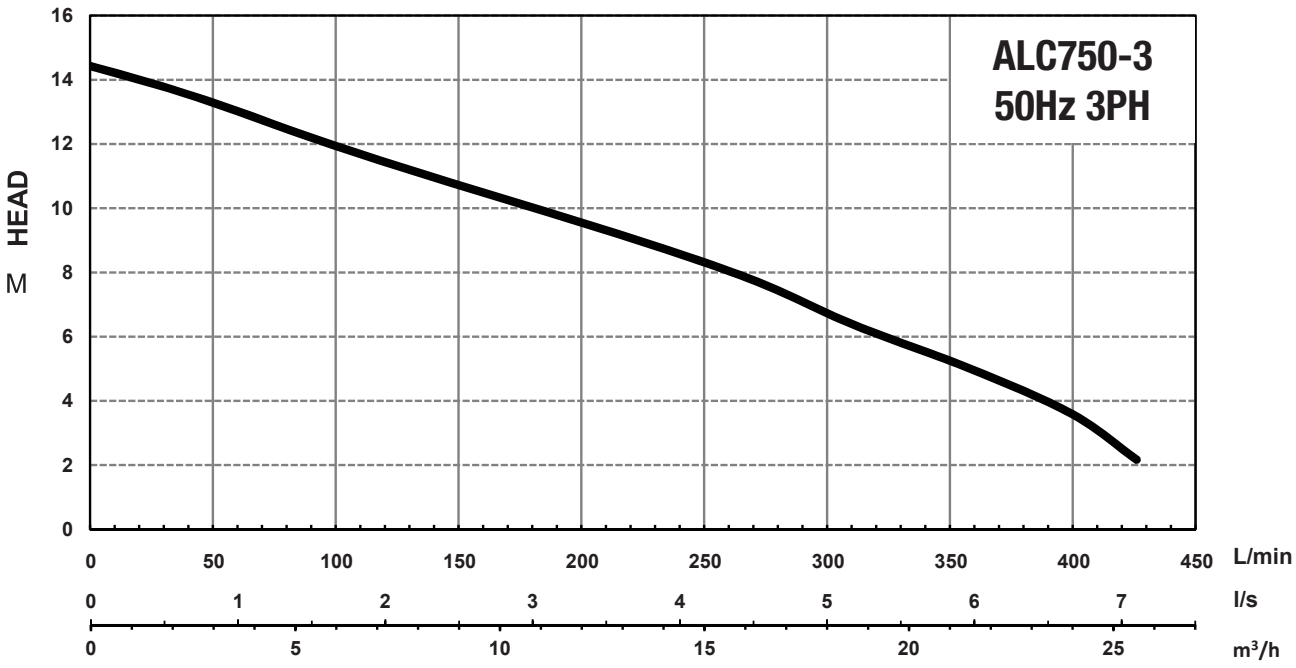

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Cutter	1.0	0.75	1.5	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		4M	6M	8M	10M	13M		L X W X H (MM)	
50	2"	420	375	320	255	175	50	14	276 x 235 x 460	17