Features & Benefits

- Moulded twin head system ensures compact installation & no leaks
- Minimal pressure drop even with high flow
- Durable reinforced polypropylene housings
- Supplied with wall-mount bracket and spanner
- Watermark Approved
- Pressure relief valve included




Specifications

Max flow rate	60L/m (3.6m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1”BSP (25mm)
Outlet	1”BSP (25mm)

Dimensions

A (mm)	B (mm)	C (mm)
375	390	185

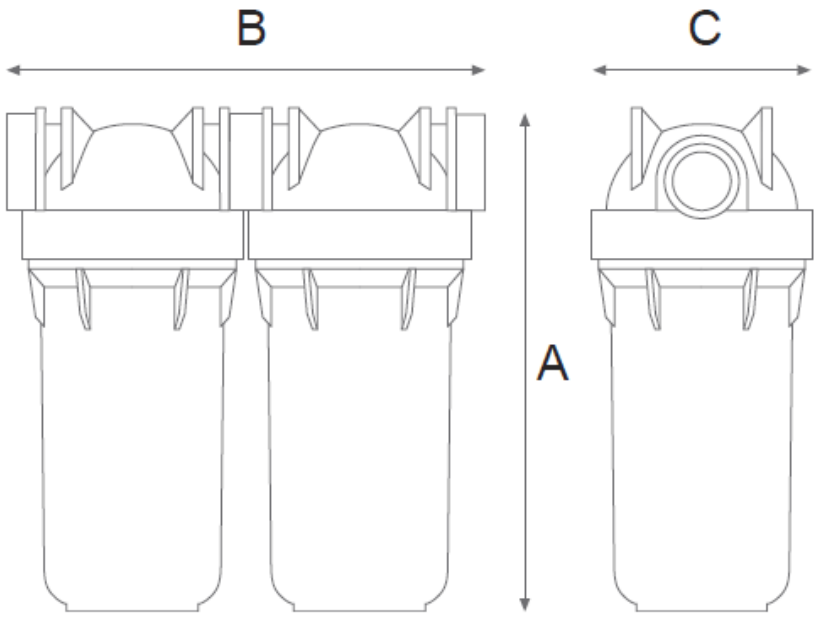

Defender D2

Features & Benefits

- Moulded twin head system ensures compact installation & no leaks
- Minimal pressure drop even with high flow
- Durable reinforced polypropylene housings
- Supplied with wall-mount bracket and spanner
- Watermark Approved
- Pressure relief valve included




Specifications

Max flow rate	90L/m (5.4m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1”BSP (25mm)
Outlet	1”BSP (25mm)

Dimensions

A (mm)	B (mm)	C (mm)
640	390	185

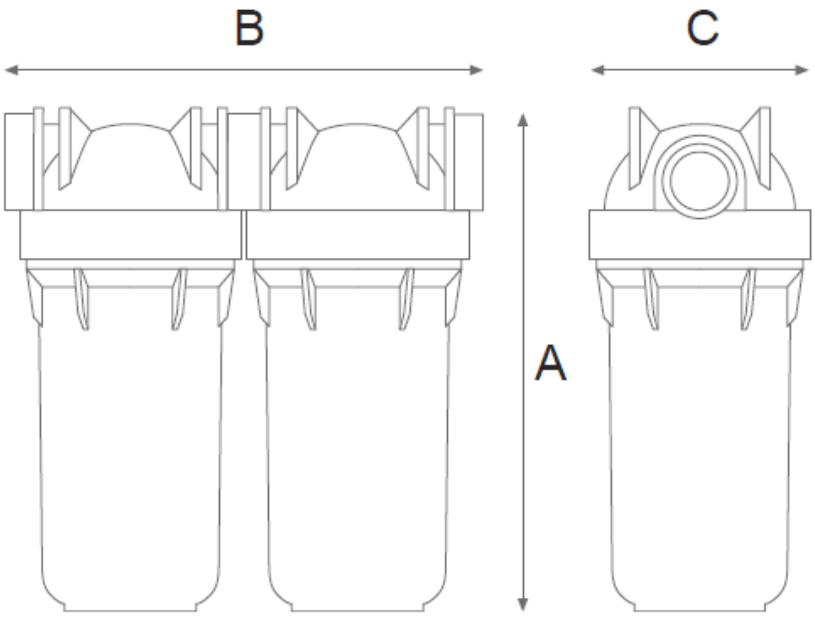

Defender D3

Features & Benefits

- Moulded twin head system ensures compact installation & no leaks
- Minimal pressure drop even with high flow
- Durable reinforced polypropylene housings
- Supplied with wall-mount bracket and spanner
- Watermark Approved
- Pressure relief valve included




Specifications

Max flow rate	180L/m (10.8m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1½"BSP (40mm)
Outlet	1½"BSP (40mm)


Dimensions

A (mm)	B (mm)	C (mm)
640	390	185

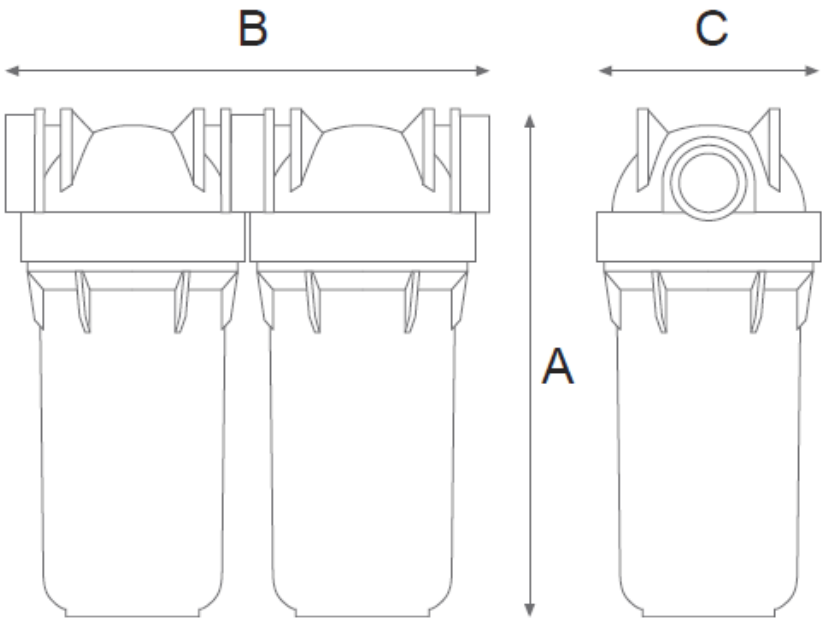


Features & Benefits

- Timer controlled automatic backwash filter complete with 100 micron stainless steel screen
- Durable reinforced polypropylene housing , complete with 5 micron washable sediment filter element
- High output UV disinfection to ensure maximum bacteria kill
- Supplied fitted to backboard, ready to install on site

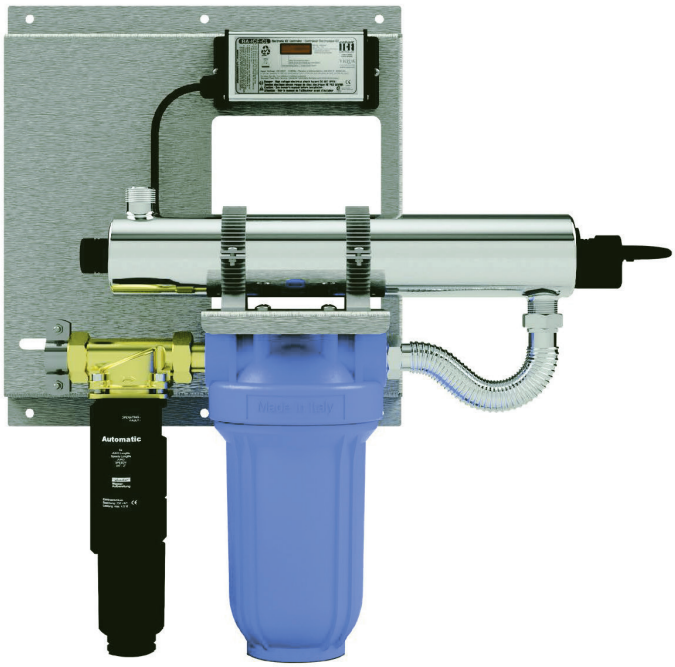


Specifications

Max flow rate	70L/m (4.2m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1"BSP (25mm)
Outlet	1"BSP (25mm)
Power supply	2 x 10 Amp GPO

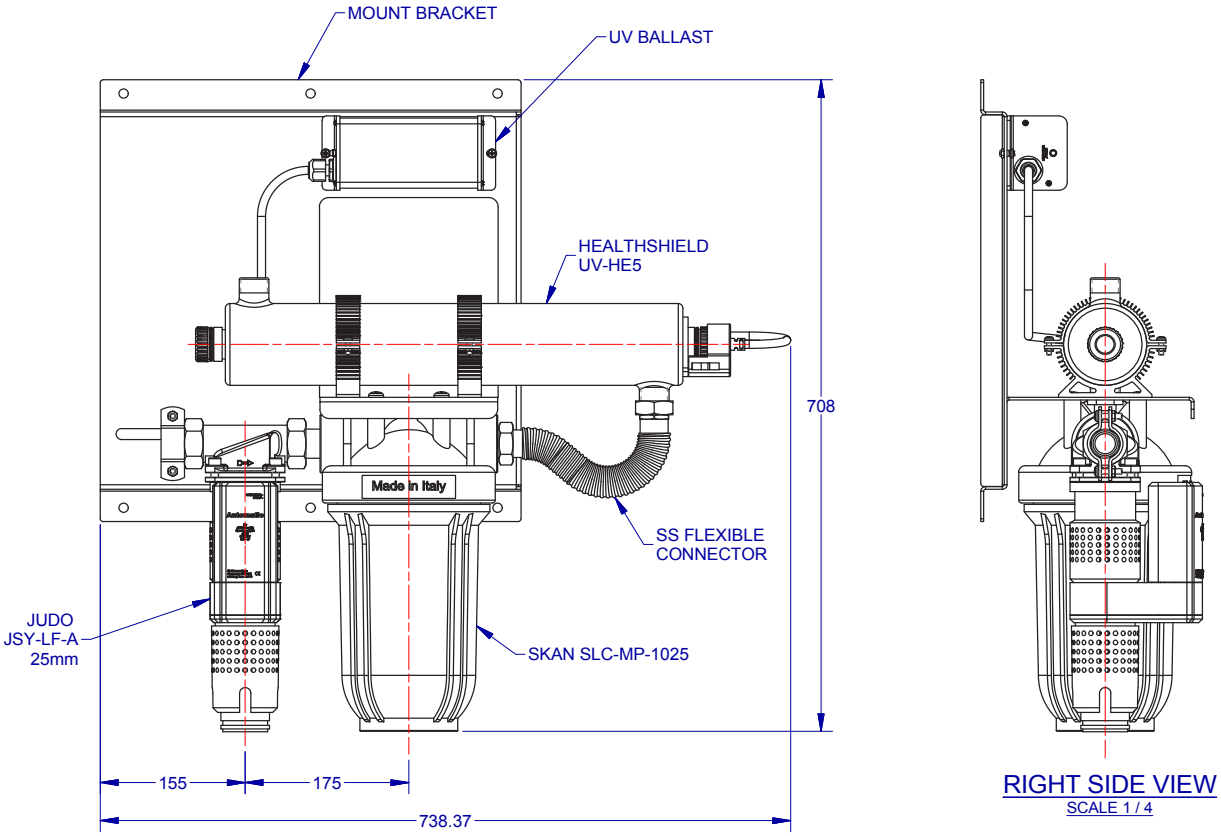


Features & Benefits


- Timer controlled automatic backwash filter complete with 100 micron stainless steel screen
- Durable reinforced polypropylene housing , complete with 5 micron washable sediment filter element
- High output UV disinfection to ensure maximum bacteria kill
- Supplied fitted to backboard, ready to install on site

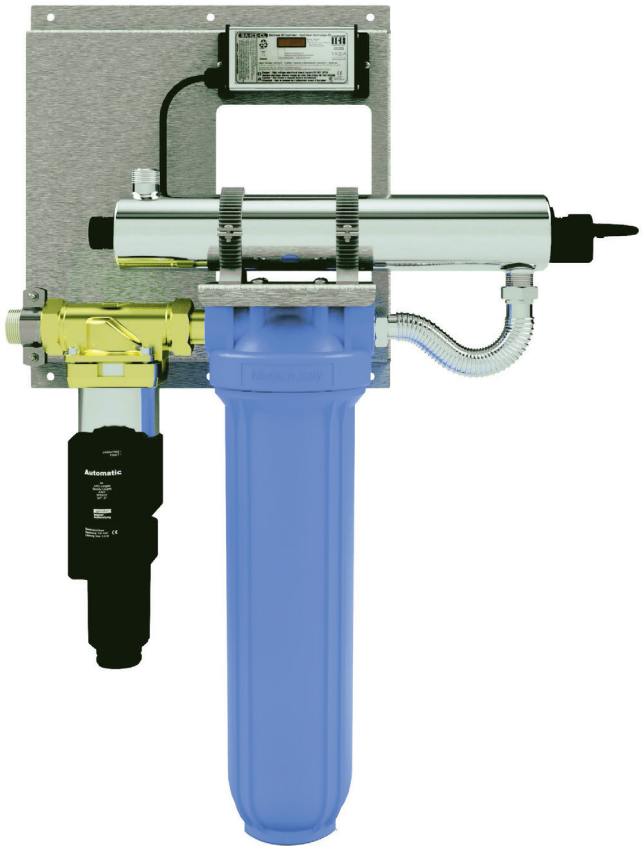

Specifications


Max flow rate	120L/m (7.2m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1½"BSP (40mm)
Outlet	1"BSP (25mm)
Power supply	2 x 10 Amp GPO

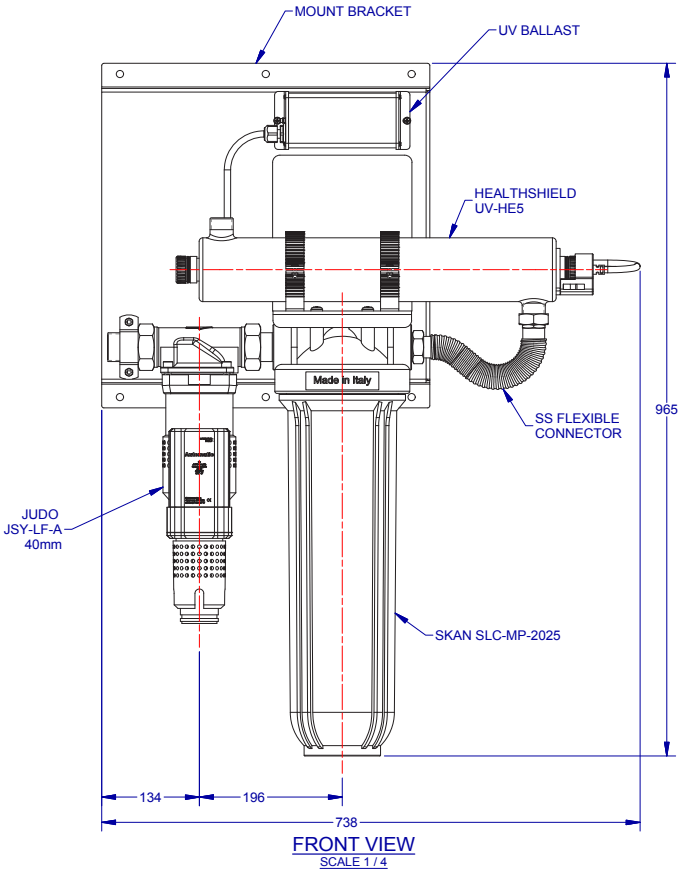

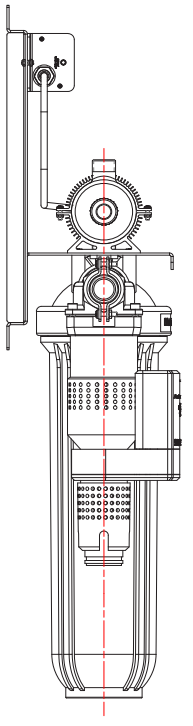


Features & Benefits

- Timer controlled automatic backwash filter complete with 100 micron stainless steel screen
- Durable reinforced polypropylene housing , complete with 5 micron washable sediment filter element
- High output UV disinfection to ensure maximum bacteria kill
- Supplied fitted to backboard, ready to install on site

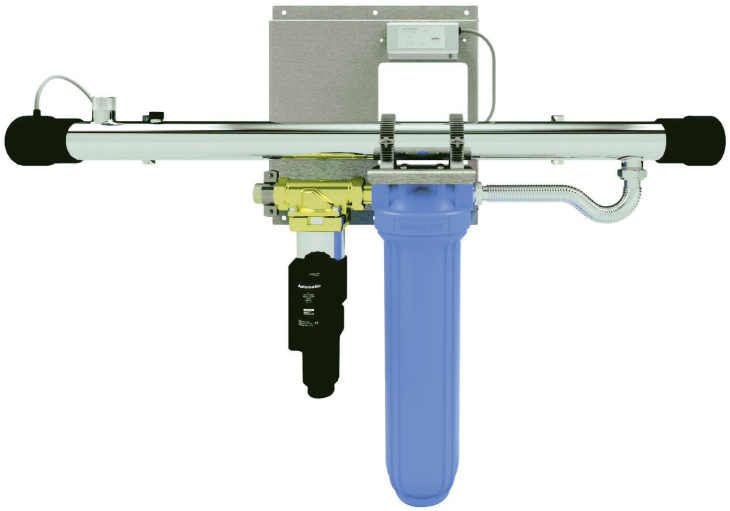


Specifications

Max flow rate	180L/m (10.8m3/h)
Max temperature	45°C
Max pressure	830 kPa
Inlet	1½"BSP (40mm)
Outlet	1½"BSP (40mm)
Power supply	2 x 10 Amp GPO

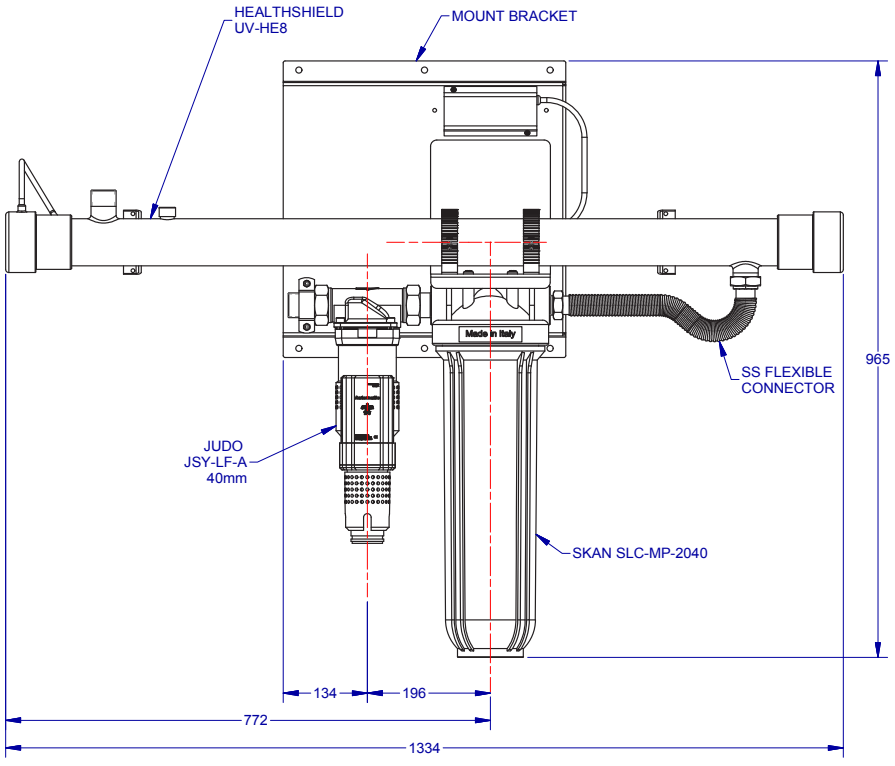


FRONT VIEW
SCALE 1 / 5

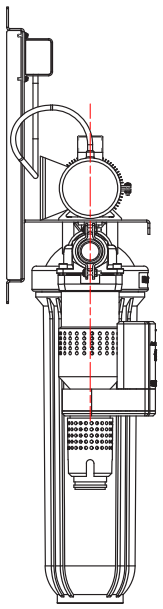

RIGHT SIDE VIEW
SCALE 1 / 5


Features & Benefits

- Timer controlled automatic backwash filter complete with 100 micron stainless steel screen
- Durable reinforced polypropylene housing , complete with 5 micron washable sediment filter element
- High output UV disinfection to ensure maximum bacteria kill
- Supplied fitted to backboard, ready to install on site

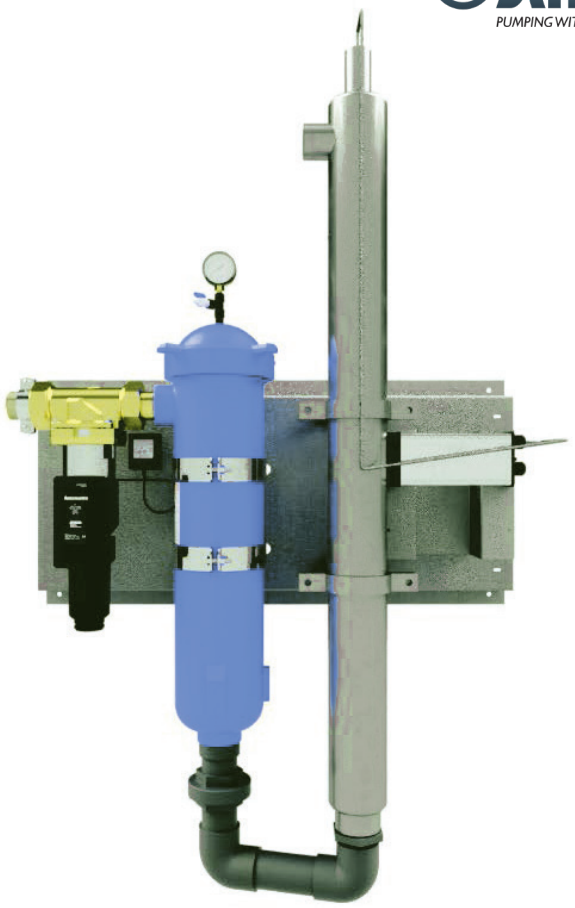


Specifications

Max flow rate	300L/m (18.0m3/h)
Max temperature	45°C
Max pressure	690 kPa
Inlet	2"BSP (50mm)
Outlet	2"BSP (50mm)
Power supply	2 x 10 Amp GPO

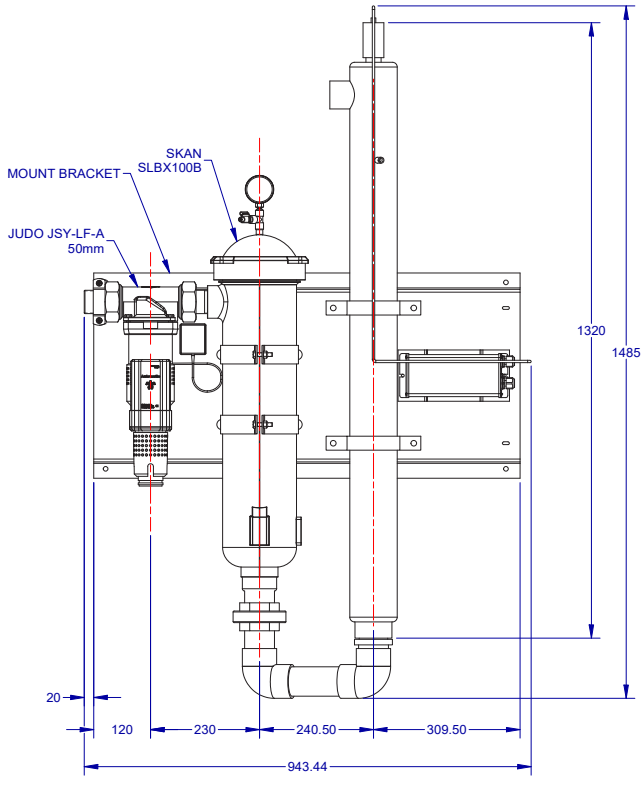

FRONT VIEW

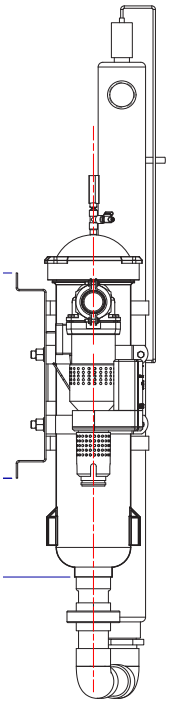

RIGHT SIDE VIEW
SCALE 1/6