Product Description

Dewatering submersible sump pumps with a choice of single or three phase models

Applications

- Sump emptying
- Septic water disposal
- Water transfer
- Pumping of neutral, non-aggressive factory waste water

Features

- Open multi-vane impeller, vortex, centrifugal design
- Able to pump soft solids in suspension
- Less susceptible to blockage
- Capable of higher flows

Suitable Fluids

Clean or 'grey water' of neutral pH containing up to 20% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension




Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing.

- Single phase 240V
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Maximum starts per hour: 20
- Passage of suspended solid up to 20mm



Performance Curve

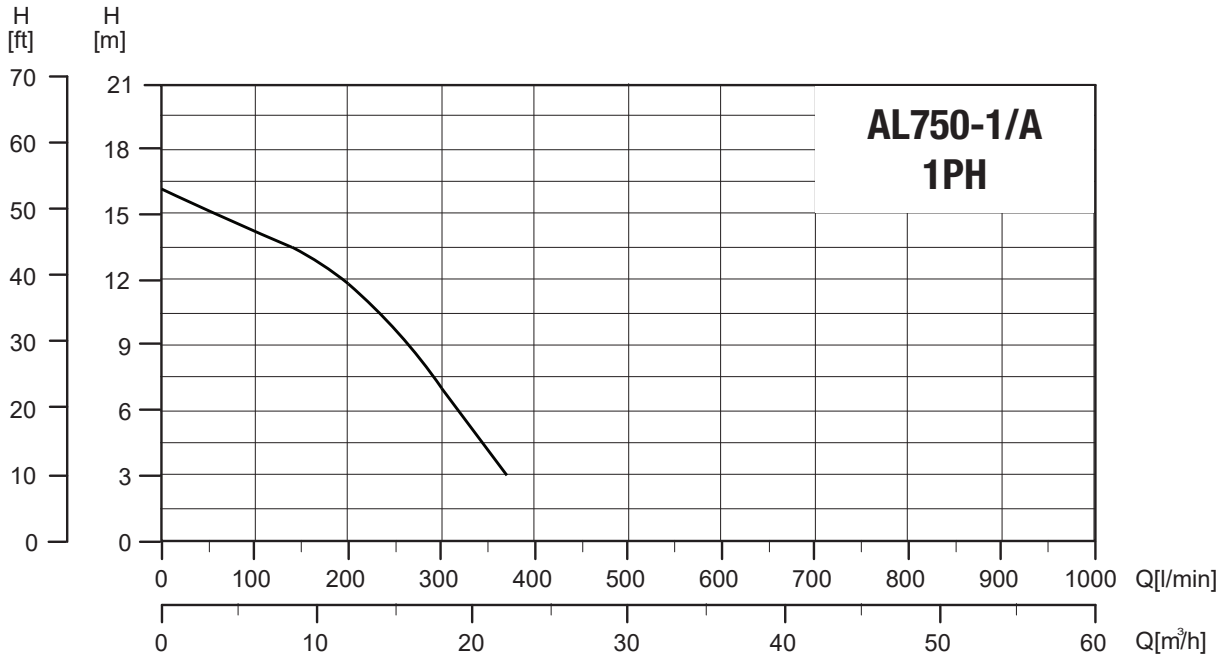

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	1.0	0.75	6	0°C to 40°C	240V	Manual/ Automatic	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
50	2"	380	370	320	270	190	50	13	525 x 250 x 280	27


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Single phase 240V
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Maximum starts per hour: 20
- Passage of suspended solid up to 20mm



Performance Curve

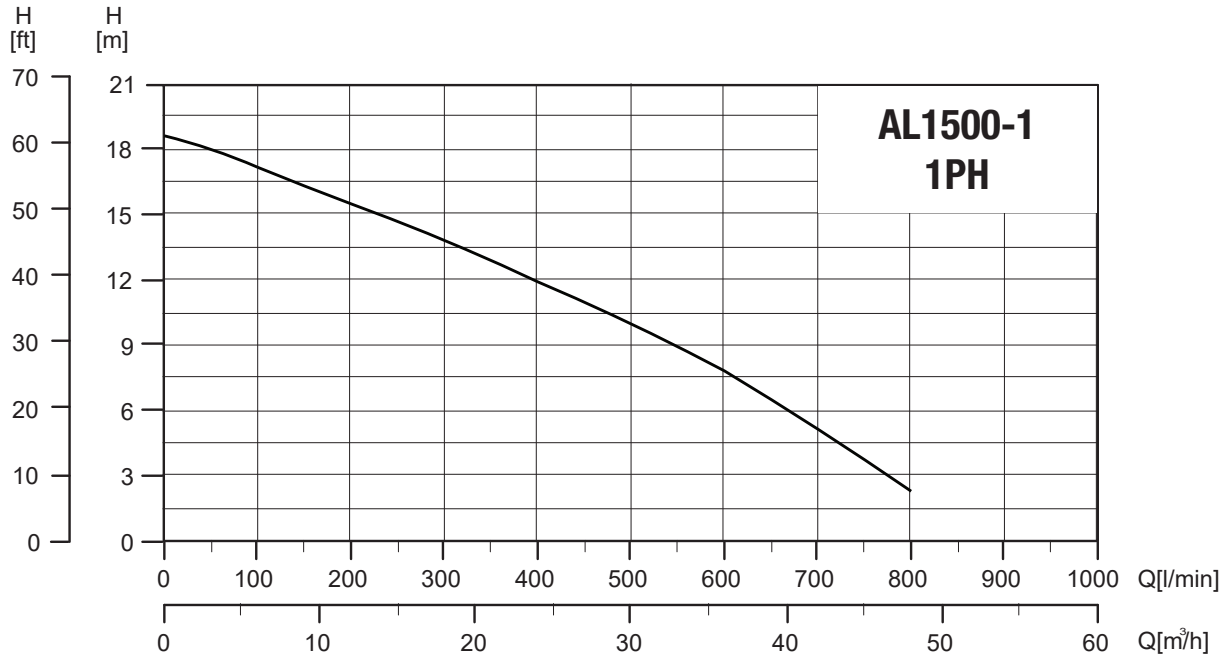

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	2.0	1.5	13	0°C to 40°C	240V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		5M	8M	11M	14M	17M		L X W X H (MM)	
50	2"	500	680	570	410	250	100	17	585 x 245 x 300	36


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Maximum starts per hour: 20



Performance Curve

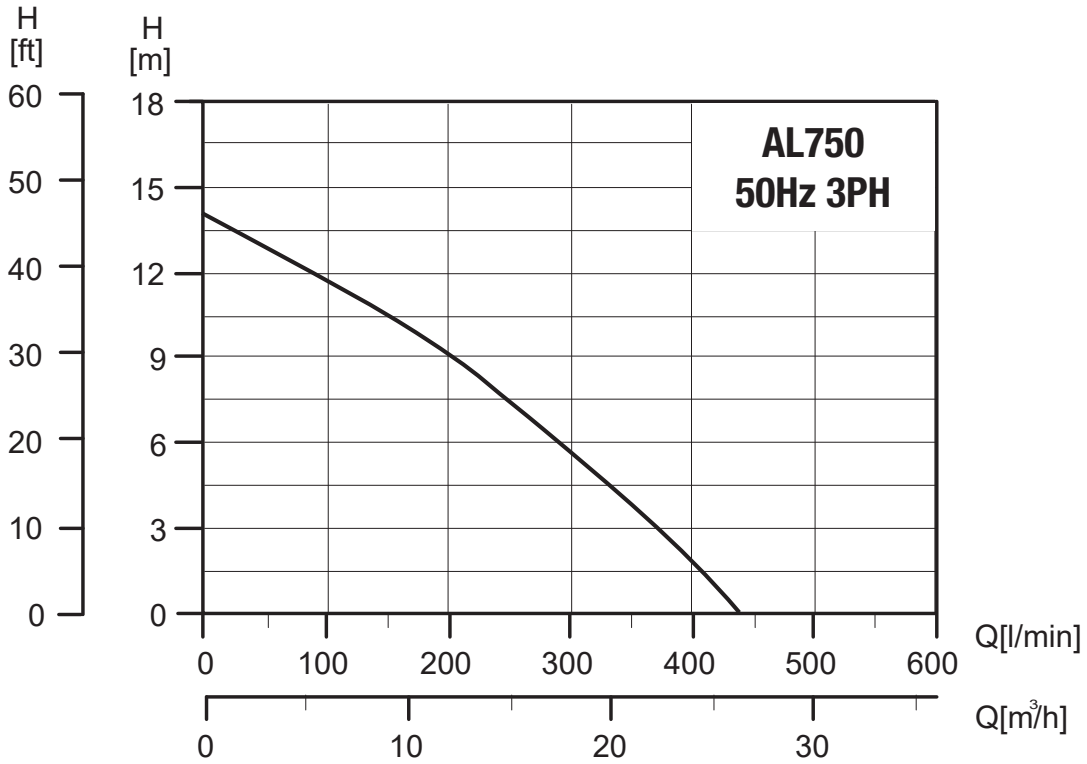

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	1.0	0.75	1.5	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		1.5M	3M	6M	9M	12M		L X W X H (MM)	
50	2"	400	400	370	290	200	90	13	525 x 250 x 280	27


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Maximum starts per hour: 20
- Passage of suspended solid up to 20mm



Performance Curve

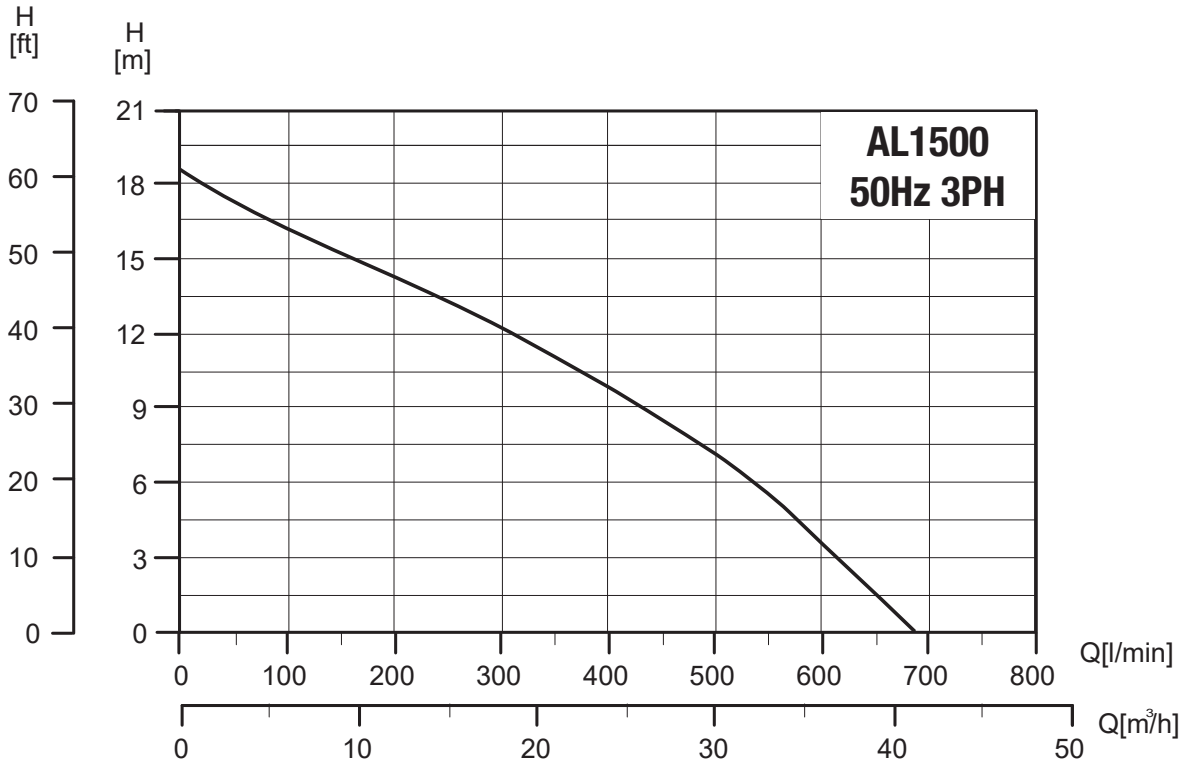

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	2.0	1.5	3	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		5M	8M	11M	14M	17M		L X W X H (MM)	
50	2"	620	550	450	320	180	30	17	585 x 245 x 300	36


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 20mm
- Maximum starts per hour: 20



Performance Curve

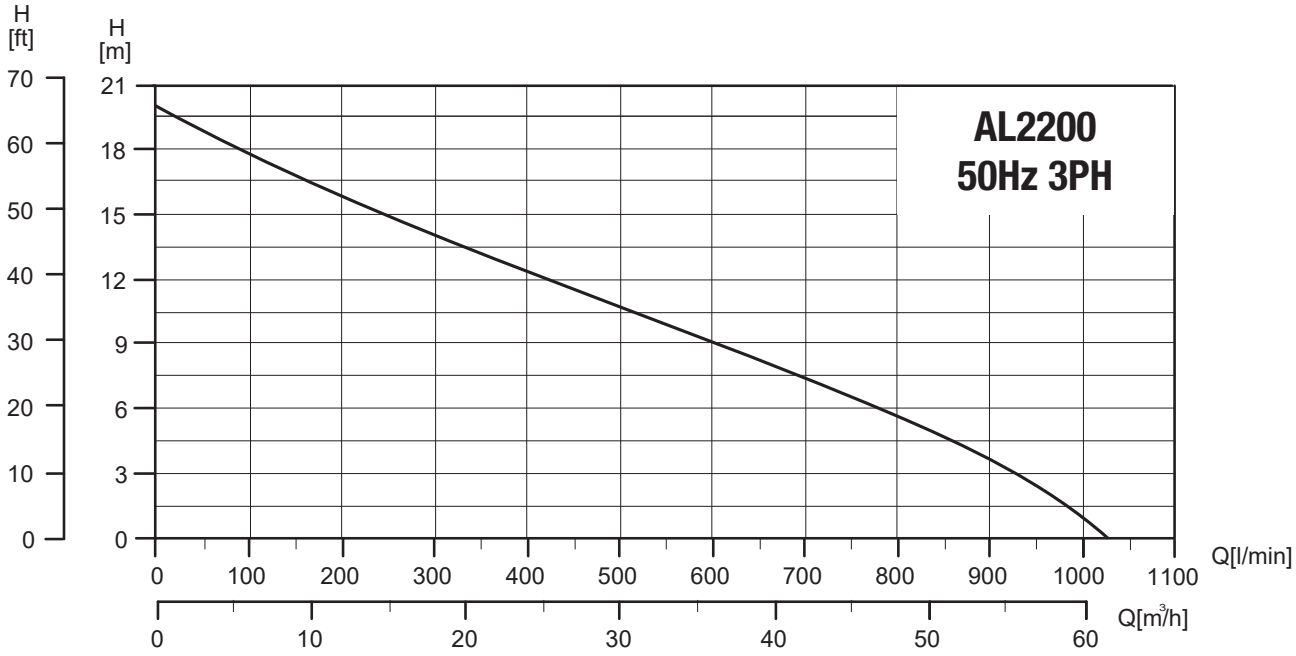

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	3.0	2.2	4.5	0°C to 40°C	415V	Manual	80	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	7M	11M	15M	19M		L X W X H (MM)	
80	3"	1000	920	750	450	250	50	19	585 x 260 x 330	40


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 30mm
- Maximum starts per hour: 20



Performance Curve

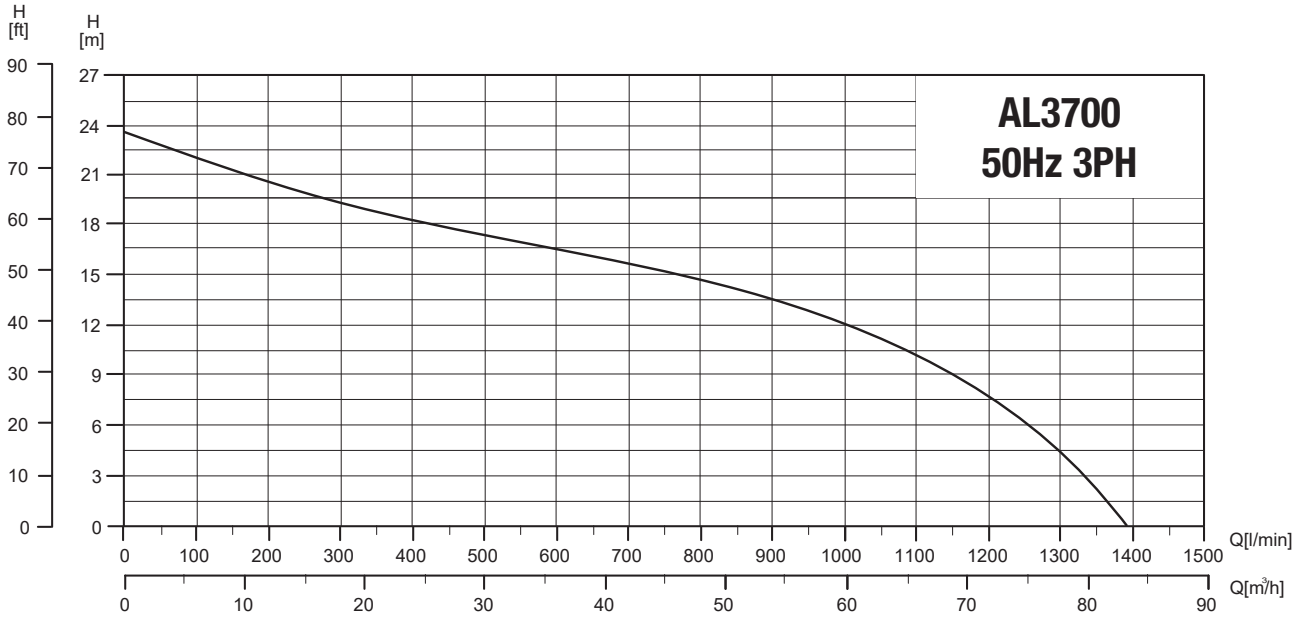

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	5.0	3.7	7.5	0°C to 40°C	415V	Manual	80	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		5M	9M	14M	19M	22M		L X W X H (MM)	
80	3"	1350	1300	1150	850	350	100	23	370 x 325 x 680	65


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 30mm
- Maximum starts per hour: 20



Performance Curve

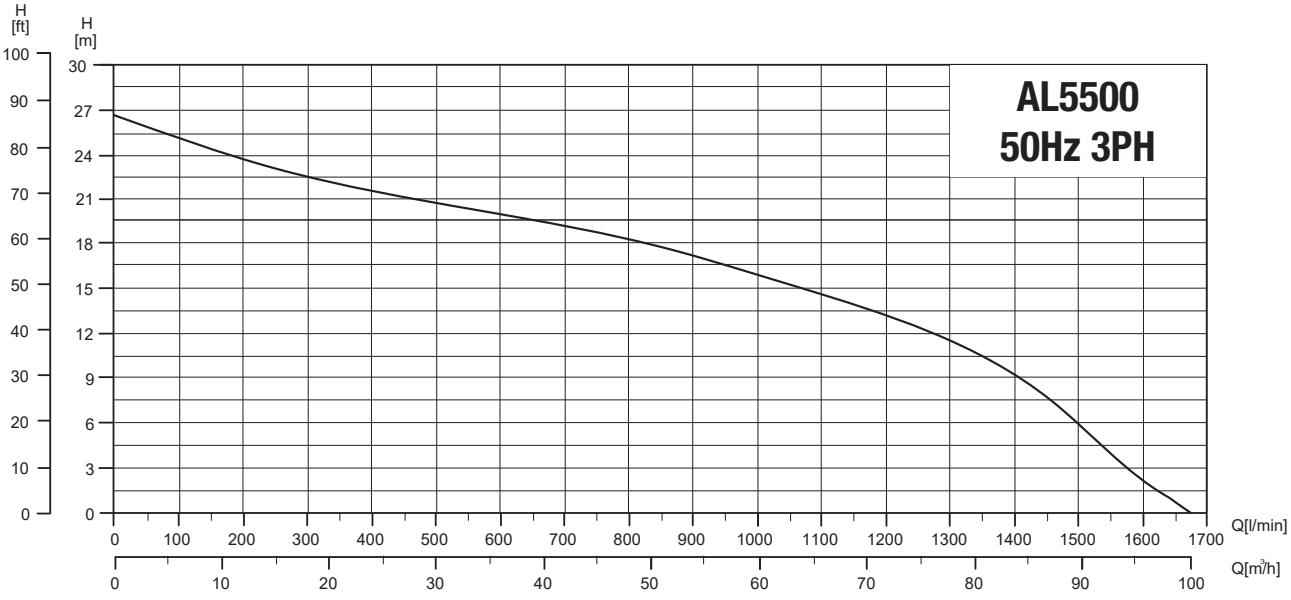

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	7.5	5.5	11	0°C to 40°C	415V	Manual	100	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		10M	14M	18M	22M	25M		L X W X H (MM)	
100	4"	1550	1350	1150	800	350	50	25	400 x 340 x 770	78


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 5m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 30mm
- Maximum starts per hour: 20



Performance Curve

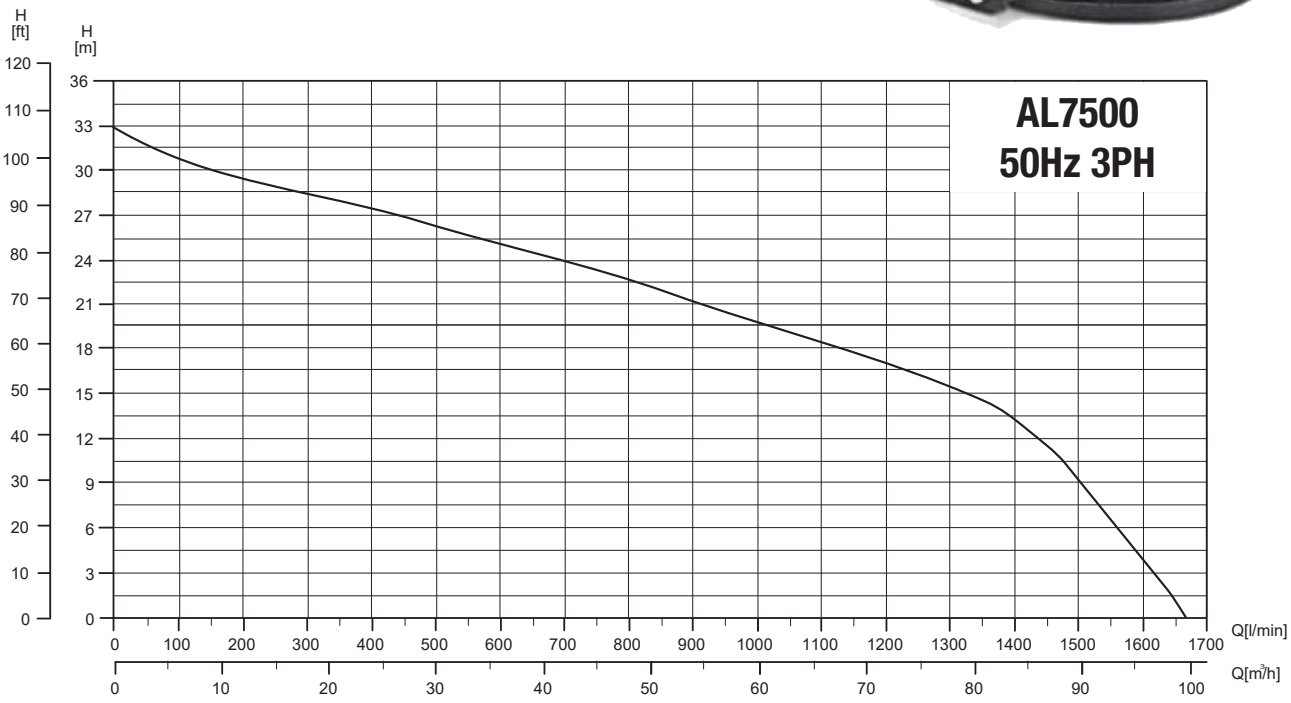

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Open Channel	10.0	7.5	15	0°C to 40°C	415V	Manual	100	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		5M	9M	14M	19M	24M		L X W X H (MM)	
100	4"	1600	1580	1500	1370	1050	700	31	370 x 325 x 680	65