Dual Hot Water Circulators

A hot water recirculation system, also known as a 'demand system', is a system that ensures that a constant flow of hot water is immediately available when an outlet tap is turned on. It achieves this by pumping hot water through the building's hot water system, either at pre-set times during the day or when the water at the tap drops below a certain temperature. Hot water systems on medium to large buildings are often comprised of dual pumps and are installed in a package that includes a control panel, allowing continuous operation by alternating the running pump on a pre-determined cycle.

Aline offers pre-built Dual Hot Water Circulator packages to suit any on site need, ranging from small two story apartment buildings or large residences, right up to 40+ storey buildings which may require multiple circulator sets in series.

Control Systems

Aline's Dual Hot Water Circulator systems do come in standard pre-configured packages, however can be modified or custom-built to suit site specification. Panels that include BMS are common, and panels can also be configured with more advanced options such as alarms, SMS diallers, auxiliary panels or standalone enclosures.






Aline
PUMPING WITH INNOVATION
Aline
PUMPING WITH INNOVATION

Hot Water Circulation

Dual 20-60N

Features & Applications


System

- Dual sanitary suitable hot water circulator pumps with brass non-return and isolation valves plus dual manifold assembly
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

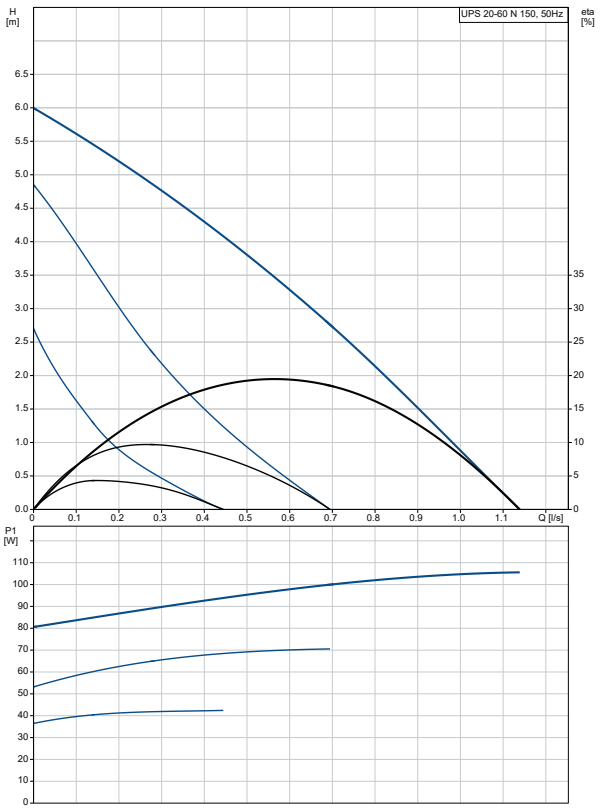

Dimensions

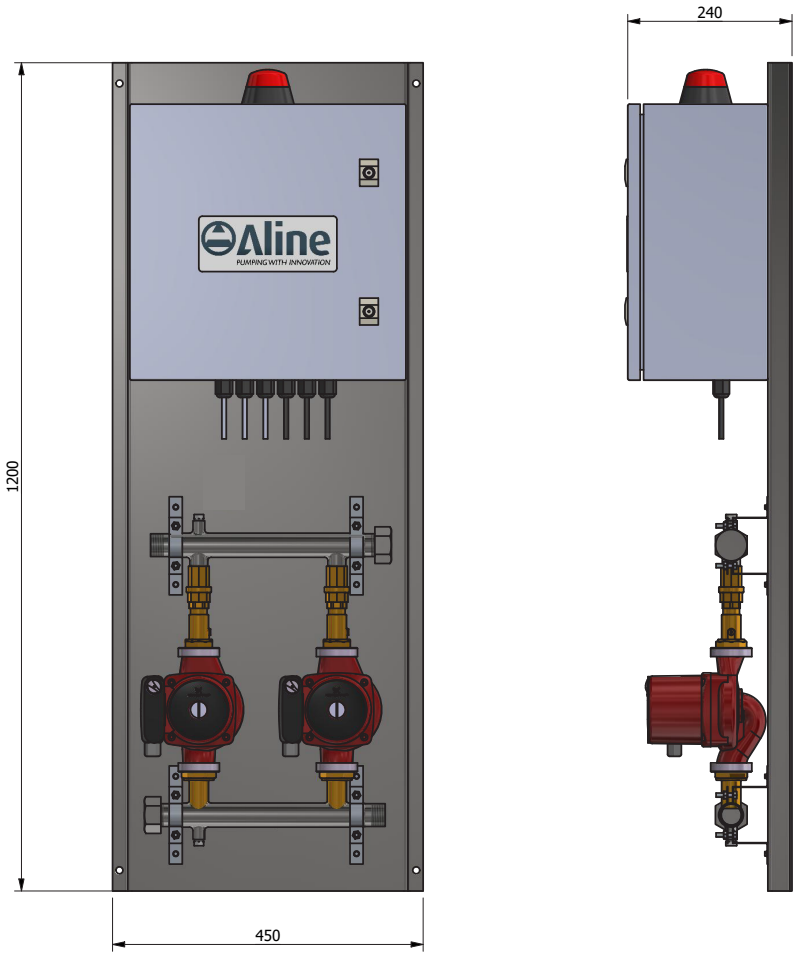

JAVELIN HOT WATER PUMPS

Visit our website for further details www.alinepumps.com.au

Features & Applications


System

- Dual sanitary suitable hot water circulator pumps with brass non-return and isolation valves plus dual manifold assembly
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

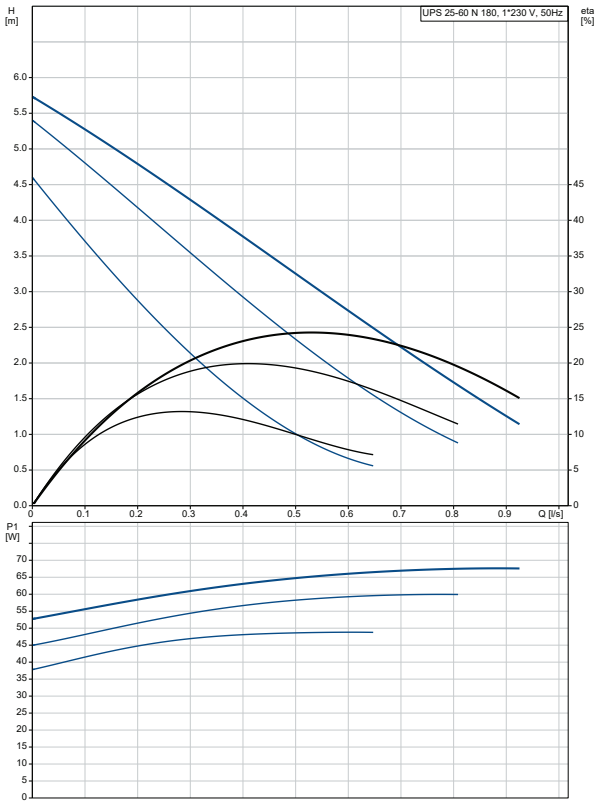

Dimensions

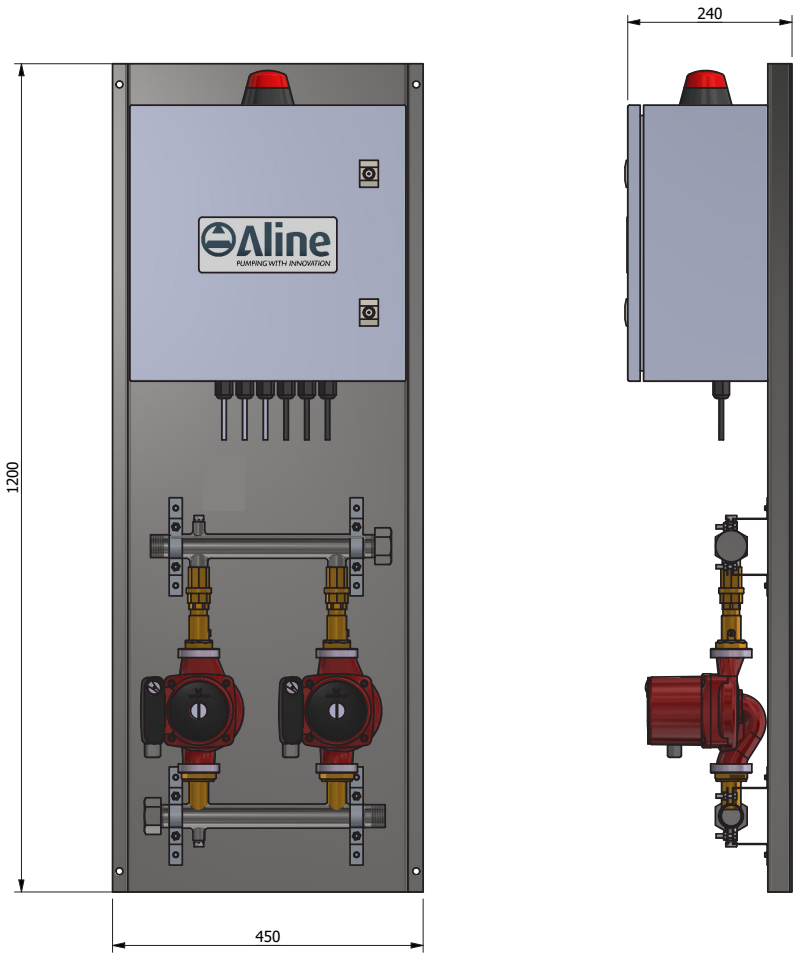

Hot Water Circulation

Dual 25-80N

Features & Applications


System

- Dual sanitary suitable hot water circulator pumps with brass non-return and isolation valves plus dual manifold assembly
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

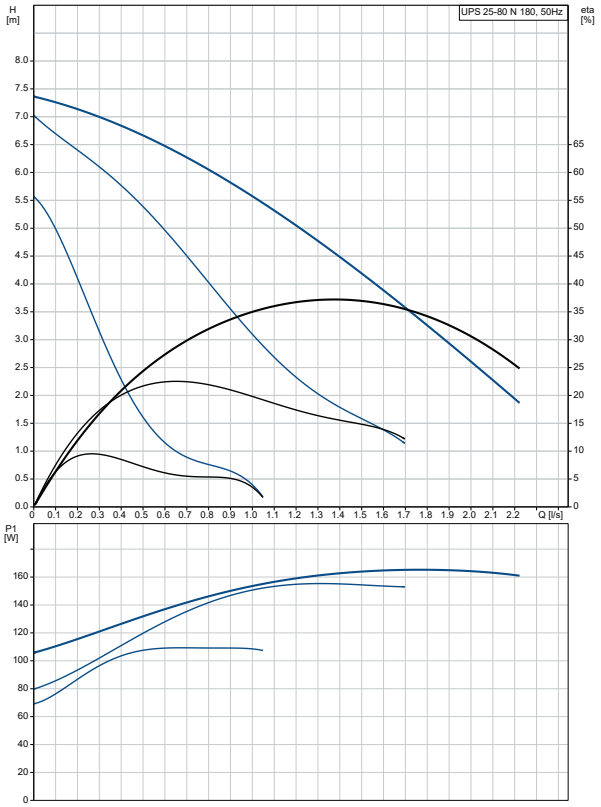

Dimensions

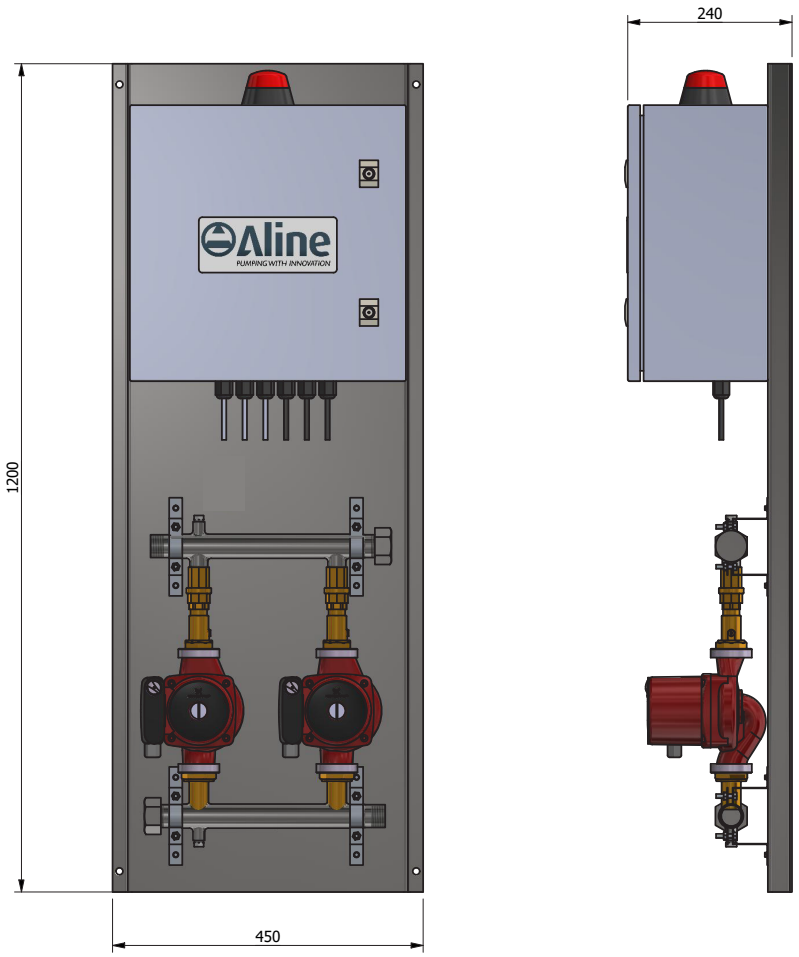

JAVELIN HOT WATER PUMPS

Visit our website for further details www.alinepumps.com.au

Features & Applications


System

- Dual sanitary suitable hot water circulator pumps with brass non-return and isolation valves plus dual manifold assembly
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

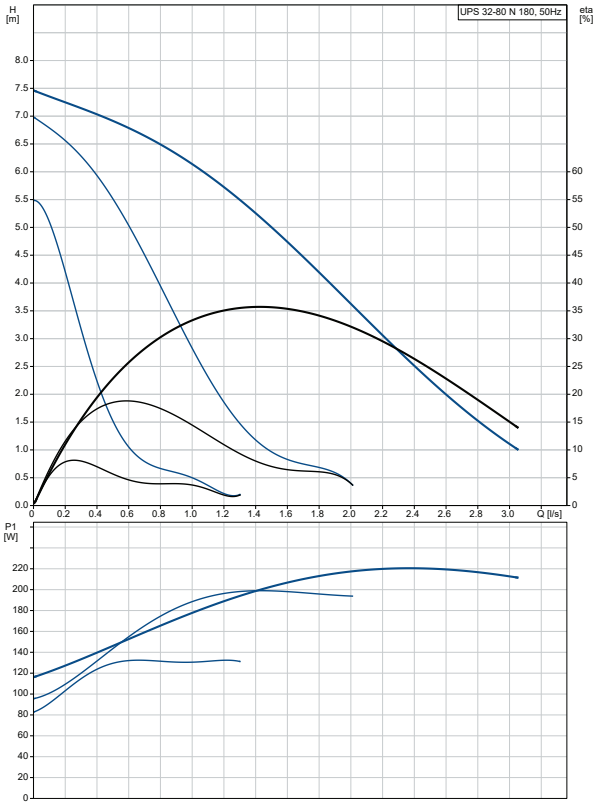

Dimensions

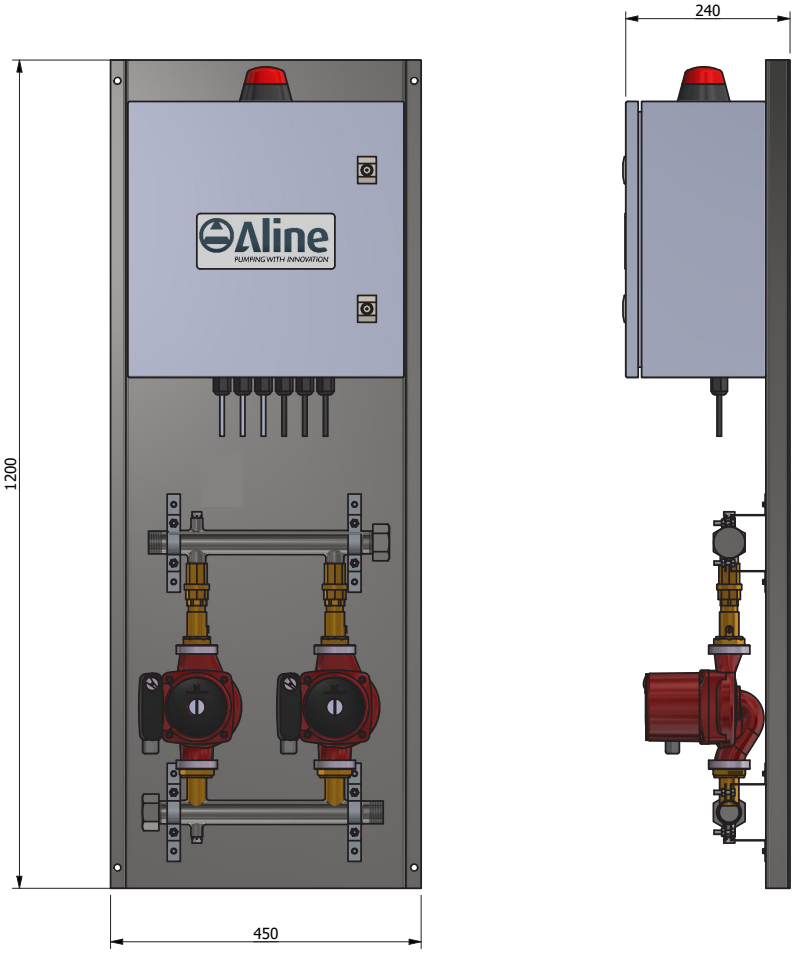

Features & Applications


System

- Dual sanitary suitable hot water circulator pumps with brass non-return and isolation valves plus dual manifold assembly
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

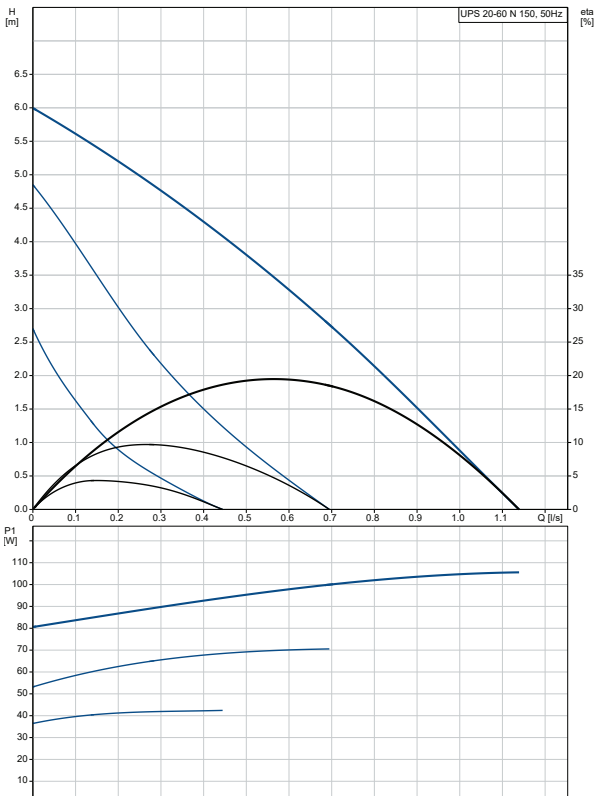

Dimensions

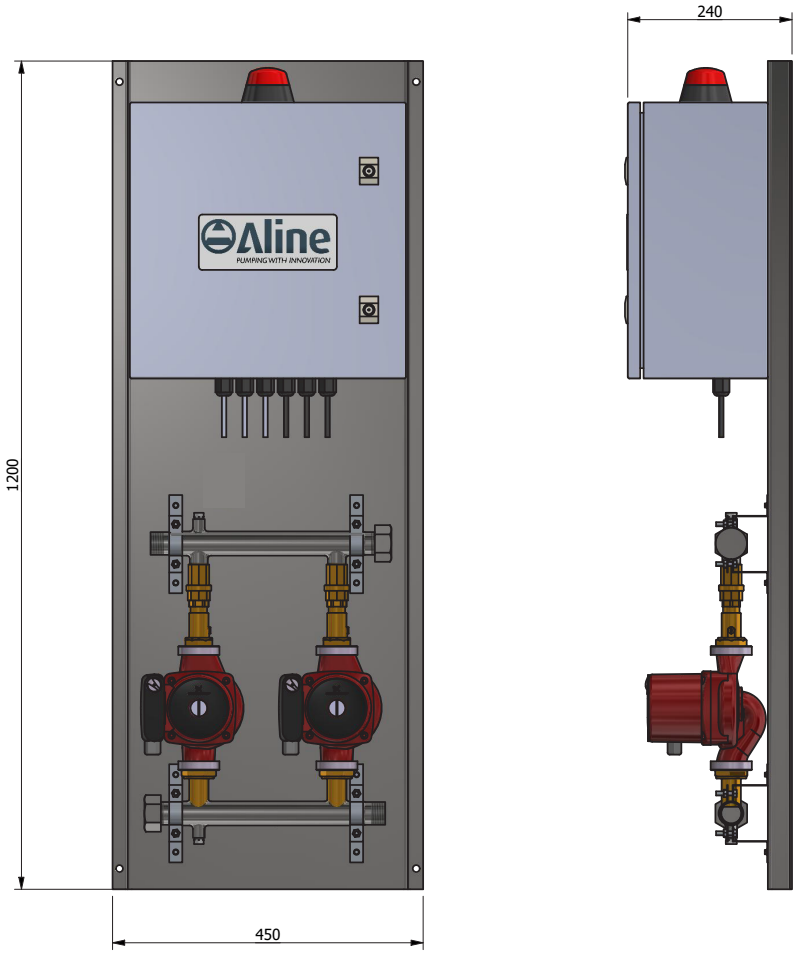

Features & Applications


System

- Dual sanitary suitable horizontal multistage pumps capable of higher flows and head
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation


Controller


- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure


Performance

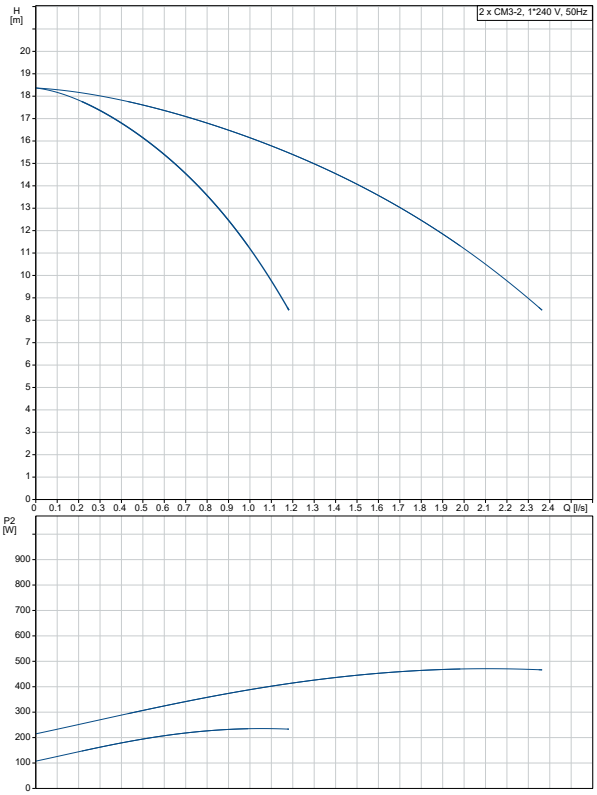


Dimensions

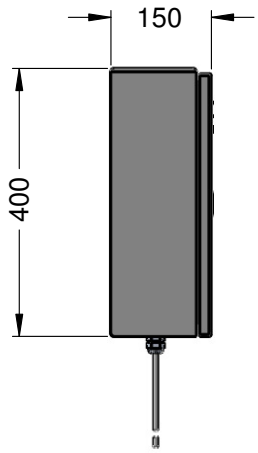

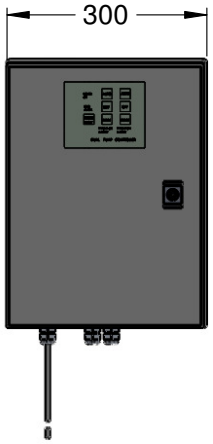

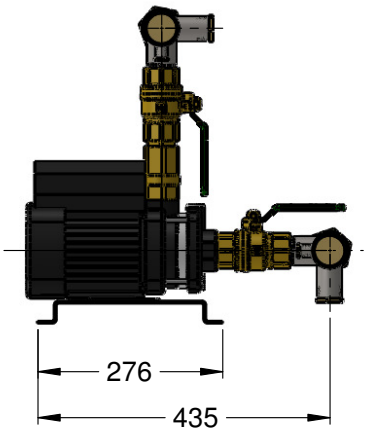

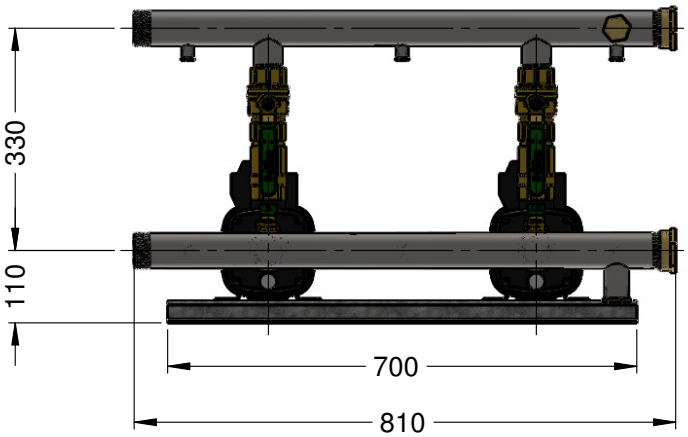

Features & Applications


System

- Dual sanitary suitable horizontal multistage pumps capable of higher flows and head
- Mains connection 1~240 V, 50 Hz
- Galvanized steel base frame suitable for wall mount installation

Controller

- Individual pump operation and common fault lights
- BMS connections as available
- Integrated motor overload control, automatic reset after mains power failure

Performance

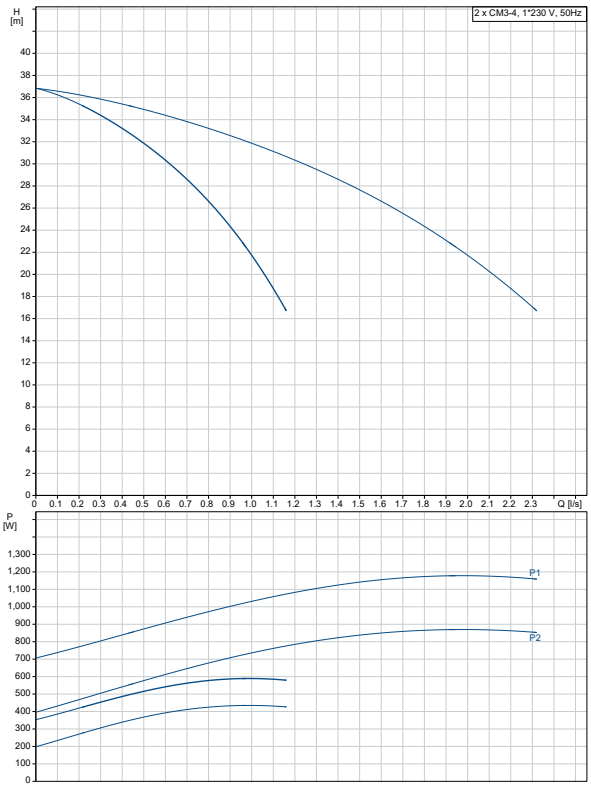

Dimensions

