Product Description

Submersible pump consisting of a solids handling grinder inlet with a high head open impeller to pump waste water containing soft solids in suspension

Applications

- Grey & Black water pumping
- Sump emptying
- Septic effluent & sewage disposal
- Pumping of waste water with soft solids in suspension

Features

- Heavy duty shredding & grinding ring at inlet
- Centrifugal design, open impeller
- Able to pump soft organic solids, sanitary products and even textiles in suspension by shredding to a slurry
- Open impeller prevents blockage of the pump by small solid in the slurry
- High heads and small solids allow connection to small discharge pipe systems, especially suited to pumping waste water to pressure sewer mains



Suitable Fluids

Clean or 'grey water' of neutral pH containing up to 20% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension

Features & Benefits


Submersible grinder pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, pumping liquids with soft solids, agricultural liquid wastes and applications with high static heads &/or long distances.

- Dual mechanical seal
- Semi-open impeller
- Heat treated 440 Stainless Steel grinder and grinding ring
- 403 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



These are 240V manual pumps. Remember to order your control panel and floats

Performance Curve

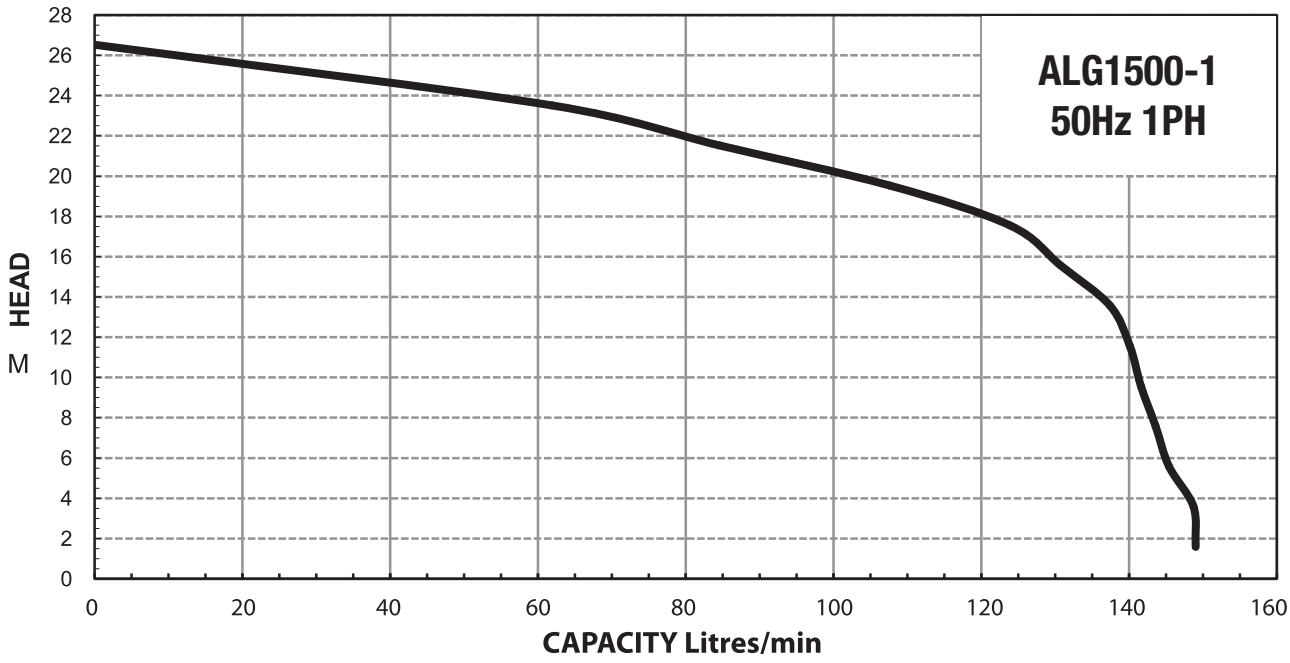

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	2.0	1.5	13	0°C to 40°C	240V	Manual	32	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		5M	10M	15M	20M	25M		L X W X H (MM)	
32	1-1/4"	150	145	141	130	100	25	25	285 x 203 x 597	36

Features & Benefits


Submersible grinder pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, pumping liquids with soft solids, agricultural liquid wastes and applications with high static heads &/or long distances.

- Dual mechanical seal
- Semi-open impeller
- Heat treated 440 Stainless Steel grinder and grinding ring
- 403 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

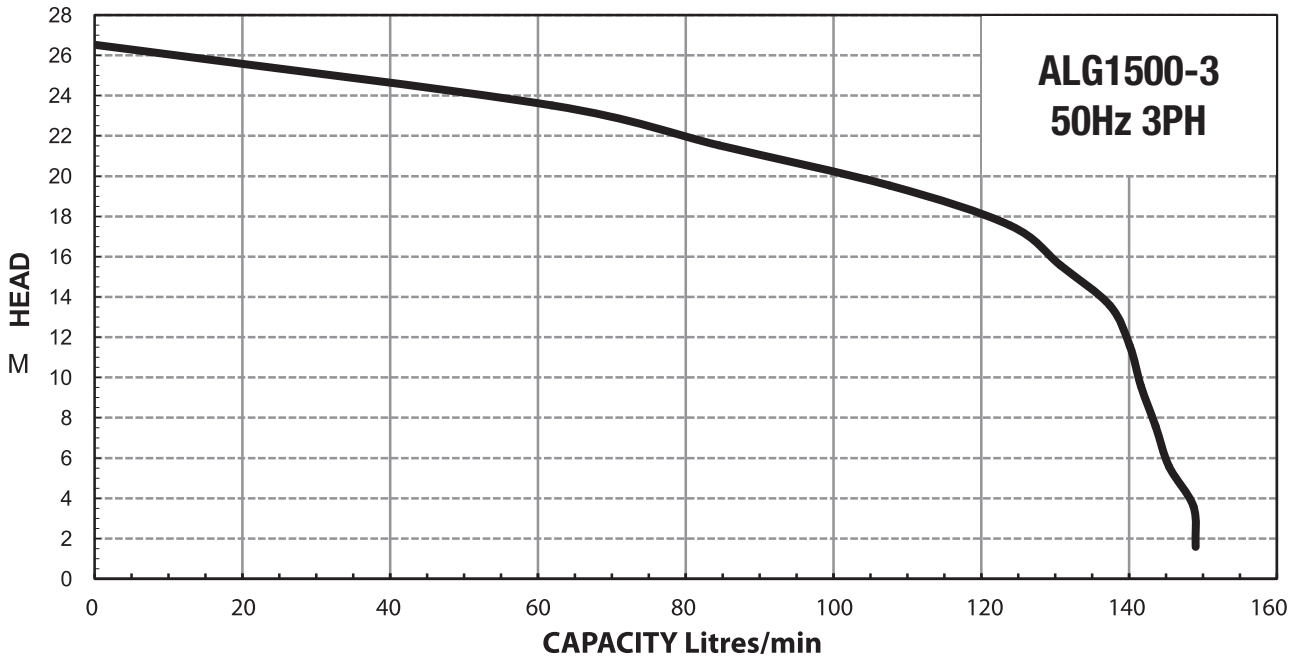

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	2.0	1.5	3	0°C to 40°C	415V	Manual	32	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		4M	6M	8M	10M	13M		L X W X H (MM)	
32	1-1/4"	150	145	141	130	100	25	25	285 x 203 x 597	36

Features & Benefits


Submersible grinder pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, pumping liquids with soft solids, agricultural liquid wastes and applications with high static heads &/or long distances.

- Dual mechanical seal
- Semi-open impeller
- Heat treated 440 Stainless Steel grinder and grinding ring
- 403 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

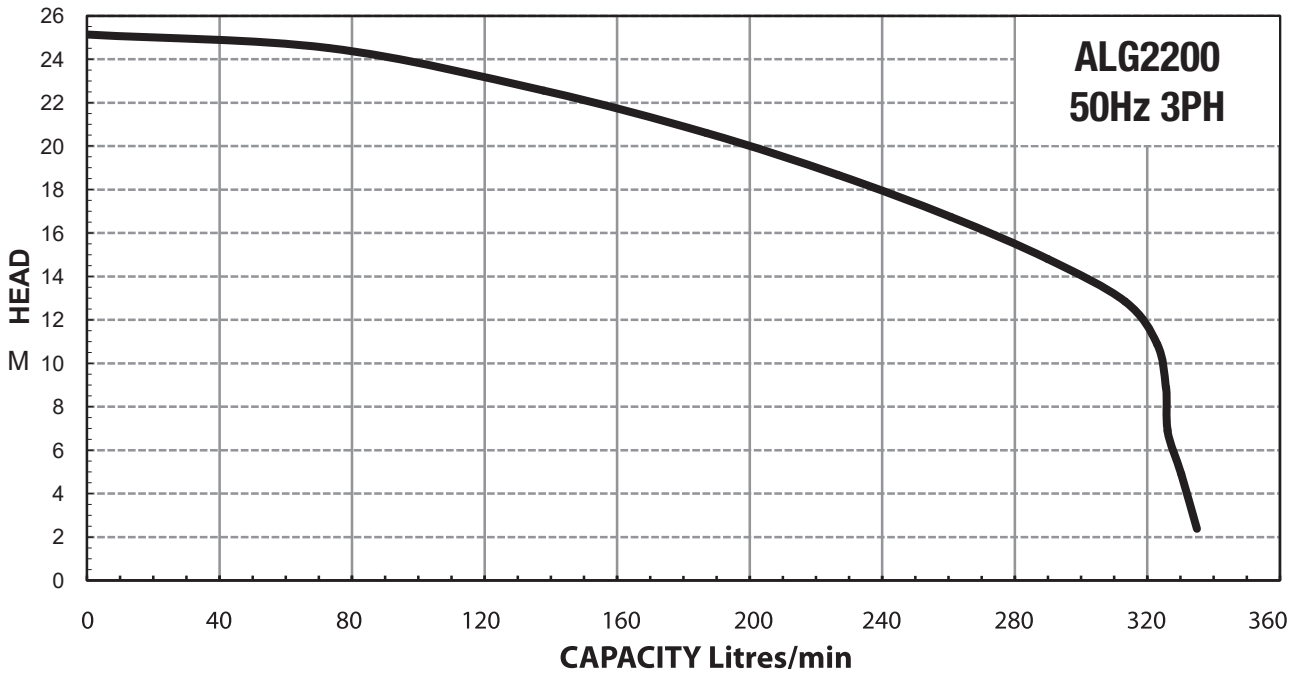

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	3.0	2.2	4.5	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		4M	8M	12M	18M	24M		L X W X H (MM)	
50	2"	330	330	330	320	240	85	25	393 x 226 x 616	52

Features & Benefits


Submersible grinder pump particularly suited for raw sewage transfer, light sludges and slurries, trade waste disposal, grey water and septic transfers, pumping liquids with soft solids, agricultural liquid wastes and applications with high static heads &/or long distances.

- Dual mechanical seal
- Semi-open impeller
- Heat treated 440 Stainless Steel grinder and grinding ring
- 403 Stainless Steel motor shaft
- 30M maximum submersible depth
- Dual Carbon/Ceramic and Silicon mechanical seal



These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

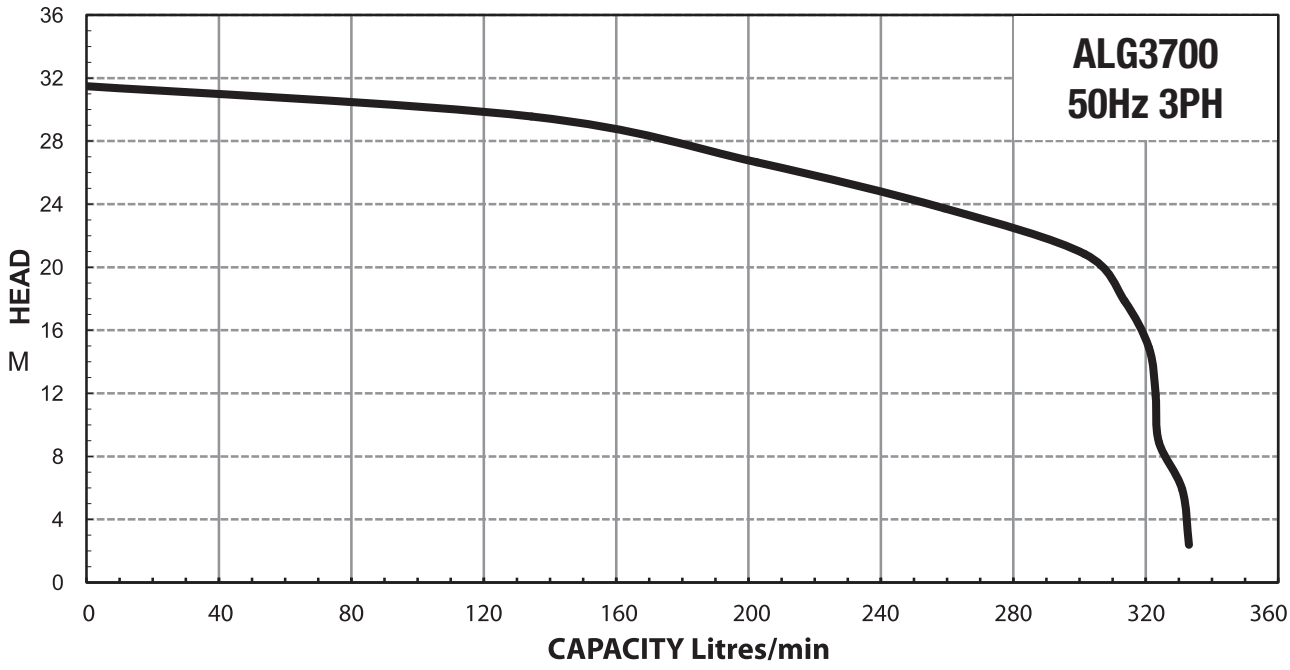

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	5.0	3.7	7.5	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		6M	12M	18M	24M	30M		L X W X H (MM)	
50	2"	330	330	325	315	250	80	30	393 x 226 x 616	53