Product Description

Submersible pump consisting of a solids handling grinder inlet with a high head open impeller to pump waste water containing soft solids in suspension

Applications

- Grey & Black water pumping
- Sump emptying
- Septic effluent & sewage disposal
- Pumping of waste water with soft solids in suspension

Features

- Heavy duty shredding & grinding ring at inlet
- Centrifugal design, open impeller
- Able to pump soft organic solids, sanitary products and even textiles in suspension by shredding to a slurry
- Open impeller prevents blockage of the pump by small solid in the slurry
- High heads and small solids allow connection to small discharge pipe systems, especially suited to pumping waste water to pressure sewer mains



Suitable Fluids

Clean or 'grey water' of neutral pH containing up to 20% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension


Features & Benefits

Submersible drainage pump particularly suited for higher pressure drainage applications.

- Hardened 440 stainless steel shredding ring and grinding impeller
- Cast iron ASTM A48 Class 30
- Semi-open impeller prevents clogging
- Ductile iron impeller for superior quality and long life
- Both ends of the pump are protected by a single silicon carbide mechanical shaft seal with a back up lip seal
- Thermal overload protection mounted directly on the windings to protect against overheating
- Oil-filled motor for better cooling
- 1-1/4" BSP discharge

These are 240V manual pumps. Remember to order your control panel and floats

Performance Curve

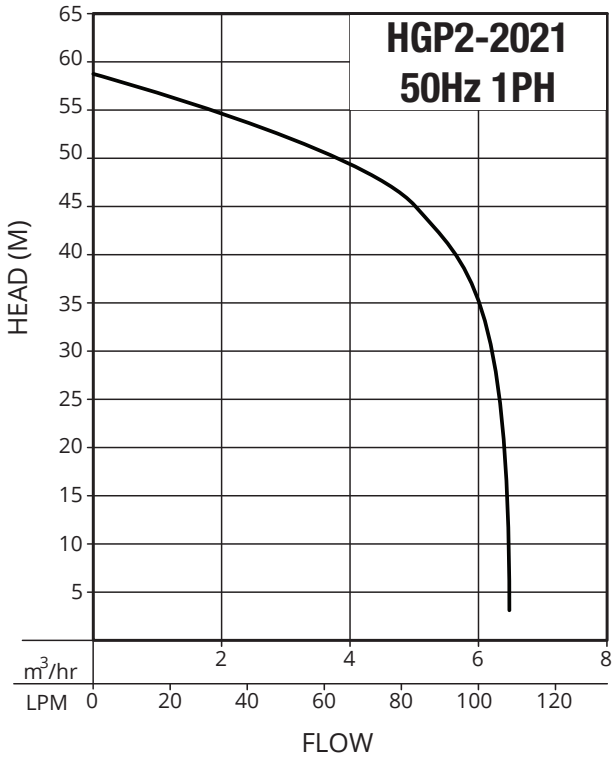



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	2.0	1.5	18	0°C to 40°C	240V	Manual	32	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		20M	40M	45M	50M	55M		L X W X H (MM)	
32	1 1/4"	105	105	92	83	62	30	57	334 x 246 x 661	62


Features & Benefits

Submersible drainage pump particularly suited for higher pressure drainage applications.

- Hardened 440 stainless steel shredding ring and grinding impeller
- Cast iron ASTM A48 Class 30
- Semi-open impeller prevents clogging
- Ductile iron impeller for superior quality and long life
- Both ends of the pump are protected by a single silicon carbide mechanical shaft seal with a back up lip seal
- Thermal sensor protection mounted directly on the windings to protect against overheating
- Oil-filled motor for better cooling
- 1-1/4" BSP discharge

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

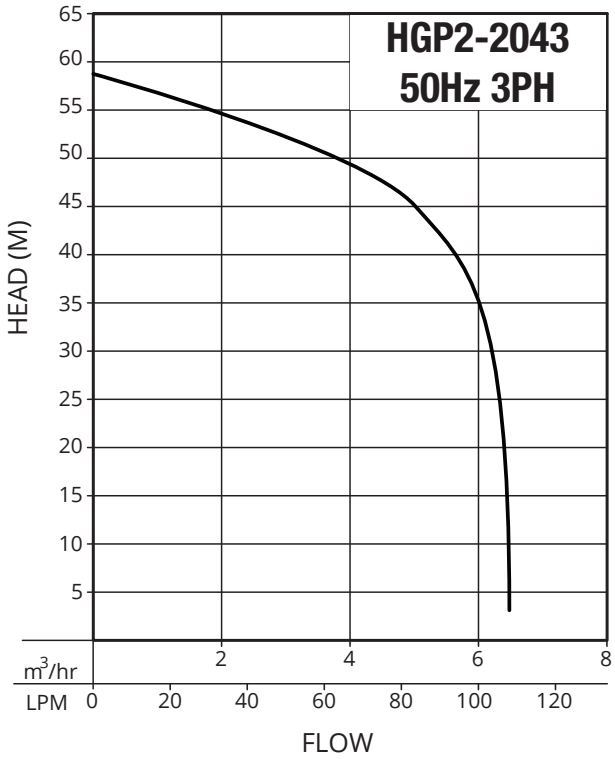



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	2.0	1.5	6	0°C to 40°C	415V	Manual	32	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		20M	40M	45M	50M	55M		L X W X H (MM)	
32	1 1/4"	105	105	92	83	62	30	57	334 x 246 x 661	62


Features & Benefits

Submersible drainage pump particularly suited for higher pressure drainage applications.

- Hardened 440 stainless steel shredding ring and grinding impeller
- Cast iron ASTM A48 Class 30
- Ductile iron semi-open impeller prevents clogging and provides superior quality and long life
- Both ends of the pump are protected by tandem carbon / ceramic and silicon carbide mechanical seal
- Thermal sensor is mounted directly on the windings for maximum temperature sensing
- Moisture probes for leak detection
- Oil-filled motor for better cooling and lubrication
- 2" BSP discharge

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

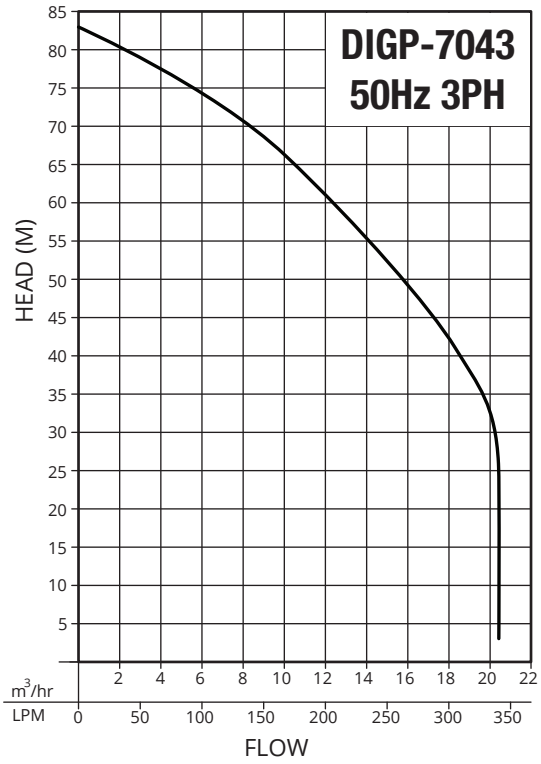



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Grinder	7.5	5.6	18	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (M)	DIMENSIONS	WEIGHT (KG)
MM	INCH		25M	45M	55M	65M	80M		L X W X H (MM)	
50	2"	340	340	280	235	175	30	81	359 x 247 x 713	98