Packaged Pump Stations

KPPS1200

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features & Benefits

CONSTRUCTION
- Polyethylene tank
- Inlet pipe to be installed by plumber
- All in-tank fittings incorporated in the packaged pump stations as follows:
  - Ball and non-return valves, barrel unions.
  - PVC interconnecting pipework

LIQUID HANDLED
- Raw sewage, Tradewaste, Effluent and Stormwater

PUMP OPTIONS
- Single, Dual Pumps

CONFIGURATION
- Freestanding
- Guide Rail

APPLICATIONS
- Single Dwellings
- Houses
- Pump-away applications
- Basement pump-away
- Civil developments
- Residential apartments
- Industrial complexes

Specifications

Depth	1600mm
Outer Diameter	1075mm
Inner Diameter	1000mm
Nominal Litres	1200L
Approximate Weight (Excluding pump)	62kg
Access Cover	600mm x 600mm




Approved for Wastewater Treatment
AS/NZS 1546.1 : 2008

**Product may differ from images*

KWIKFLO PUMP STATIONS & TRADE WASTE

Dimensions (mm)

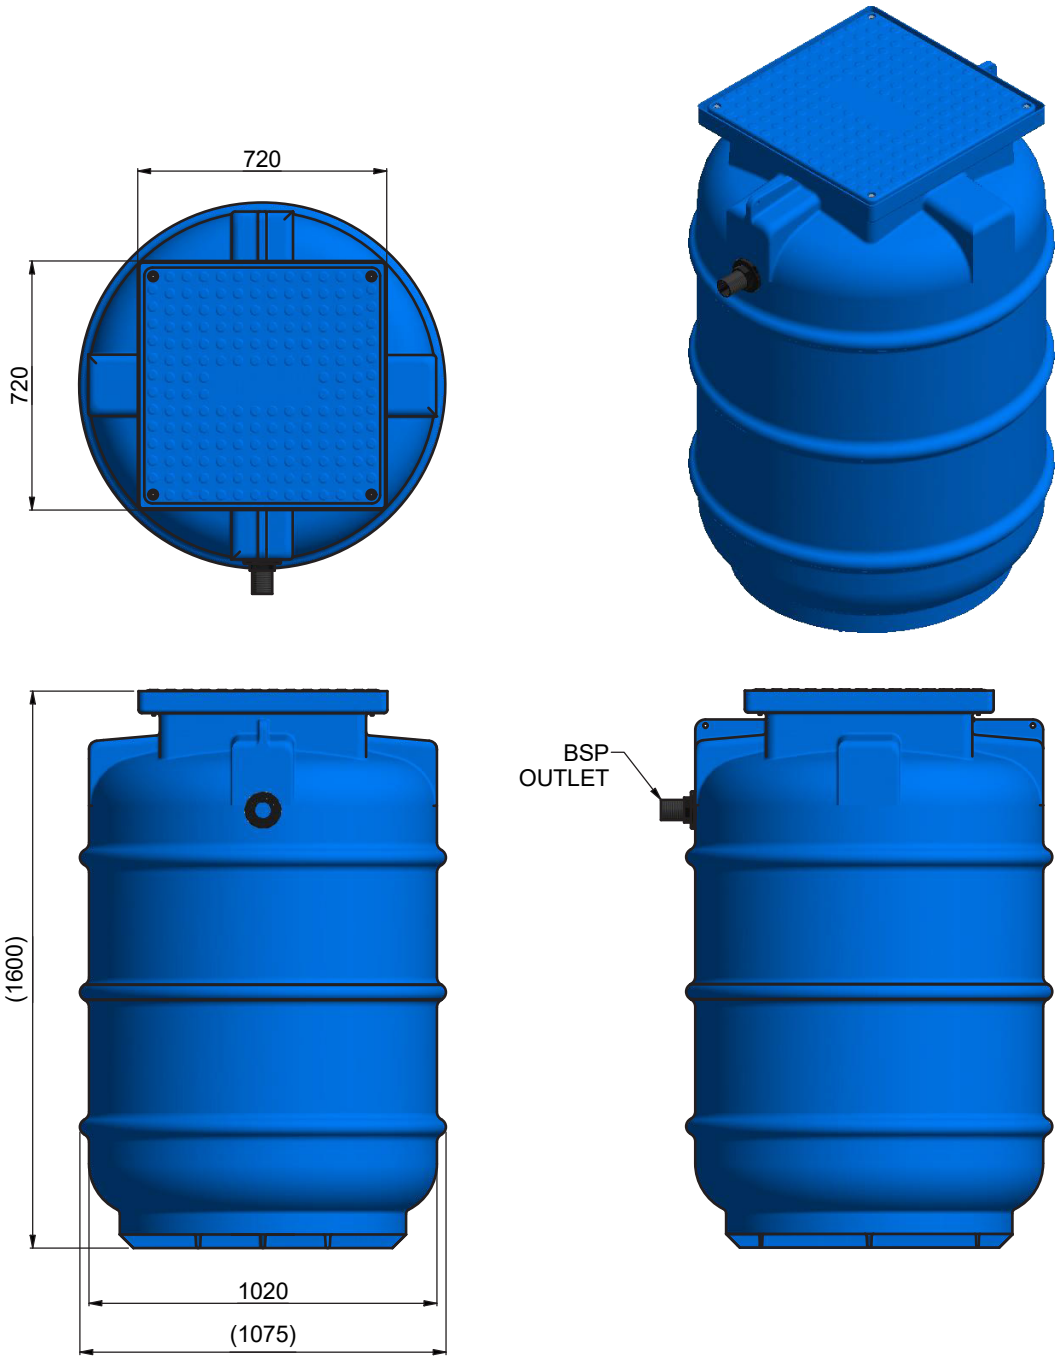

Standard Lid & Riser Options

(see "Access Covers" section)

Type	Weight	Height	Access Dimensions	Tank Lip
Poly (pictured)	5kg	50mm	600x600mm	Compatible
Galvanised Grate	25kg	50mm	600x600mm	Compatible
Solid Top - Class B	37kg	55mm	600x600mm	Remove
Solid Top - Class D	70kg	105mm	600x600mm	Remove
Poly Riser 150mm	5kg	150mm	600x600mm	Remove
Poly Riser 300mm	10kg	300mm	600x600mm	Remove