Packaged Pump Stations

KPPS3000

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features & Benefits

CONSTRUCTION
- Polyethylene tank
- Inlet pipe to be installed by plumber
- All in-tank fittings incorporated in the packaged pump stations as follows:
  - Ball and non-return valves, barrel unions.
  - PVC interconnecting pipework

LIQUID HANDLED
- Raw sewage, Tradewaste, Effluent and Stormwater

PUMP OPTIONS
- Single, Dual or Triplex Pumps

CONFIGURATION
- Freestanding
- Guide Rail

APPLICATIONS
- Large Houses
- Caravan Parks
- Amenities blocks
- Shopping centres
- Basement pump-away
- Civil developments
- Residential apartments
- Industrial complexes

Specifications

Depth	2220mm
Outer Diameter	1700mm
Inner Diameter	1580mm
Nominal Litres	3000L
Approximate Weight (Excluding pump)	220kg
Access Cover	600mm x 900mm




Approved for Wastewater Treatment
AS/NZS 1546.1 : 2008

**Product may differ from images*

KWIKFLO PUMP STATIONS & TRADE WASTE

Dimensions (mm)

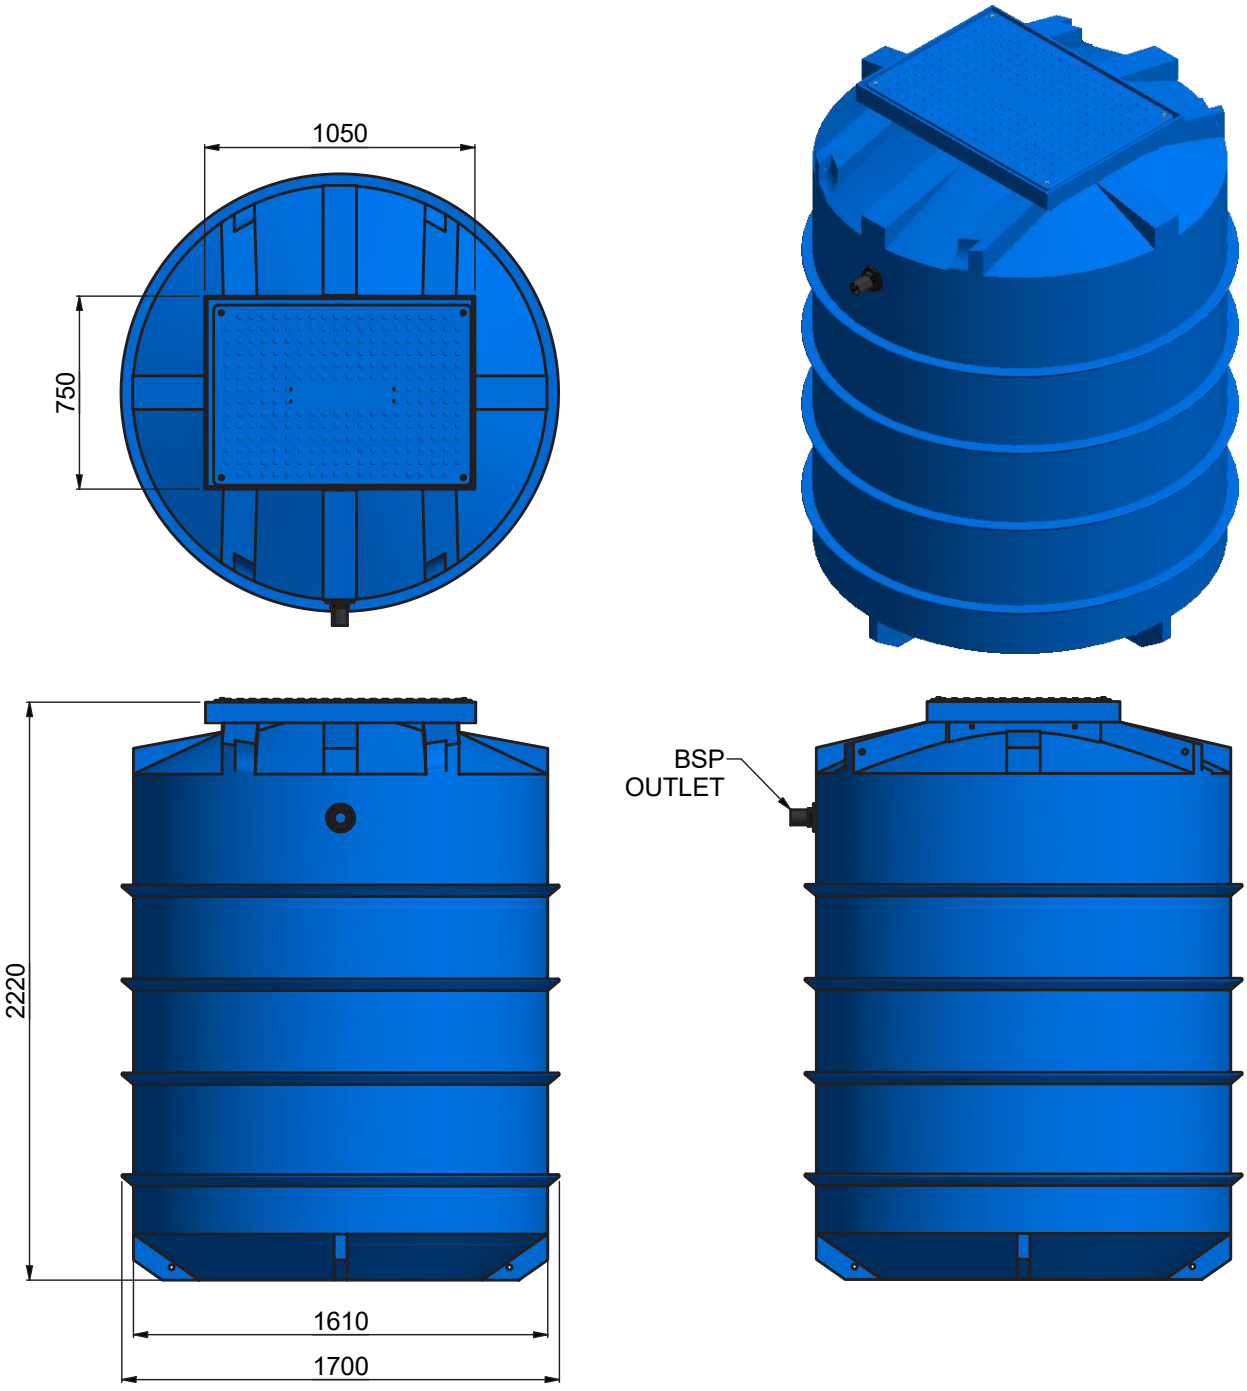

Standard Lid & Riser Options

(see "Access Covers" section)

Type	Weight	Height	Access Dimensions	Tank Lip
Poly (pictured)	10kg	50mm	600x900mm	Compatible
Solid Top - Class B	52kg	55mm	600x900mm	Remove
Solid Top - Class D	100kg	105mm	600x900mm	Remove
Poly Riser 150mm	10kg	150mm	600x900mm	Remove
Poly Riser 300mm	15kg	300mm	600x900mm	Remove