
TORPEDO SUBMERSIBLE PRESSURE PUMPS

Features


Submersible booster pump designed for the pumping of clean water for domestic and rainwater applications. The SBA submersible pump is silent when submerged and therefore a noiseless alternative to surface mounted pumps. Built of high quality composite and stainless steel materials that are resistant to corrosion, the SBA is ideal for operation in a well or ground tanks. Furthermore, the pump features a flow switch which ensures the user a convenient experience with automatic start/stop operation and dry running protection of the pump.

- Integrated control unit eliminates the need for an external pump controller
- Emits no noise when submerged and is therefore a noiseless alternative to non-submersible pumps
- Built of composite and stainless steel materials which are resistant to corrosion.

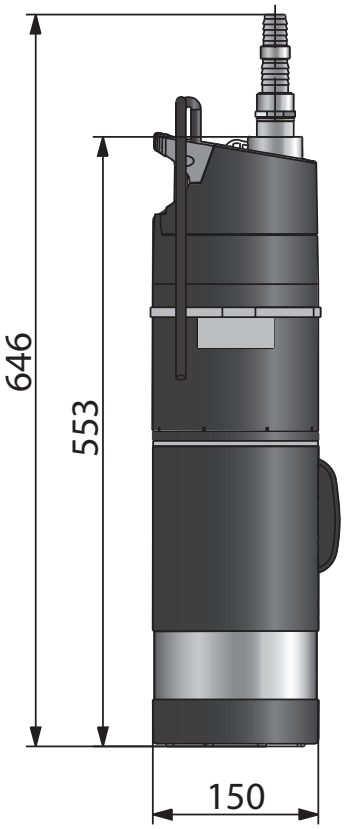

Specifications

Mains Voltage	240V
Insulation Class	B
Enclosure Class	IP68
Max Installation Depth	10M
Max Particle Size	1mm
Max Ambient Temperature	50 °C
Liquid Temperature	0 to 40 °C
pH Range	4-9

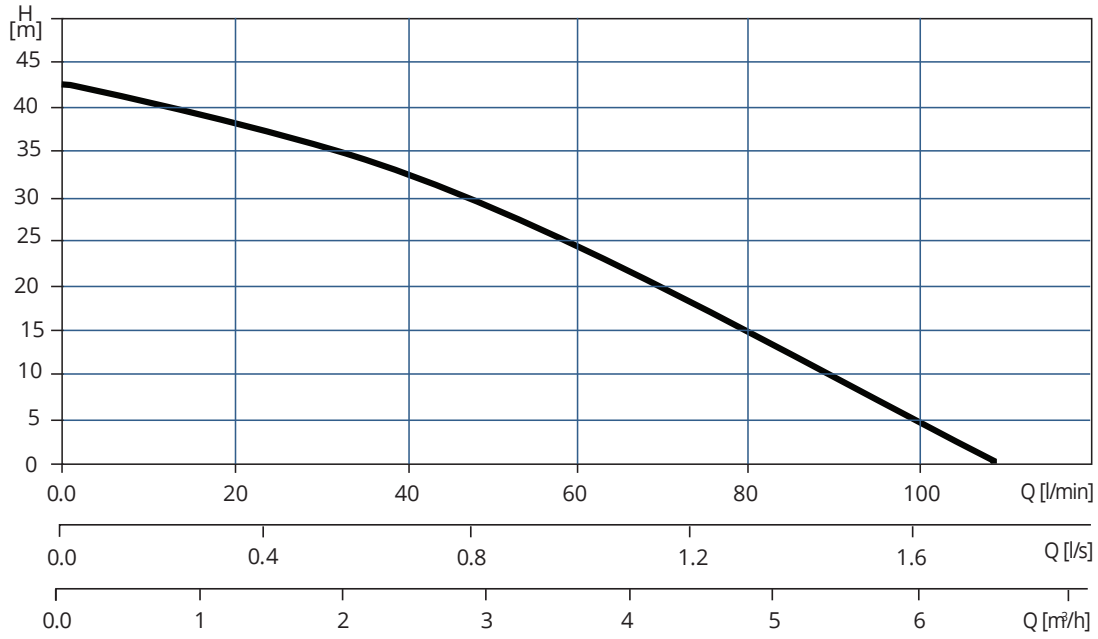


Features


Submersible self-priming booster pump ideal for remote and residential applications, the FWJ-204 is a completely pre-assembled system equipped with an electronic pump control unit. All parts exposed to the pumped liquid are corrosion-free and the mechanical seal is of carbon/ceramic construction. Well suited for water sprinklers, water distribution, irrigation and spraying and domestic hose use.

- Pump housing stainless steel 1.4301
- Impeller made of Noryl
- Shaft made of 1.4005 stainless steel
- Mechanical seal made of carbon/ ceramic
- Stage chambers made of Noryl
- Pressure monitor housing made of nylon PA6
- Diffuser/injector made of Noryl
- Seal made of NB

Specifications

Mains Voltage	240V
Max inlet pressure	1 Bar
Liquid Temperature	+5 to 35 °C
Max Operating Pressure	6 Bar
Protection Class	IP44
pH Range	6-8

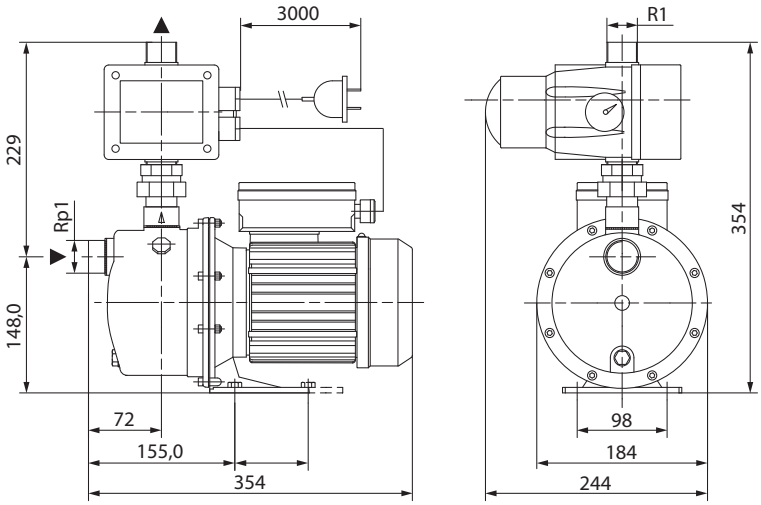

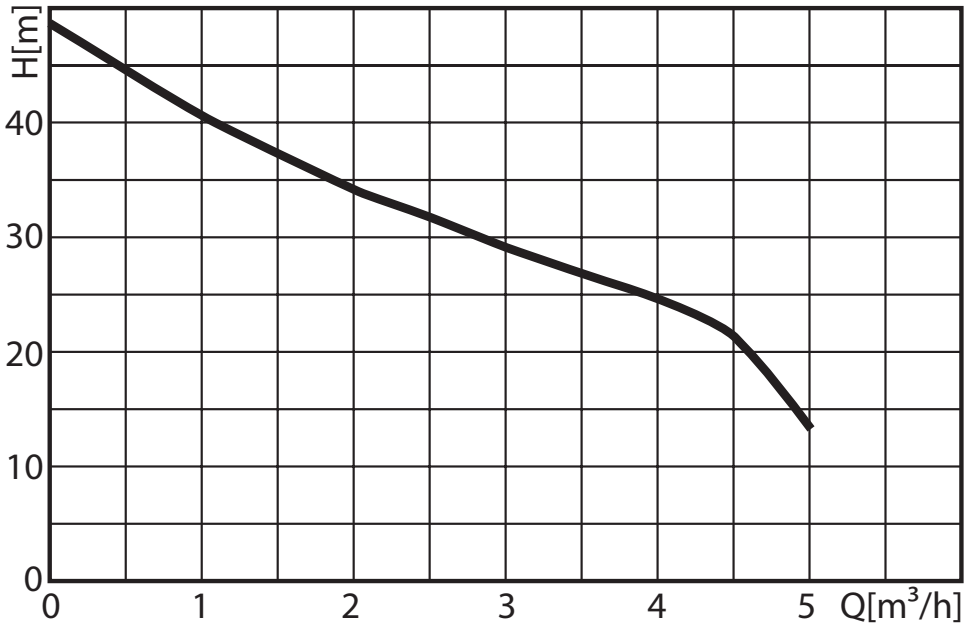

Features


A variable speed pump that adjust accordingly to water demand, resulting in lower running costs. All wetted components are constructed from high quality stainless steel ensuring, the water quality is not affected by pump materials. The pump will provide constant pressure at the tap (up to pump capacity), regardless of variation in demand or inlet pressure.

- All wetted parts are made from high quality stainless steel to ensure the longest life possible.
- The CME Booster operates quietly, at around 55 decibels, significantly quieter than most pumps currently available on the market.
- The CME Booster features dry run protection and built in thermal overload protection to automatically stop the pump if the water source runs out.



Specifications

Mains Voltage	240V
Insulation Class	F
Enclosure Class	IP55
Max System Pressure	10 bar
Max Sound Level	<55dB
Max Ambient Temperature	55 °C
Liquid Temperature	0 to 60 °C

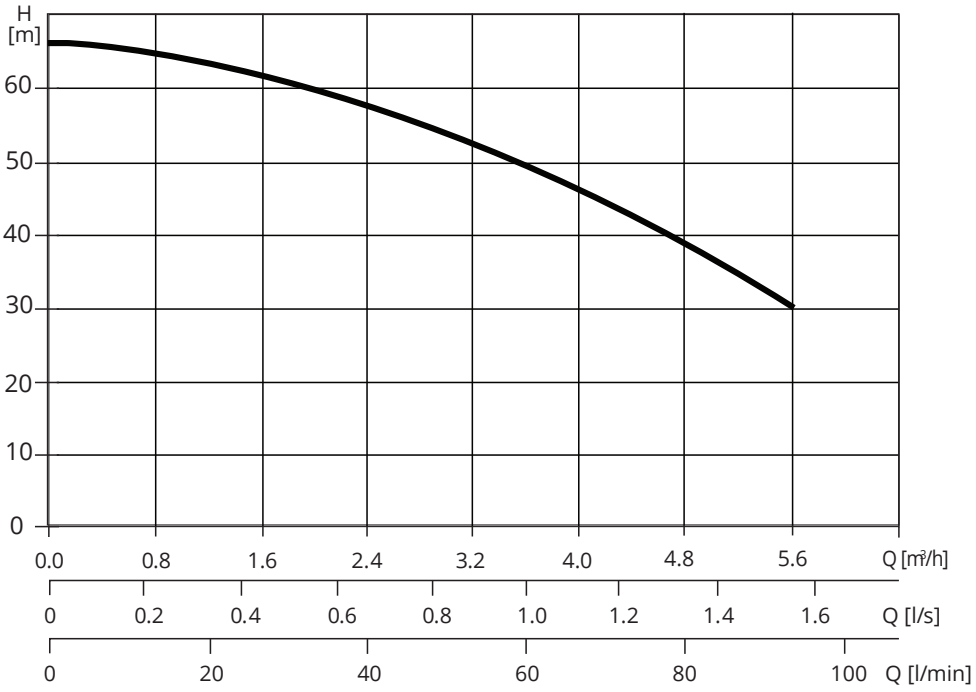

Features

- Water cooled motor and sound dampening casing
- Self priming down to 8 Metres
- Dry running protection
- Flexible installation with Horizontal or vertical position and wall mounting accessory kit
- Variable positions for inlet and outlet pipework
- Integrated chamber with expansion vessel, tool kit and installer manual
- Wireless connectivity and modular design can expand the pump system up to a 4 pump booster set
- Integrated modular water storage tank system with Cat 5 connection



Specifications

Mains Voltage	240V
Insulation Class	F
Enclosure Class	IP44
Max System Pressure	8 bar
Max Ambient Temperature	50 °C
Max Liquid Temperature	40 °C

