Water Storage Tanks

Aline Water Storage tanks are a complete water storage solution for any environment or remote location. A range of square and round steel storage tanks are offered to accommodate your practical needs. Both varieties feature bolt reinforcement and are designed to hold large capacities of water for heavy-duty building services, agricultural and industrial uses. Common applications include:

- Fire Water Storage
- Domestic potable water storage for large buildings
- Rain water reuse
- Rural water reserves for farms
- Treated water for commercial interests
- Waste storage for industrial plants

Construction Variants

Solid Steel

These are fully bolted floor, wall and roof tanks made of either stainless steel, galvanised or galvanised and powder coated tanks.

Liner

These tanks have the same wall and roofing as the above solid tanks, but with the primary containment being a polypropylene or butynol liner.

Combination

These tanks use the same sealed wall as the solid tanks but use a liner floor sealed to the tank bottom.

Installation Examples





Square Water Storage Tanks

The modular construction and bolted design of the Aline Group square tank lends itself to speedy production and reduced lead times. The panels nest within themselves and the system is perfect for delivery to remote hard reach locations such as tight plant rooms, basements or even carried to the top of a building. The tanks can also be built off-site and crane lifted onto the top of a building or tower to provide elevated storage. With flat panel design you have a device that can be easily cleaned, extended or even moved to another location. All tanks are have full material traceability and dimensional accuracy and are designed and built to relevant standards including; AS 1365, AS 1397, AS 3990, AS 1210, AS 2304, AS 1170, AS 2419, AS 3902

Square tanks can be manufactured in galvanized steel, 304 stainless steel or 316 stainless steel depending on your sanitary needs.

Features & Benefits

Materials

- Galvanised steel
- Stainless steel 304 2B & 316 2B
- Powder coated Galvanised Steel (standard Dulux range)

Outlet


- Galvanised steel SS304 or SS316 Nozzles
- Standard nozzles (flanged, screwed, roll groove) 15mm – 250mm
- Non-standard fittings available

Fittings

- Roof and side manways & external ladder
- Inlet, outlet, overflow and drain

Roofing

- Trimclad Zincalume/Colorbond sheets
- Galvanised Solid (up to 3.0m)
- SS304/SS316 Solid (up to 3.0m)

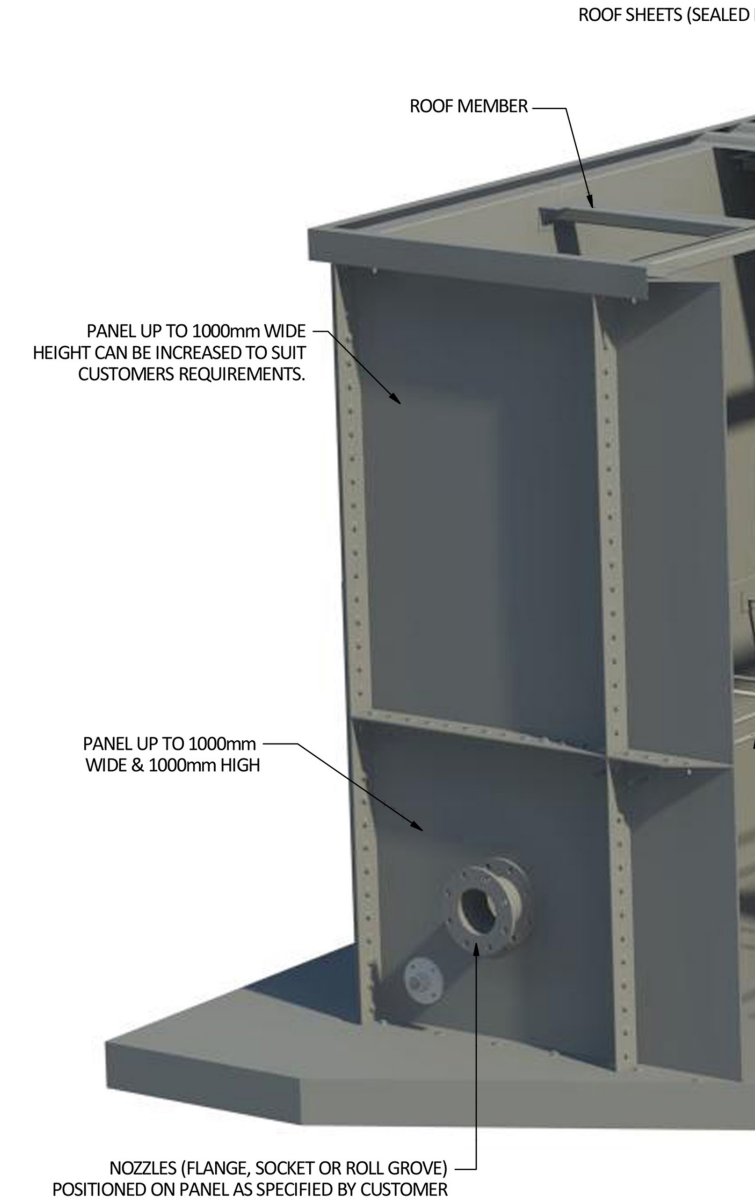

Installation Example



