
The StormWarden® Battery Backup System

When mains power fails, standard stormwater pump systems will cease to function. To prevent this, Aline stocks a specifically designed battery backup system called StormWarden®. The battery backup system is a packaged unit incorporating an inverter with a bank of batteries to provide electric power for stormwater systems in the event of mains power failure. A purpose built control unit detects a power failure and the system automatically switches supply to the pump set to battery power until the mains power is restored. The systems are available in a range of sizes to cater for specific requirements, depending on pump size and required standalone runtime.

Intelligent Controller

Provides continuous monitoring of mains power and automatically switches to battery power in the event of a mains power failure. It then automatically reverts to mains power and begins re-charging the batteries when the power supply is restored.

Typical StormWarden® Setup

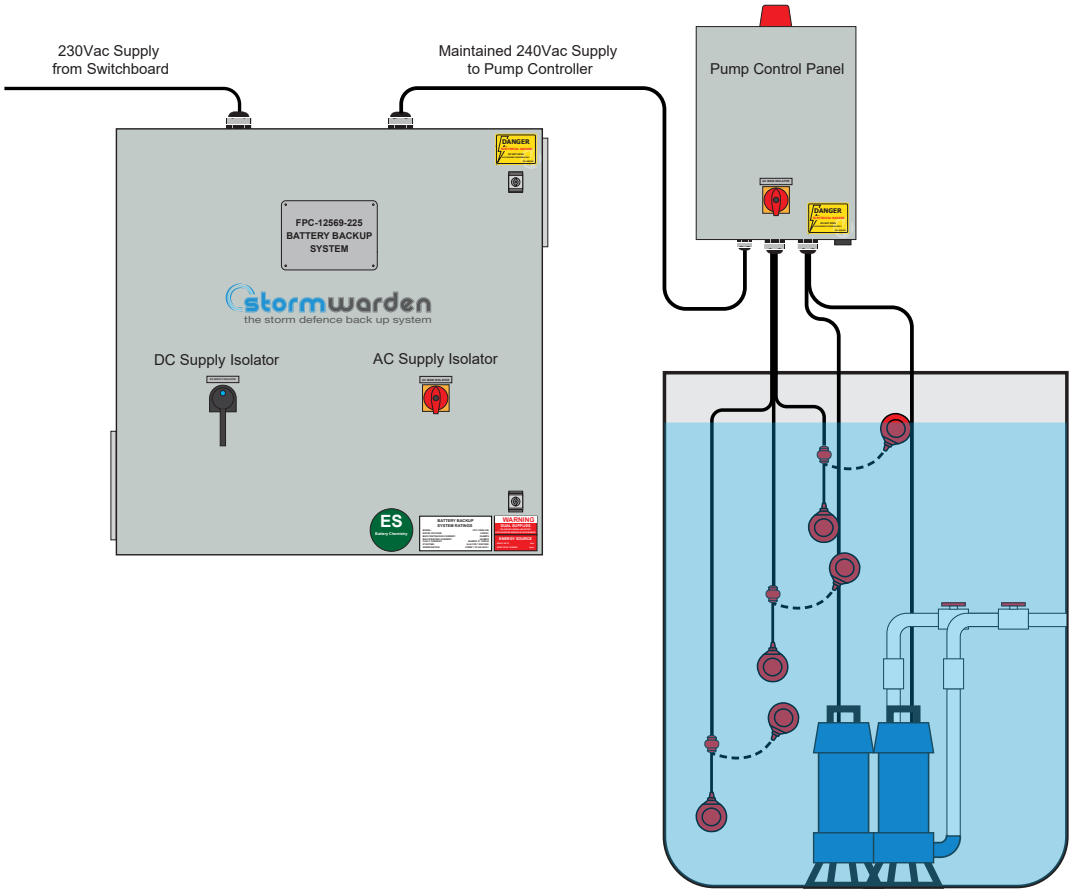

StormWarden® Battery Backup

Overview



System Features

- Protection against flooding
- Silent operation
- Fully automatic operation for peace of mind when away for extended periods
- Can be retro-fitted to existing pump systems
- No continuous maintenance required – no fuel or lubricants needed
- Supplied in compact enclosures for space saving and streamlined installation
- Size and run time variants available



StormWarden® Battery Backup

Specifications

Enclosure

- IP44 rated
- Powder coated mild steel
- Removable gland plates
- Integral ventilation

Protection

- Padlock-able AC mains power isolator switch
- Padlock-able DC battery isolator switch
- Battery protection fuse
- Din rail mounted terminal connections

Control & interface

- Battery charger
- Power monitor
- Power inverter (6kVA)

Inputs

- Single phase (240Vac) mains power supply

Outputs

- Single phase (240Vac) power supply output

Included with System

- Built in batteries for 24Vdc supply to 6kVA inverter



Features

- Provides constant 240Vac power to a pump controller or alternative control panel
- Automatic changeover of power source on mains failure
- Automatic change back to mains supply when available again
- Automatic battery charging whilst mains is connected
- Intelligent over current protection, electronic sensitivity
- DC battery source fusing
- Battery low voltage protection prevents batteries from going completely flat

Dimensions

Size	kVA Rating	Amp Hours	Enclosure Size
Small	6 kVA	225 A/h	800x800x300mm
Large	6 kVA	450 A/h	800x800x300mm & 800x600x300mm (two panels)

Run times (single pump only)

225 A/h StormWarden® Battery Backup

Pump Size	Amp Draw	Run time
0.25kW	2.5Amps	360mins
0.37kW	3.3Amps	260mins
0.55kW	5.0Amps	160 Mins
0.75kW	6.4Amps	125 Mins
1.1kW	9.0Amps	75 Mins
1.5kW	11.5Amps	55 Mins

450 A/h StormWarden® Battery Backup

Pump Size	Amp Draw	Run time
0.25kW	2.5Amps	720mins
0.37kW	3.3Amps	520mins
0.55kW	5.0Amps	320 Mins
0.75kW	6.4Amps	250 Mins
1.1kW	9.0Amps	150 Mins
1.5kW	11.5Amps	110 Mins