

TORPEDO SUBMERSIBLE PRESSURE PUMPS

Features

The three phase C series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

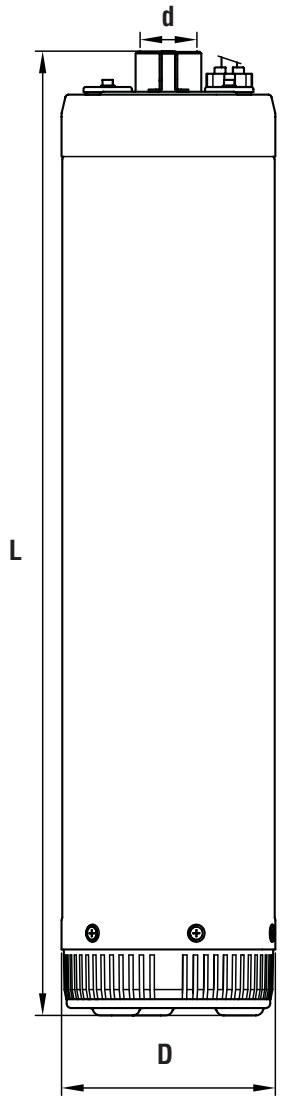

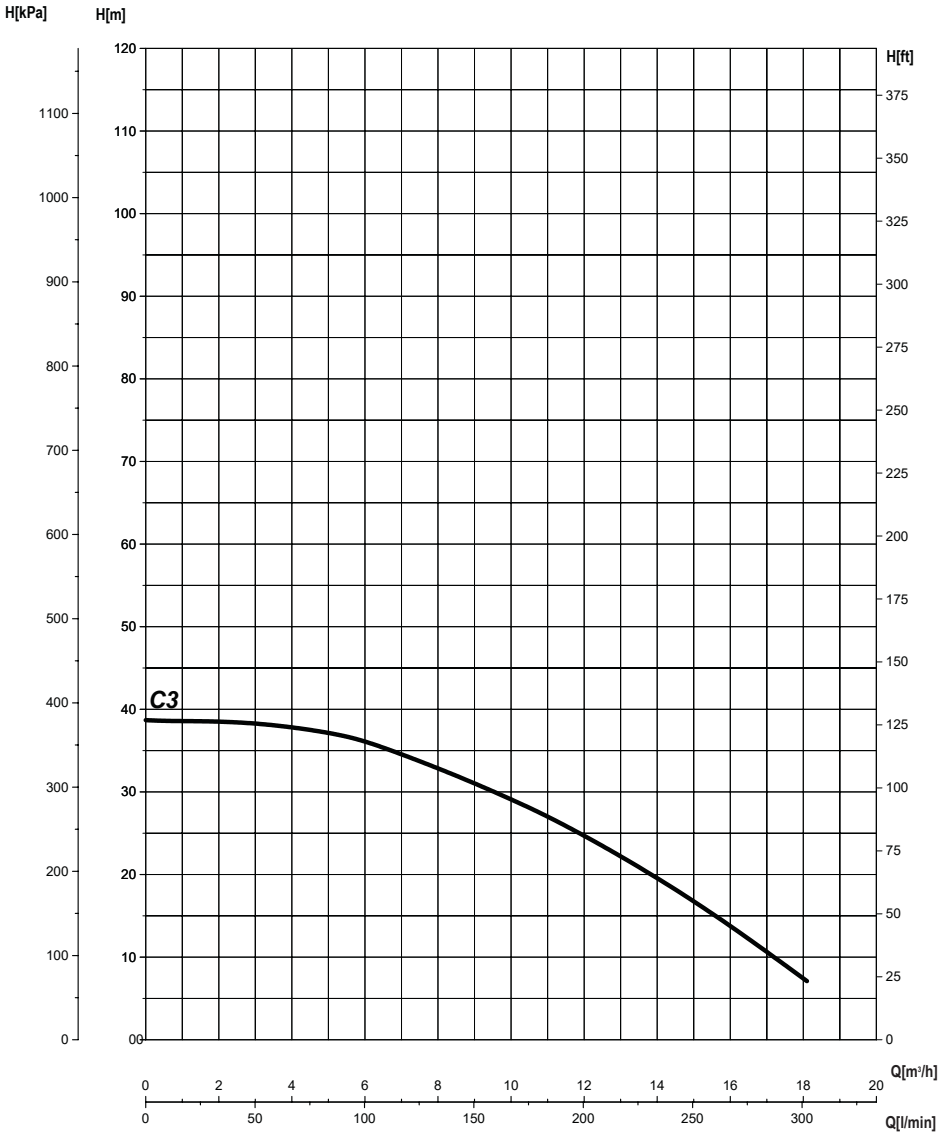


kW	HP	A @ 415V	DIMENSIONS			KG
			D	d	L	
1.5	2.0	3.2	143	1 1/4”	559	21.8

Features

The three phase C series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

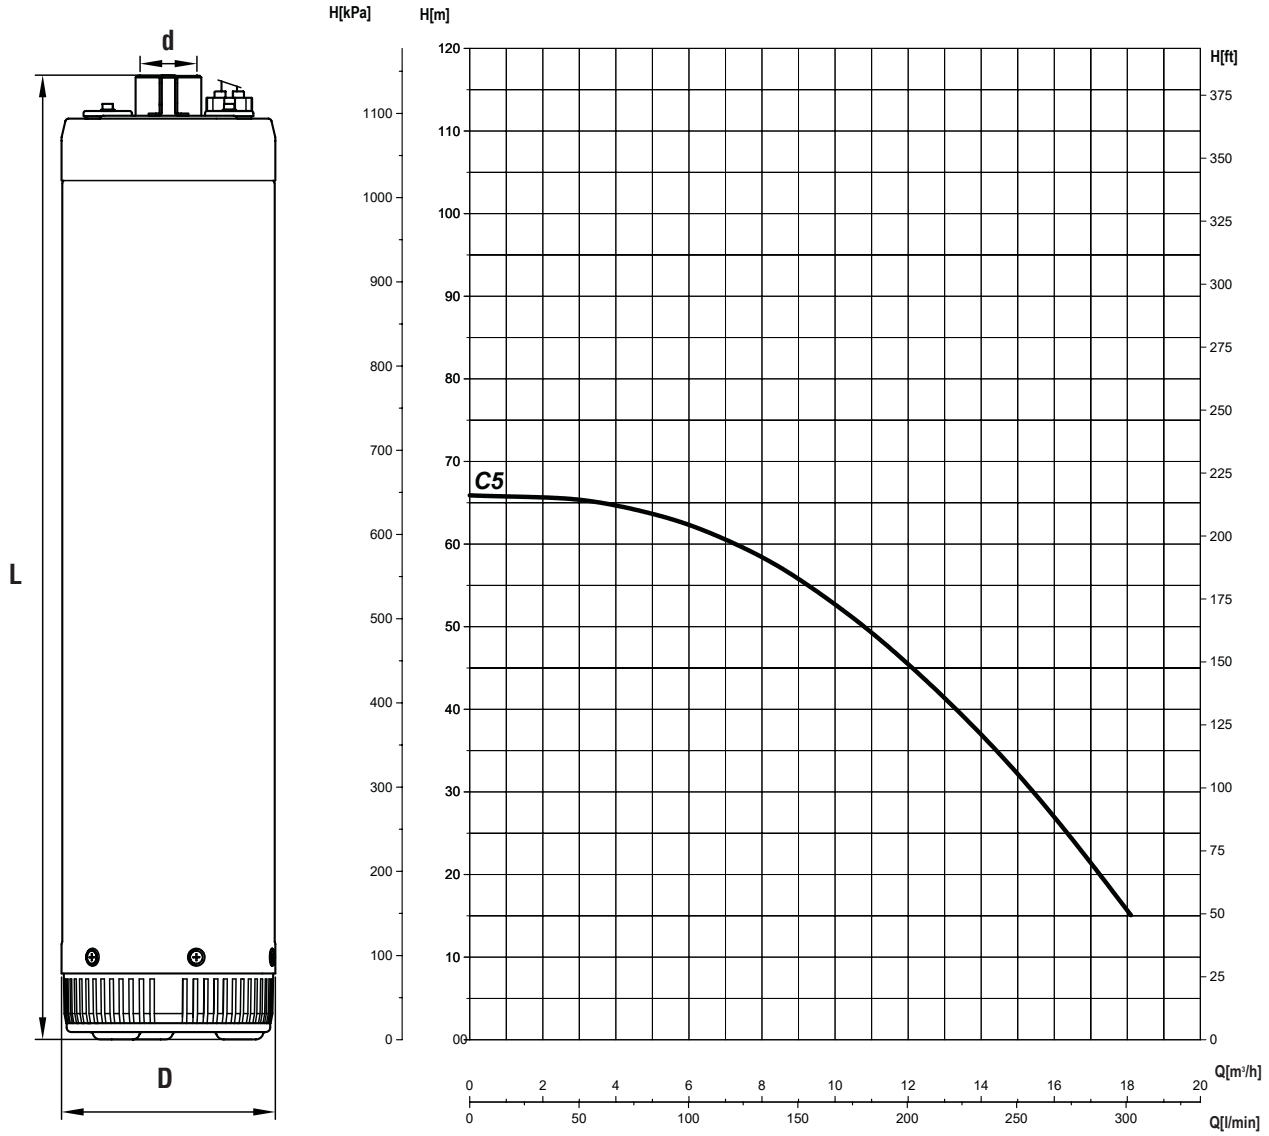


kW	HP	A @ 415V	DIMENSIONS			KG
			D	d	L	
2.2	3.0	5.3	143	1 1/4”	651	27.8


TORPEDO SUBMERSIBLE PRESSURE PUMPS

Features

The three phase C series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

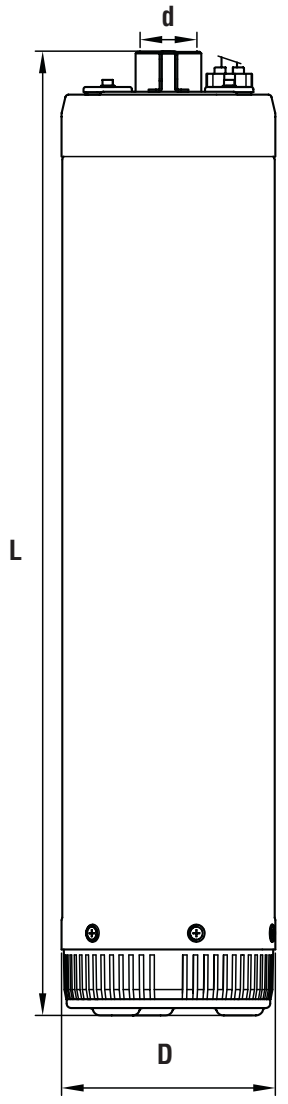

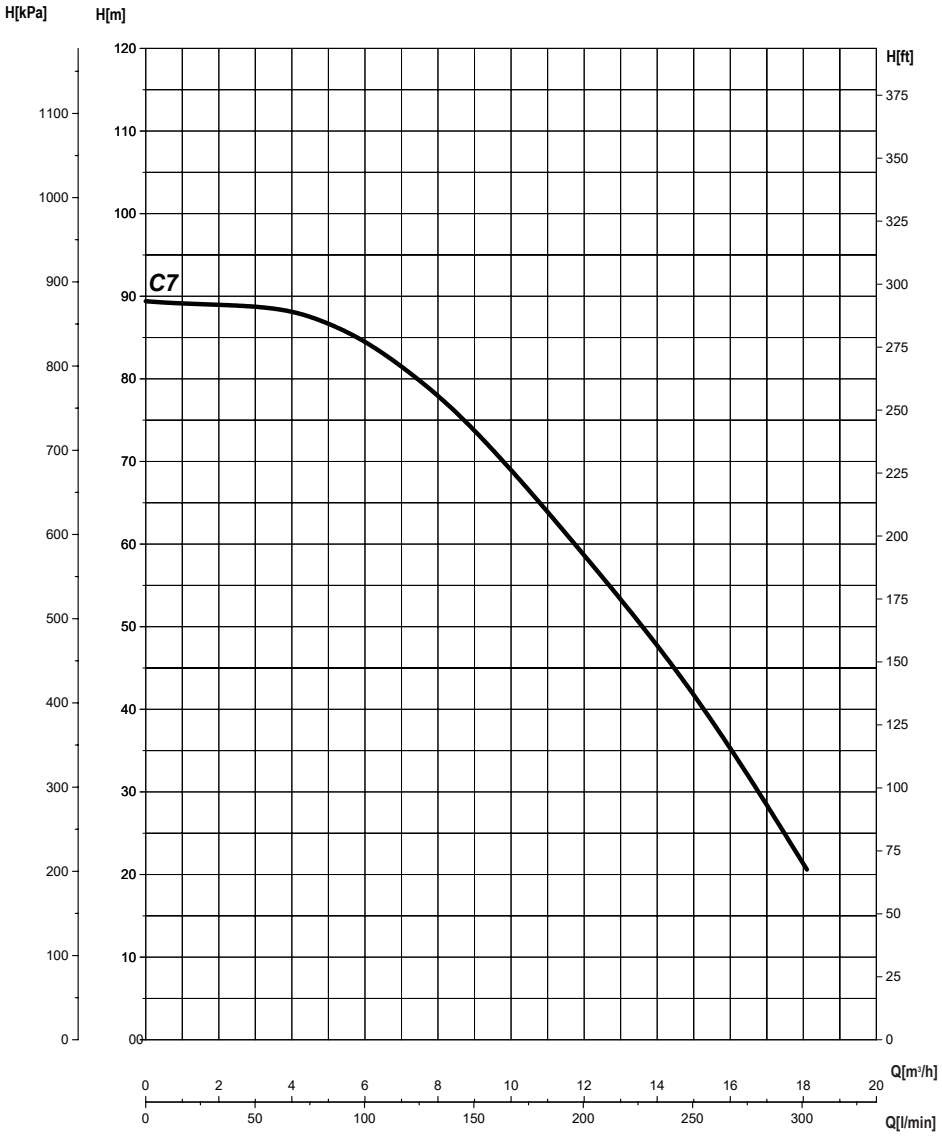


kW	HP	A @ 415V	DIMENSIONS			KG
			D	d	L	
3.3	4.5	7.2	143	1 1/4”	757	31.3

Features

The three phase C series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

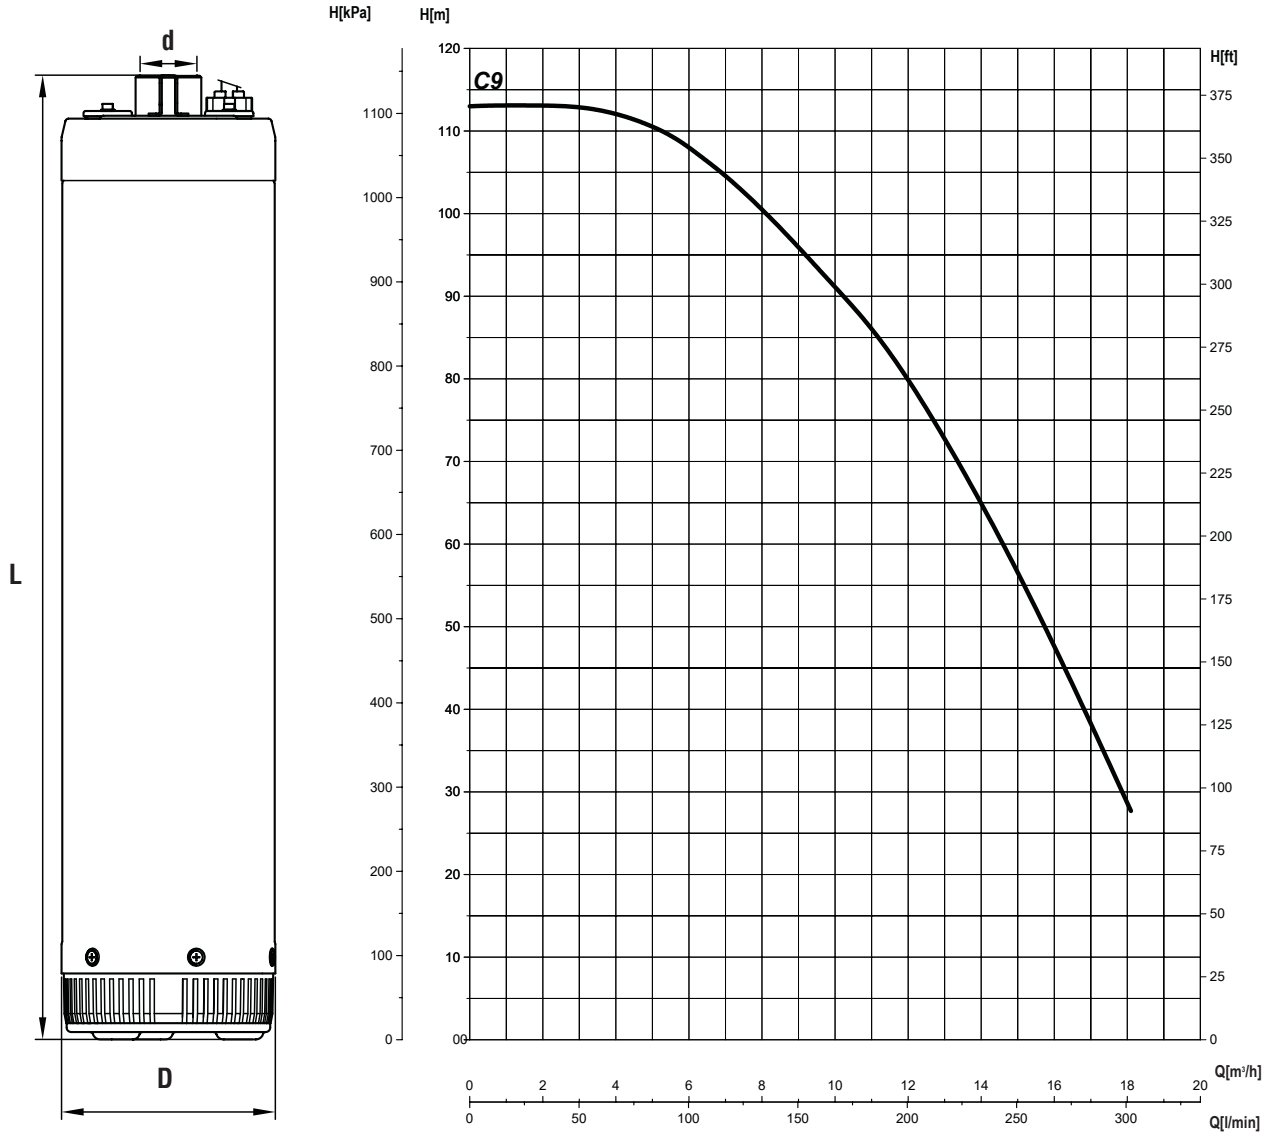


kW	HP	A @ 400V	DIMENSIONS			KG
			D	d	L	
4.0	5.5	9.1	143	1 1/4”	853	34.8

TORPEDO SUBMERSIBLE PRESSURE PUMPS

Features

The three phase B series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

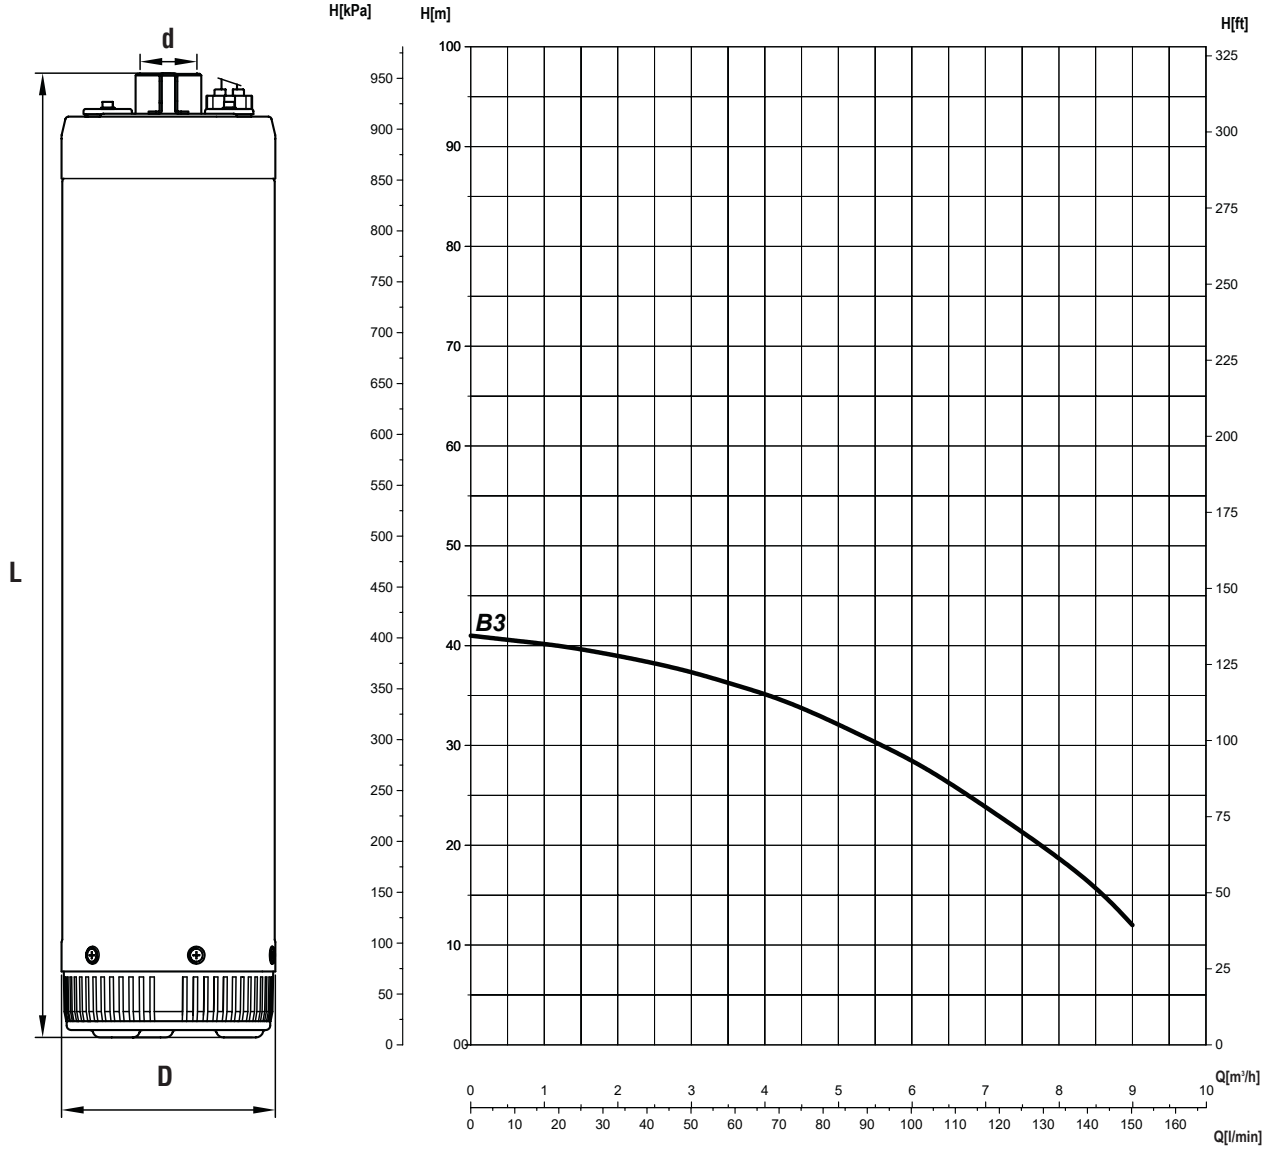


kW	HP	A @ 415V	DIMENSIONS			KG
			D	d	L	
1.0	1.36	2.4	143	1 1/4”	521	22.7

Features

The three phase B series of pumps can be installed in 6” deep wells as submersed motor-driven pumps or as submersible pumps in open wells, basins, tubs or tanks. The series is suitable for use with variable frequency drives. Designed for fresh water only.

- Outer Jacket: AISI304 Stainless Steel
- Impellers: Thermoplastic Resin
- Protection Class: IP68
- Temperature of pumped liquid: min 0ºC - max 40ºC
- Maximum depth: up to 70m below water level

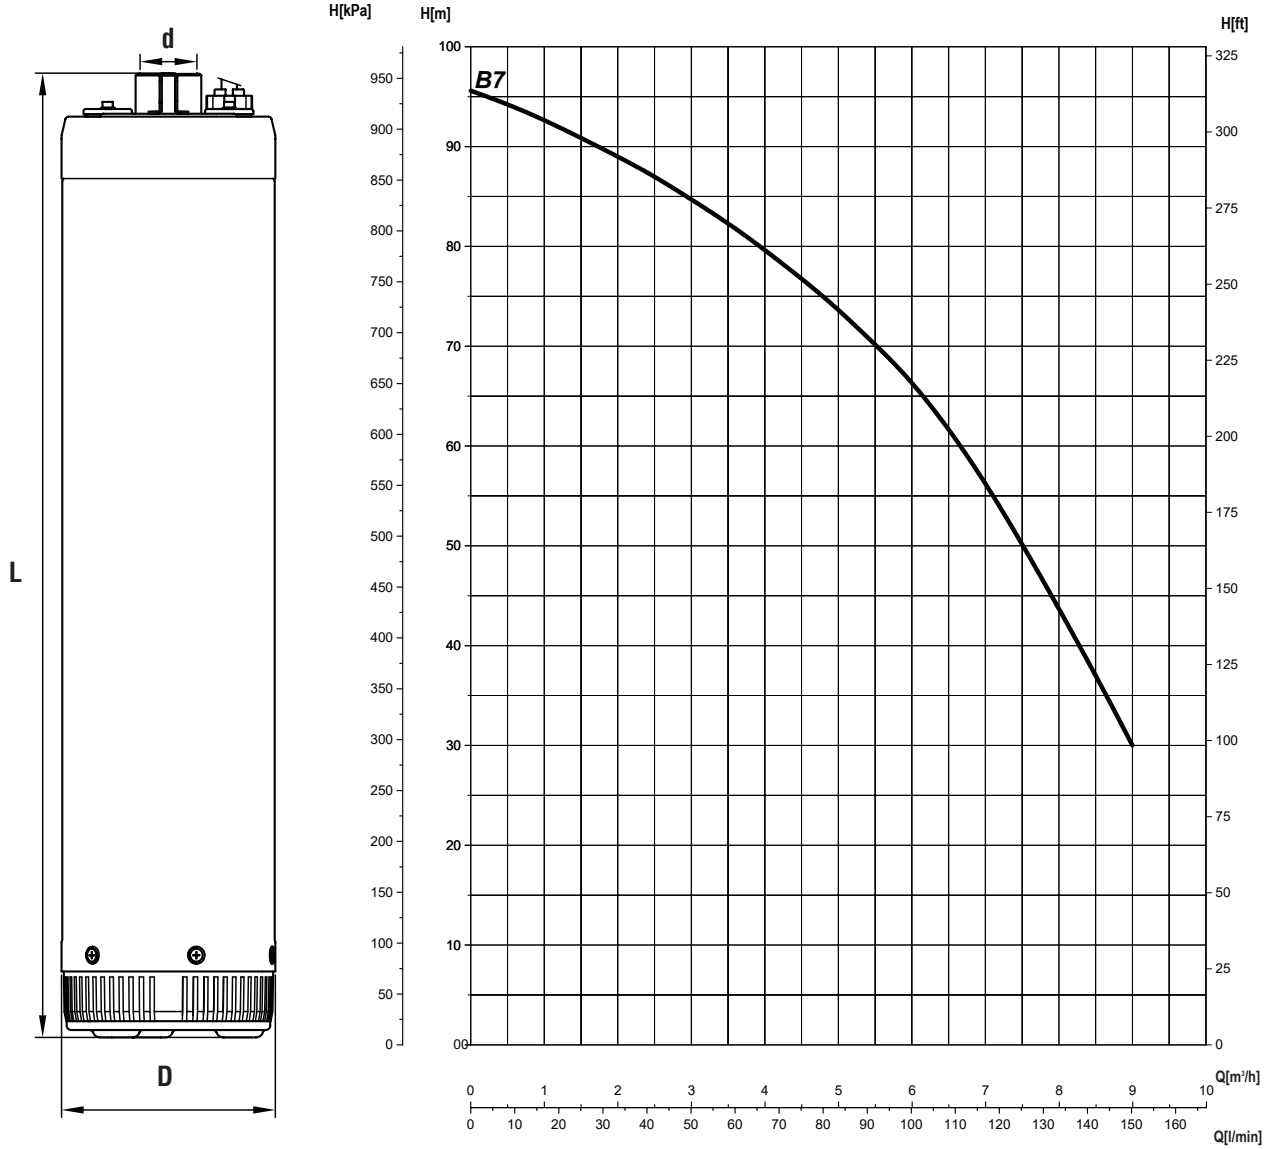

kW	HP	A @ 415V	DIMENSIONS			KG
			D	d	L	
2.2	3.0	5.0	143	1 1/4”	673	28.3