Pressure Systems

Pressure systems are essential in today's domestic water supply applications to ensure adequate pressure and flow requirements are provided in a range of applications including:

- Residential domestic boosting
- Home high-rise development
- Commercial applications in hospitals, universities
- Agricultural and horticultural applications
- Rainwater harvesting and Stormwater reuse
- Infrastructure projects
- Irrigation systems
- Warehouse and processing plants

Single, Dual or Triplex

In any domestic supply application, it is always recommended to provide a dual pressure boosting system as a minimal requirement. However, based on the overall design parameters of the application, Aline has built systems with up to six pump sets, to ensure not only a guaranteed flow rate, but a system that provides optimum efficiency, constant pressure, and reliability.





Reduction in Mains Pressure

In main municipal areas, water authorities are reducing the system pressure to typically 275Kpa. This does vary from region to region, and on this account the requirement for pressure boosting systems in an ever-increasing need. At Aline, you can be assured of the best solution, with our range of innovative designs, specifically for your needs.





Features & Benefits

- Stainless Steel vertical multistage pump
- Galvanised heavy duty base
- System pressure tested
- Variable or Fixed speed
- Threaded or flanged outlet/inlet
- Stainless Steel manifolds
- Available in a wide range of kW sizes
- Control panel mounted on stand with base



Features & Benefits

- Stainless Steel vertical multistage pump
- Galvanised heavy duty base
- System pressure tested
- Variable or Fixed speed
- Threaded or flanged outlet/inlet
- Stainless Steel manifolds
- Available in a wide range of kW sizes
- Control panel mounted on stand with base




Features & Benefits

- Stainless Steel vertical multistage pump
- Galvanised heavy duty base
- System pressure tested
- Variable or Fixed speed
- Threaded or flanged outlet/inlet
- Stainless Steel manifolds
- Available in a wide range of kW sizes
- Control panel mounted on stand with base




Features & Benefits

- Stainless Steel vertical multistage pump
- Galvanised extra-heavy duty base
- System pressure tested
- Variable or Fixed speed
- Threaded or flanged outlet/inlet
- Stainless Steel manifolds
- Available in a wide range of kW sizes
- Control panel mounted on stand with base

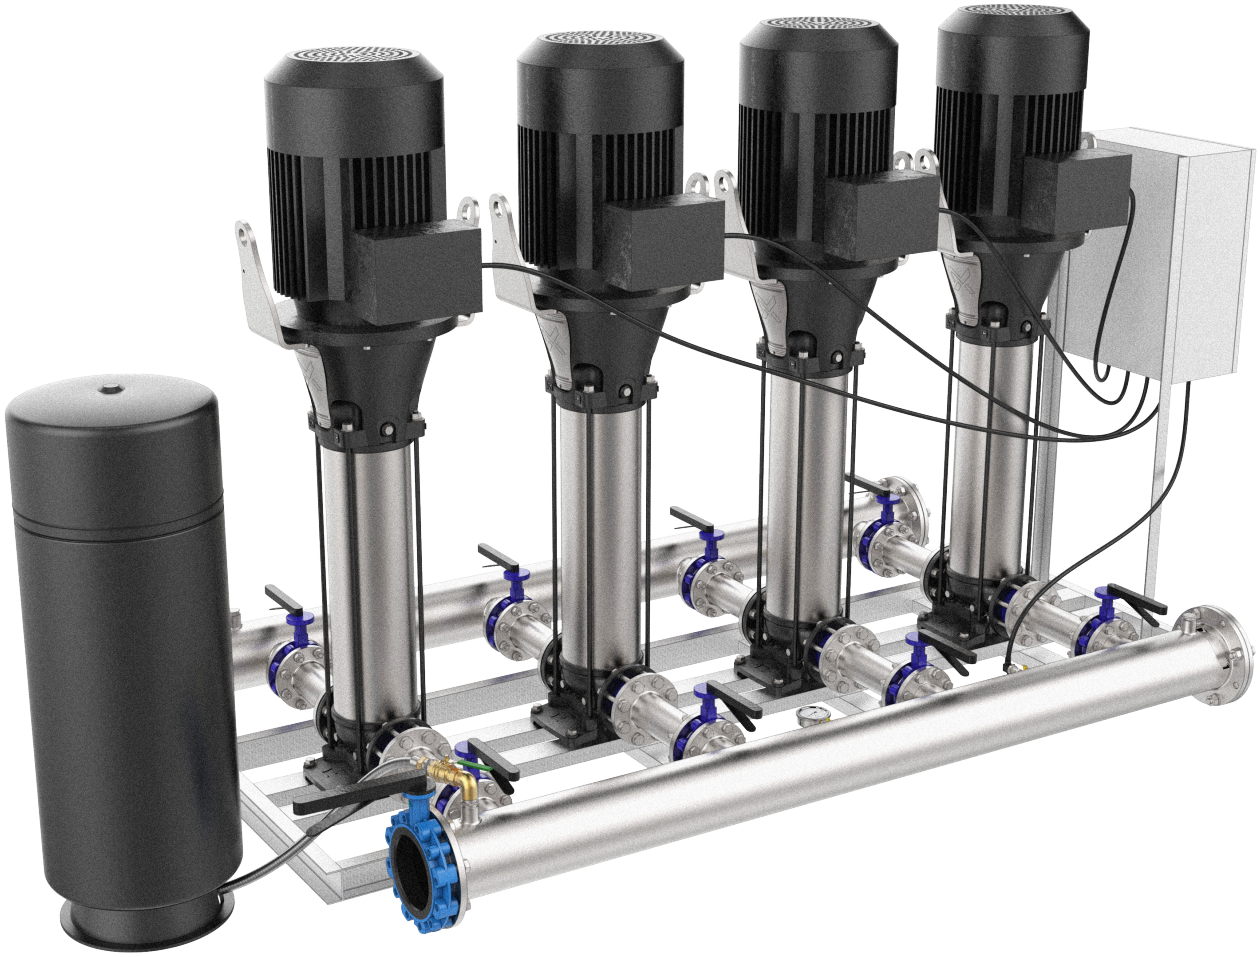

Performance Scope

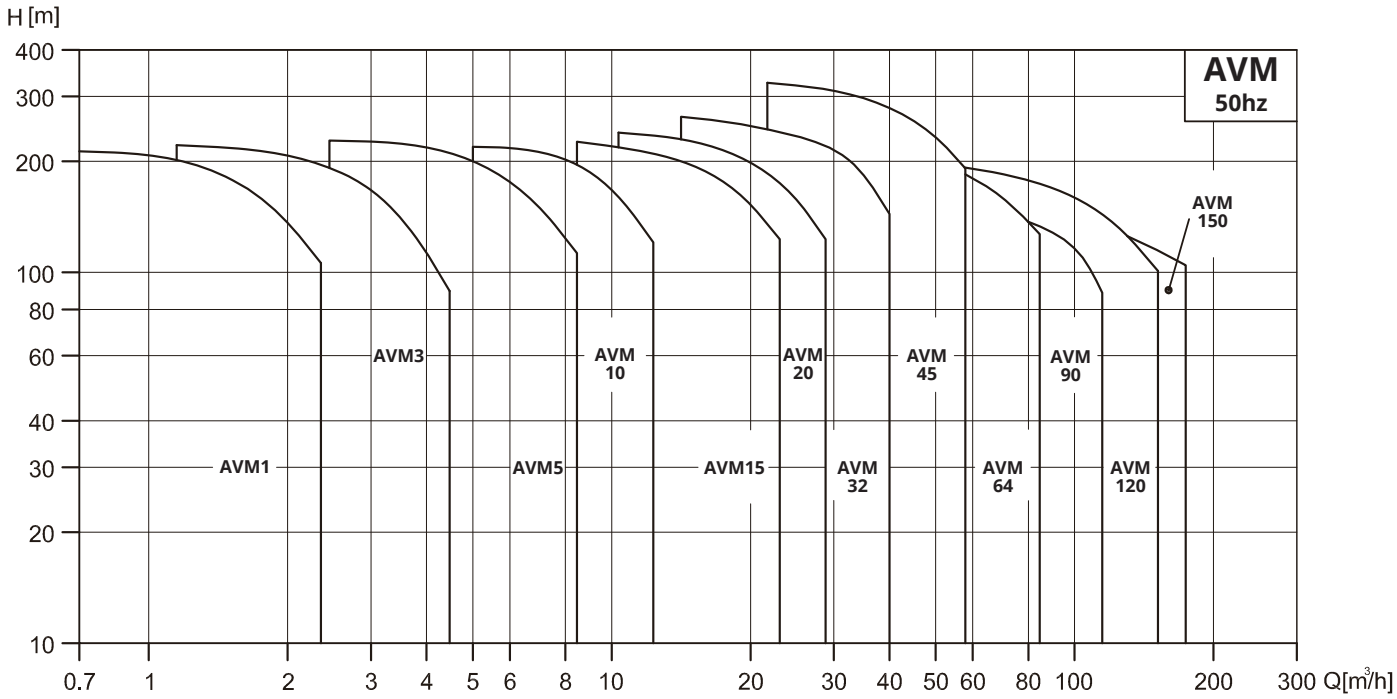


Motor


MOTOR TYPE					NOMINAL CURRENT IN [A]			
HP	kW	POLE	FLANGE	FRAME	3~220V	3 ~240 V	3~380V	3~415V
0.5	0.37			71	1.8	1.9	1.0	1.1
0.75	0.55			71	2.6	2.7	1.5	1.6
1.0	0.75			80	3.4	3.6	2.0	2.1
1.5	1.1			90S	5.1	5.2	2.9	3.0
2.0	1.5		B14	90S	6.0	6.2	3.5	3.6
3.0	2.2			90L	9.5	10.0	5.5	5.8
4.0	3.0			100L	12.1	12.5	7.0	7.2
5.5	4.0			112M	14.9	15.0	8.6	8.7
					3~380V	3~415V	3~660V	3~690V
7.5	5.5			132S	12.1	12.0	7.0	6.9
10.0	7.5	2		132M	16.0	15.3	9.2	8.8
							3~380V	3~415V
15	11			160M			21.0	19.2
20.0	15.0			160M			28.4	26.0
25	18.5		B5	160L			34.7	31.8
30	22			180M			41.1	37.7
40	30			200L			55.7	51.0
50	37			200L			68.3	62.5
60	45			225m			87.2	78.6
75	55			250M			101.0	92.5
100	75			280S			134.0	123.0

Product Data


RANGE	AVM											
	1	3	5	10	15	20	32	45	64	90	120	150
50Hz												
Nominal Flow (m^3/h)	1	3	5	10	15	20	32	45	64	90	120	150
Flow Range (m^3/h)	0.7-2.4	1.2-4.5	2.5-8.5	5-13	8.5-23.5	10.5-29	15-40	22-58	30-85	45-120	60-160	75.180
Max. pressure (bar)	21.5	23	24	21.5	23	24.3	27.5	33	21.8	20	20.4	18.7
Fluid Temperature (°C)	-15 to +120											
Motor Power (kW)	0.37-2.2	0.37-3	0.37-5.5	0.37-7.5	1.1-15	1.1-18.5	1.5-30	3-45	4-45	5.5-45	11-75	11-75
MOTOR												
Main Connection 1 ~ (V/Hz) (Permissible voltage tolerance ±10%)	220-240 V 50 Hz											
Main Connection 3 (V/Hz) (Permissible Voltage tolerance ±10%)	0.37-3.0kW 220-240/380-415 V 50 Hz From 4.0 kW 380-415 V 50 Hz											
Insulation Class	F											
Protection Class	IP 55											
Ambient Temperature	40°C											
AVM PIPE CONNECTION												
Flange	DN 25 / DN 32	DN 25 / DN 32	DN 25 / DN 32	DN 40	DN 50	DN 50	DN 65	DN 80	DN 100	DN 100	DIN 125	DIN 125
MECHANICAL SEALS												
SiC/SiC	Standard											
SEALS												
EPDM	Standard										0.37kW-45kW	
Viton											55kW-75kW	

Approved for Drinking Water
AS/NZS 4020

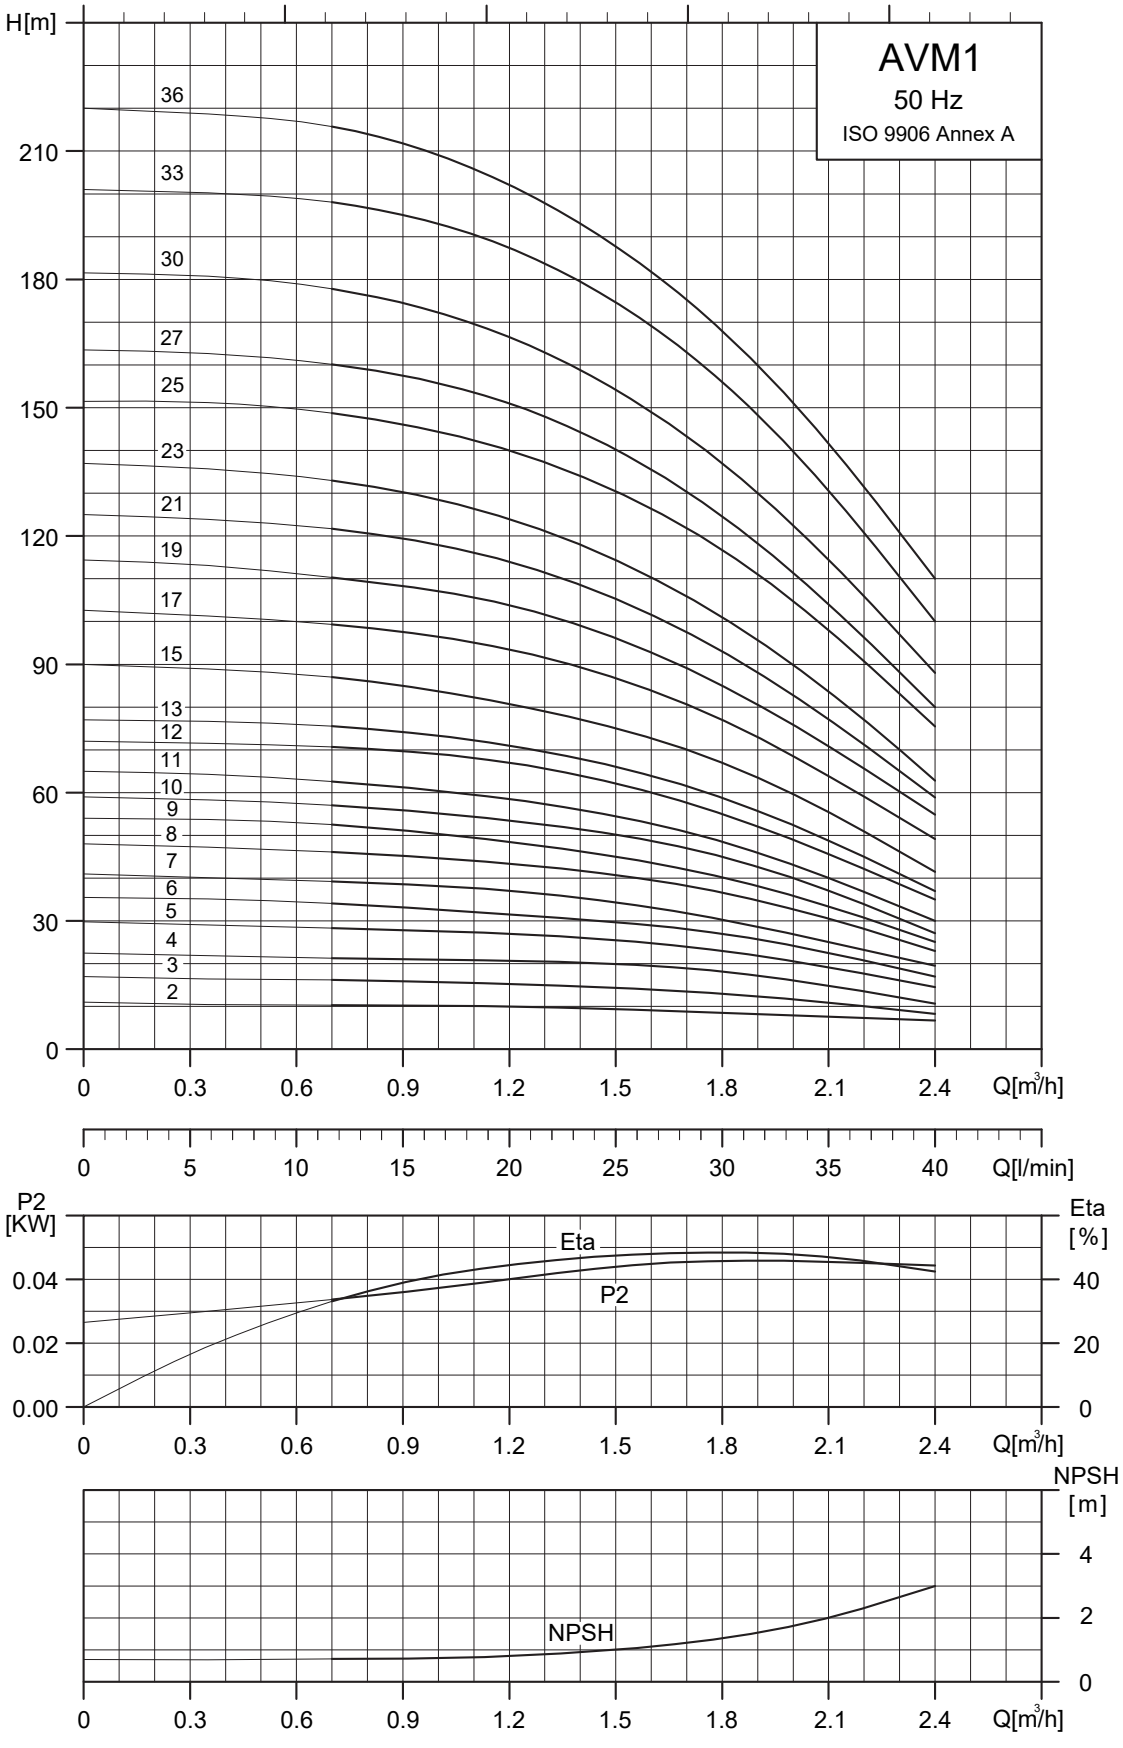
AVM1
50 Hz
ISO 9906 Annex A
H[m]
36
33
30
27
25
23
21
19
17
15
13
12
11
10
9
8
7
6
5
4
3
2
0
30
60
90
120
150
180
210
0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 Q[m³/h]
0 5 10 15 20 25 30 35 40 Q[l/min]
P2 [KW]
0.00
0.02
0.04
Eta
P2
Eta [%]
0
20
40
0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 Q[m³/h]
NPSH [m]
NPSH
0
2
4
0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 Q[m³/h]

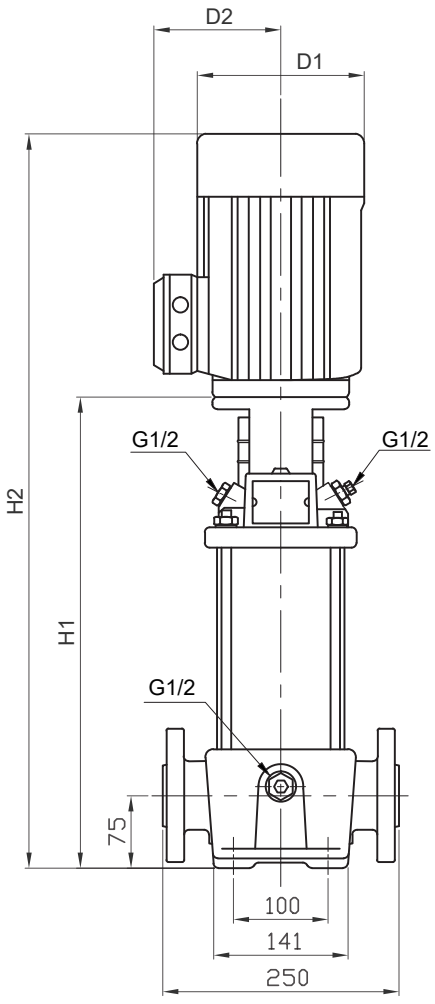


Flange(DIN-ANSI-JIS)
PN 25 / DN25/32

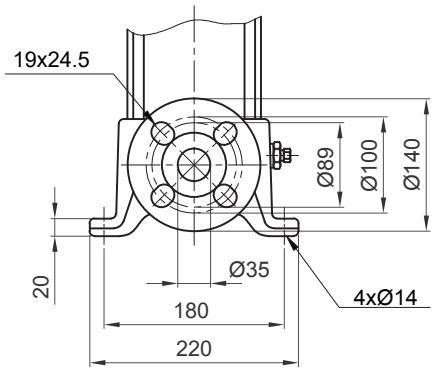


MODEL	MOTOR	AVM				
		DIMENSIONS [MM]				NET WEIGHT [KG]
	P2	DIN FLANGE		D1	D2	DIN FLANGE
	kW	H1	H2			
AVM1-2	0.37	279	470	141	109	23.0
AVM1-3	0.37	279	479	141	109	23.0
AVM1-4	0.37	297	488	141	109	23.0
AVM1-5	0.37	315	506	141	109	24.0
AVM1-6	0.37	333	524	141	109	24.0
AVM1-7	0.37	351	542	141	109	25.0
AVM1-8	0.55	369	560	141	109	26.0
AVM1-9	0.55	387	578	141	109	26.0
AVM1-10	0.55	405	596	141	109	26.0
AVM1-11	0.55	423	614	141	109	27.0
AVM1-12	0.75	447	678	141	109	29.0
AVM1-13	0.75	465	696	141	109	29.0
AVM1-15	0.75	501	732	141	109	30.0
AVM1-17	1.1	537	768	141	109	33.0
AVM1-19	1.1	573	804	141	109	34.0
AVM1-21	1.1	609	840	141	109	35.0
AVM1-23	1.1	645	876	141	109	36.0
AVM1-25	1.5	697	972	175	109	42.9
AVM1-27	1.5	733	1008	175	140	43.7
AVM1-30	1.5	787	1062	175	140	44.8
AVM1-33	2.2	841	1116	175	140	47.9
AVM1-36	2.2	895	1170	175	140	49.1


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

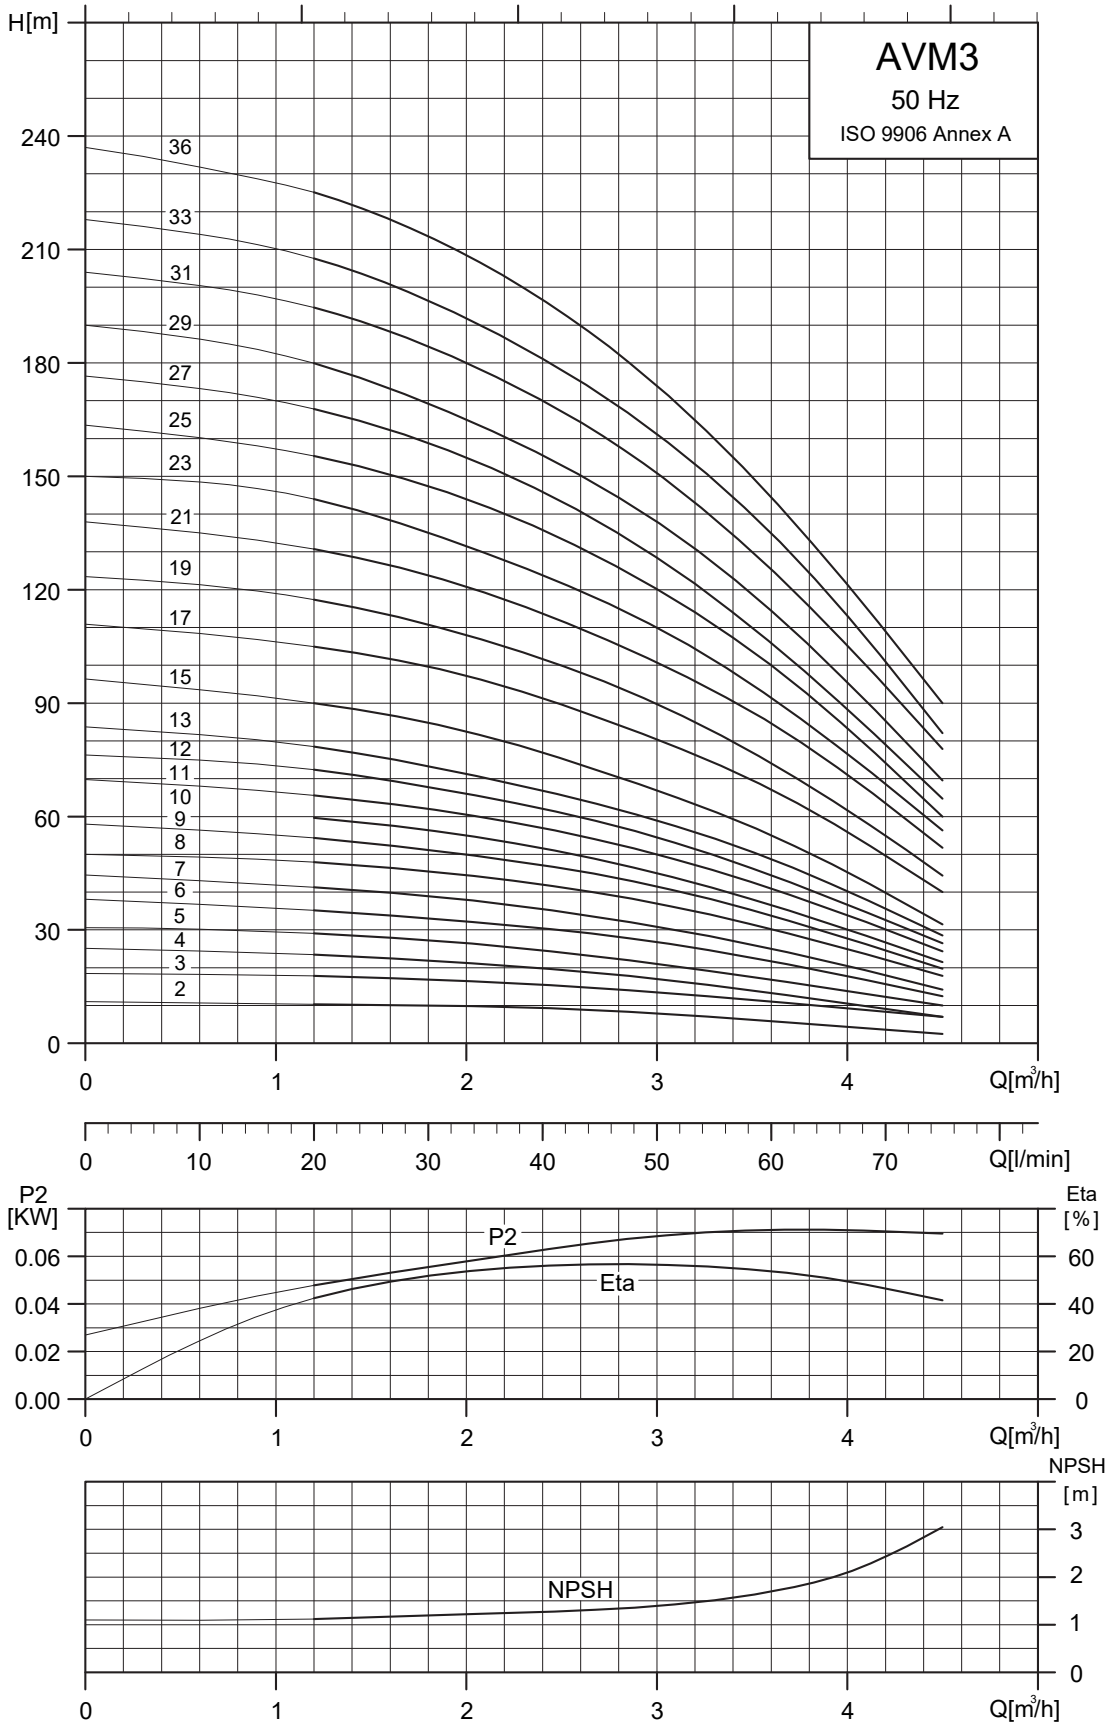
AVM3
50 Hz
ISO 9906 Annex A
H[m]
240
210
180
150
120
90
60
30
0
36
33
31
29
27
25
23
21
19
17
15
13
12
11
10
9
8
7
6
5
4
3
2
0
1
2
3
4
Q[m³/h]
0
10
20
30
40
50
60
70
Q[l/min]
P2
[KW]
0.06
0.04
0.02
0.00
P2
Eta
Eta
[%]
60
40
20
0
NPSH
[m]
3
2
1
0
NPSH

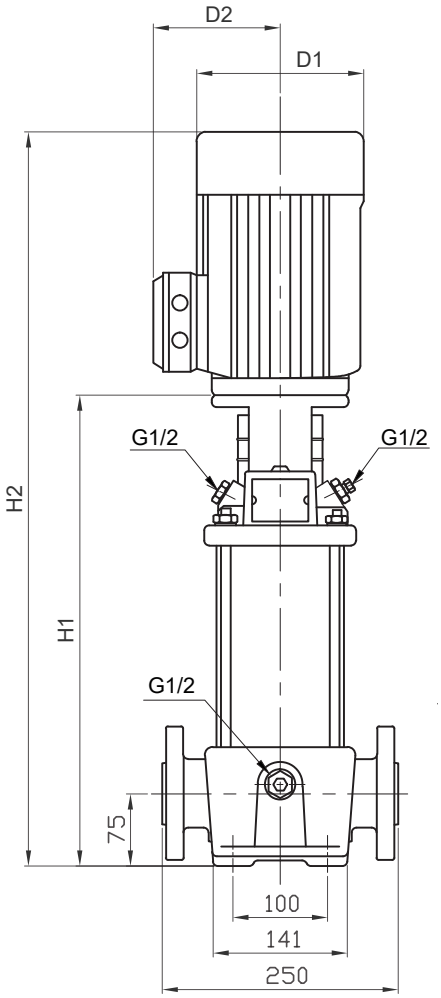


Flange(DIN-ANSI-JIS)
PN 25 / DN25/32

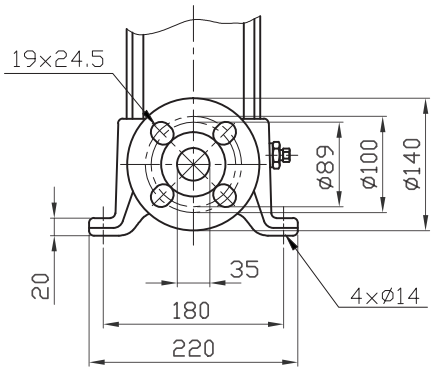


MODEL	MOTOR	AVM				
		DIMENSIONS [MM]				
	P²	DIN FLANGE		D1	D2	NET WEIGHT (KG)
	kW	H1	H2			
AVM3-2	0.37	279	470	141	109	23
AVM3-3	0.37	279	470	141	109	23
AVM3-4	0.37	279	488	141	109	23
AVM3-5	0.37	315	506	141	109	24
AVM3-6	0.55	333	524	141	109	25
AVM3-7	0.55	351	542	141	109	25
AVM3-8	0.75	375	606	141	109	27
AVM3-9	0.75	393	624	141	109	28
AVM3-10	0.75	411	642	141	109	28
AVM3-11	1.1	429	660	141	109	31
AVM3-12	1.1	447	678	141	109	31
AVM3-13	1.1	465	696	141	109	31
AVM3-15	1.1	501	732	141	109	32
AVM3-17	1.5	533	828	175	140	29.9
AVM3-19	1.5	589	864	175	140	40.7
AVM3-21	2.2	625	900	175	140	43.4
AVM3-23	2.2	661	936	175	140	44.2
AVM3-25	2.2	697	972	175	140	44.9
AVM3-27	2.2	733	1008	175	140	45.7
AVM3-29	2.2	769	1044	175	140	46.4
AVM3-30	3	809	1129	196	148	53.9
AVM3-33	3	845	1165	196	148	54.7
AVM3-36	3	899	1219	196	148	55.8


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

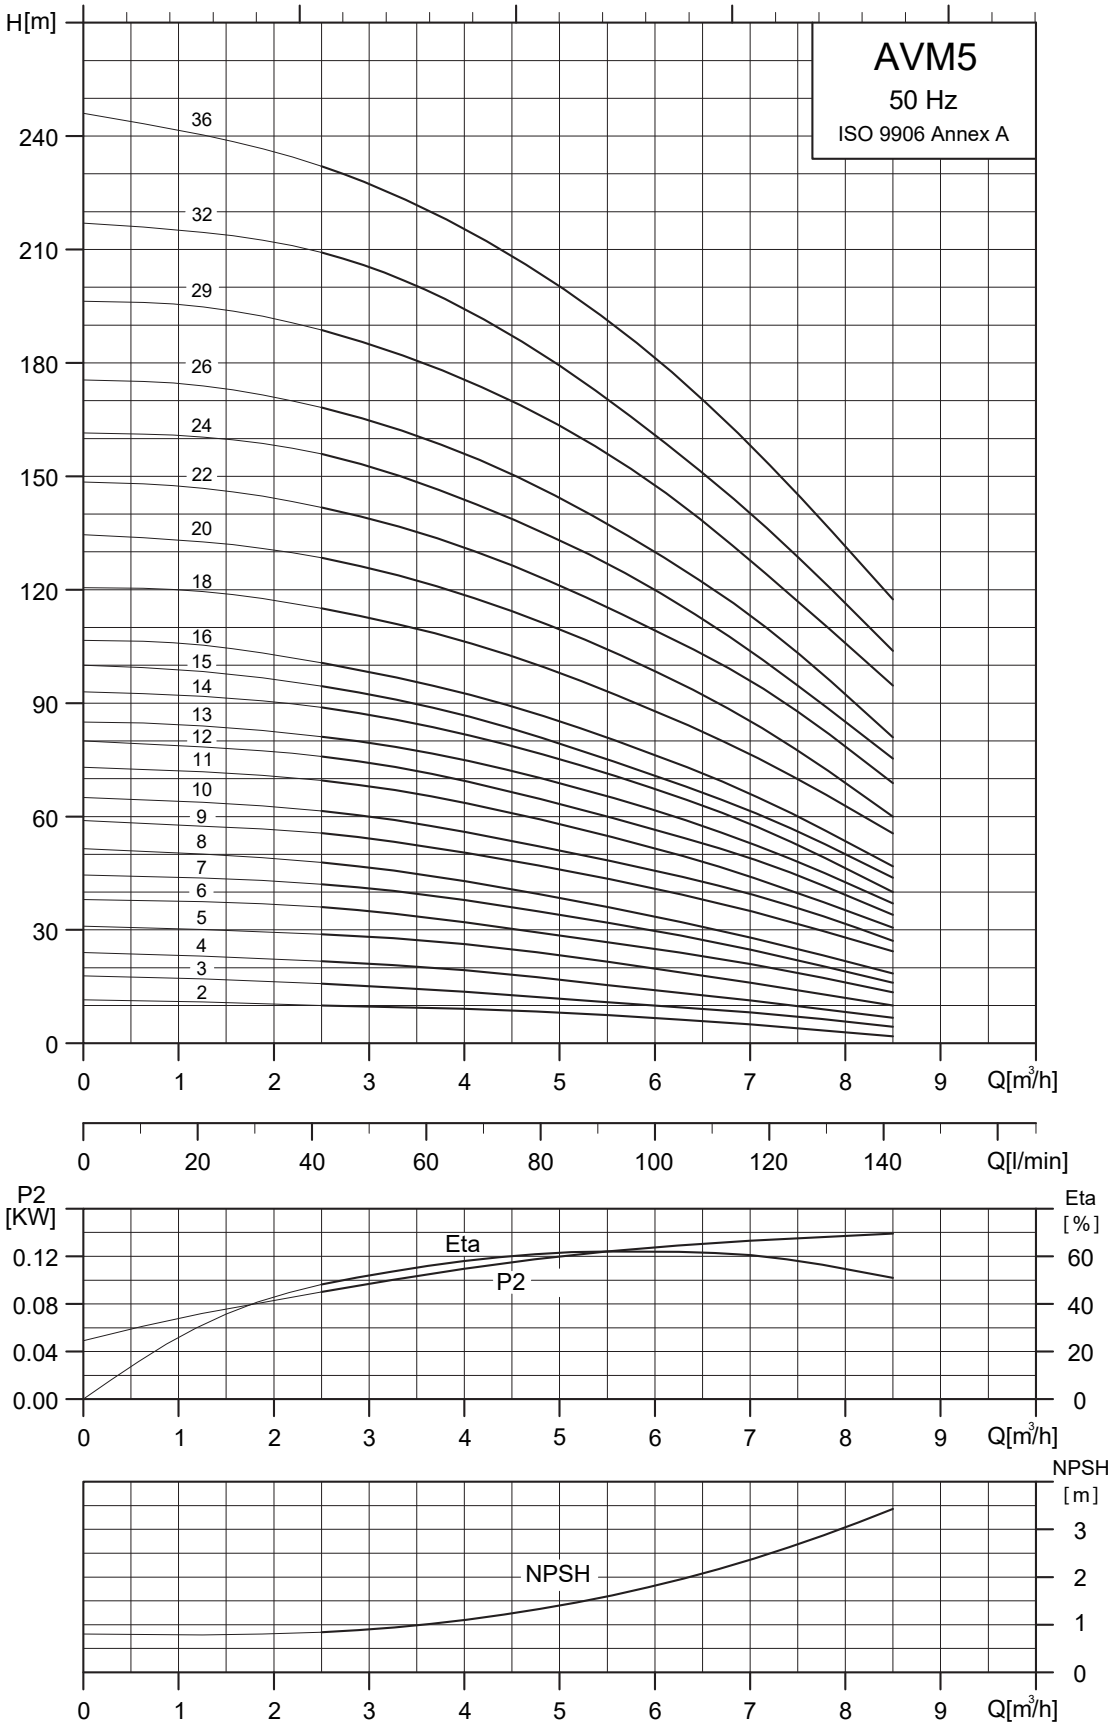
AVM5
50 Hz
ISO 9906 Annex A
H[m]
240
210
180
150
120
90
60
30
0
36
32
29
26
24
22
20
18
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
0 1 2 3 4 5 6 7 8 9 Q[m³/h]
0 20 40 60 80 100 120 140 Q[l/min]
P2 [KW]
0.12
0.08
0.04
0.00
Eta
P2
Eta [%]
60
40
20
0
0 1 2 3 4 5 6 7 8 9 Q[m³/h]
NPSH
NPSH [m]
3
2
1
0
0 1 2 3 4 5 6 7 8 9 Q[m³/h]

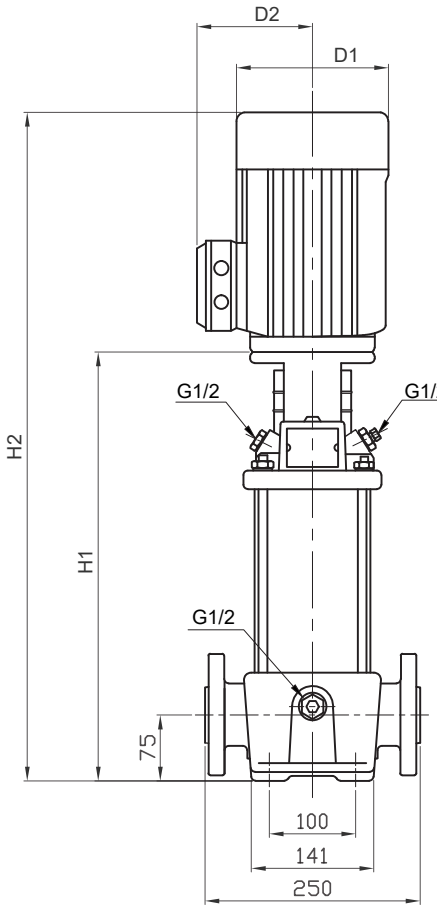


Flange(DIN-ANSI-JIS)
PN 25 / DN25/32

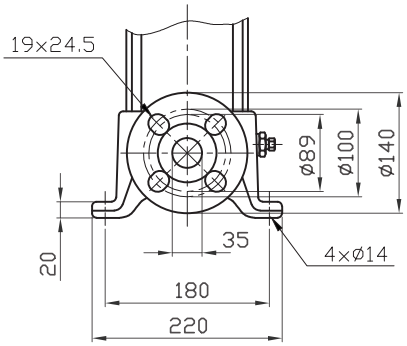


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM5-2	0.37	279	470	141	109	-	23
AVM5-3	0.55	3.6	497	141	109	-	24
AVM5-4	0.55	333	524	141	109	-	25
AVM5-5	0.75	366	597	141	109	-	27
AVM5-6	1.1	393	624	141	109	-	30
AVM5-7	1.1	420	651	141	109	-	30
AVM5-8	1.1	447	678	141	109	-	31
AVM5-9	1.5	490	765	175	140	-	38.3
AVM5-10	1.5	517	792	175	140	-	38.9
AVM5-11	2.2	544	819	175	140	-	41.5
AVM5-12	2.2	571	846	175	140	-	42.0
AVM5-13	2.2	598	873	175	140	-	42.6
AVM5-14	2.2	625	900	175	140	-	43.2
AVM5-15	2.2	652	927	175	140	-	43.8
AVM5-16	3	679	954	175	148	-	44.3
AVM5-18	3	737	1057	196	148	-	52.2
AVM5-20	4	791	1111	196	162	-	53.4
AVM5-22	4	845	1180	219	162	-	61.5
AVM5-24	4	899	1234	219	162	-	62.6
AVM5-26	4	953	1288	219	162	-	63.8
AVM5-29	4	1034	1369	219	162	-	65.5
AVM5-32	5.5	1145	1505	234	199	300	85.9
AVM5-36	5.5	1253	1613	234	199	300	88.2

* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

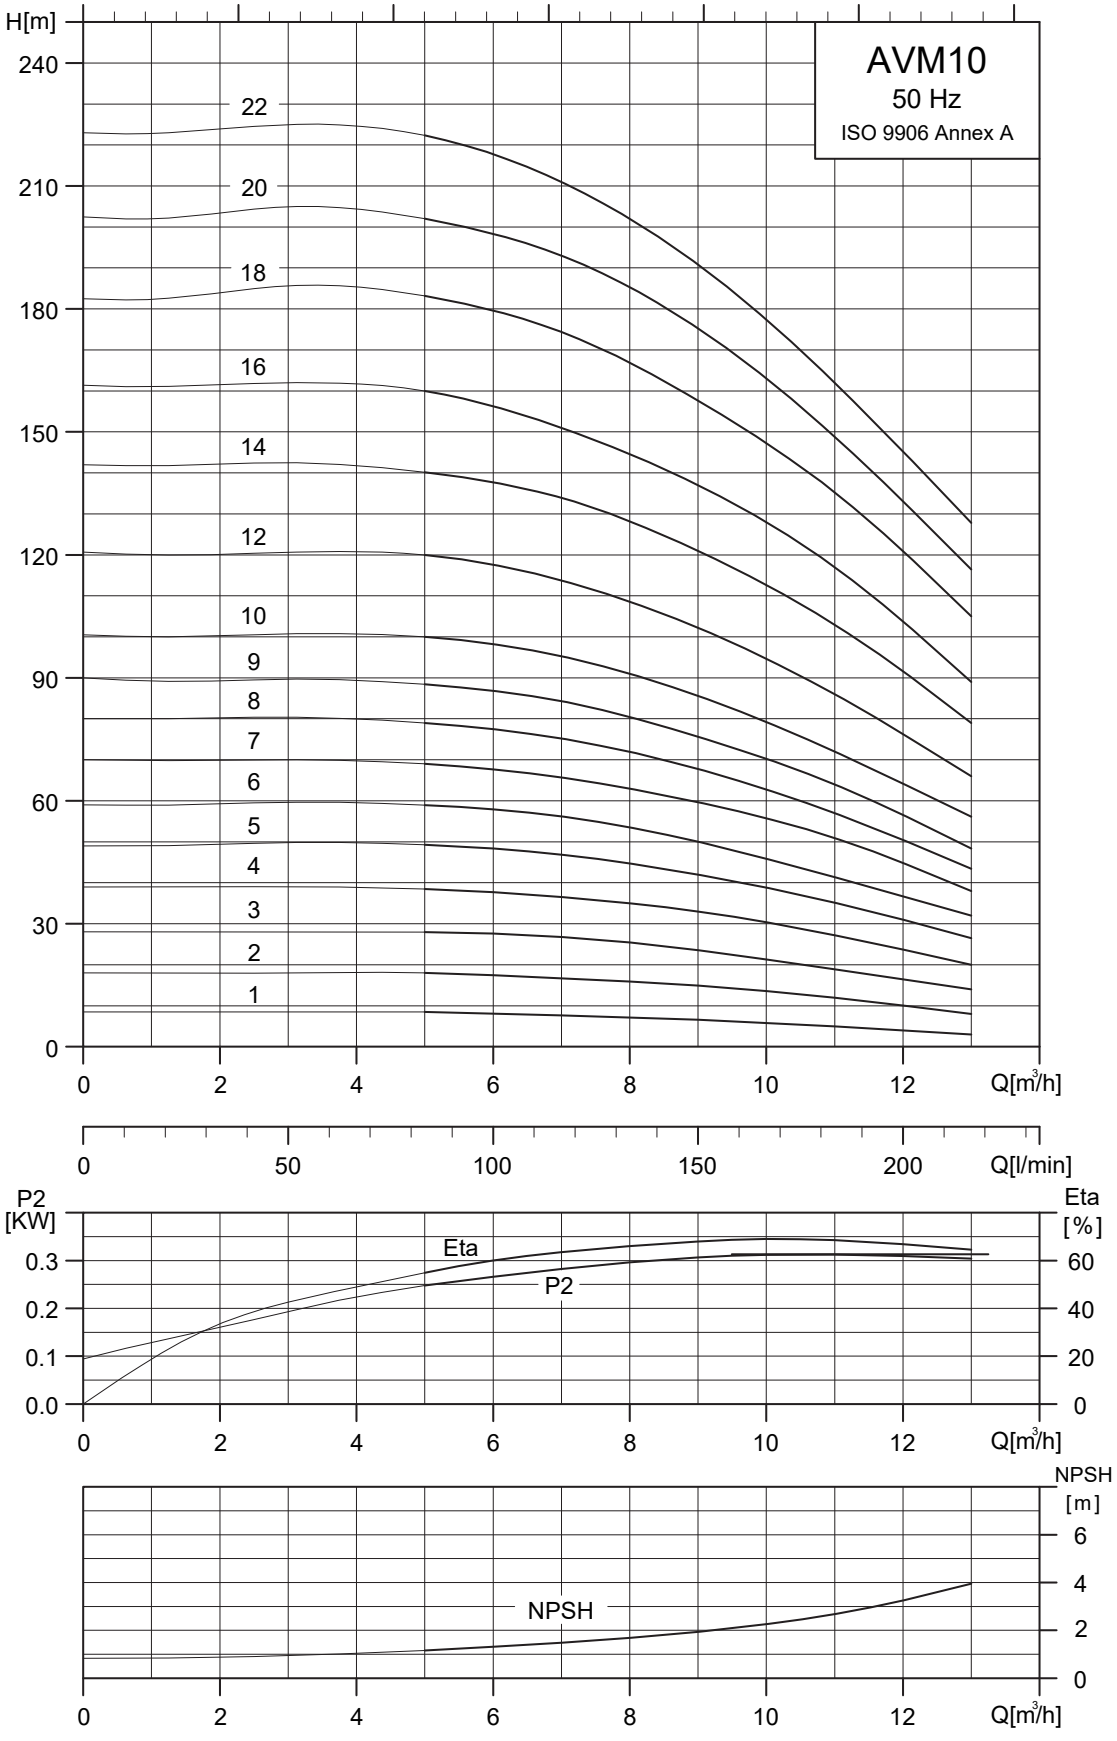

AVM10
50 Hz
ISO 9906 Annex A
H[m]
240
210
180
150
120
90
60
30
0
22
20
18
16
14
12
10
9
8
7
6
5
4
3
2
1
0
2
4
6
8
10
12
Q[m³/h]
0
50
100
150
200
Q[l/min]
P2
[KW]
0.3
0.2
0.1
0.0
Eta
P2
Eta
[%]
60
40
20
0
Q[m³/h]
NPSH
[m]
6
4
2
0
NPSH
Q[m³/h]

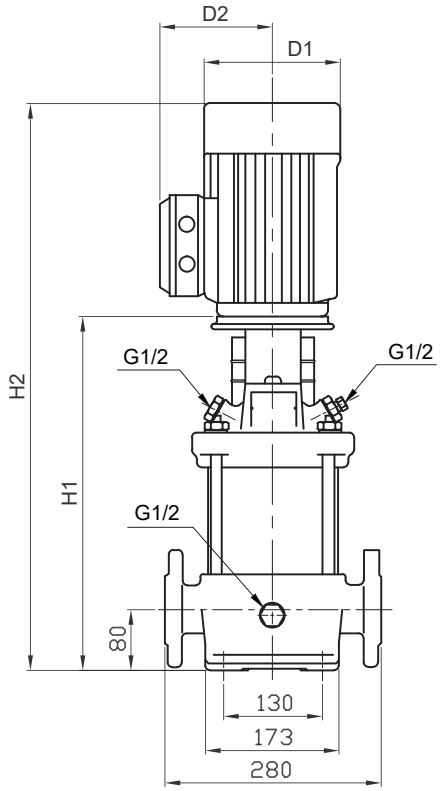


MODEL	MOTOR	AVM					
		DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM10-1	0.37	343	534	141	109	-	34
AVM10-2	0.75	347	578	141	109	-	36
AVM10-3	1.1	377	608	141	109	-	39
AVM10-4	1.5	423	698	175	140	-	48.2
AVM10-5	2.2	453	728	175	140	-	51.2
AVM10-6	2.2	483	758	175	140	-	52.2
AVM10-7	3	518	838	196	148	-	60.5
AVM10-8	3	548	868	196	148	-	61.5
AVM10-9	3	578	898	196	148	-	62.5
AVM10-10	4	608	943	219	162	-	70.5
AVM10-12	4	668	1003	219	162	-	72.6
AVM10-14	5.5	760	1120	234	199	300	98.5
AVM10-16	5.5	820	1180	234	199	300	100.5
AVM10-18	7.5	880	1280	234	199	300	111.6
AVM10-20	7.5	940	1340	234	199	300	113.6
AVM10-22	7.5	1000	1400	234	199	300	115.7


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type


Flange(DIN-JIS)
PN 16-25 / DN 40

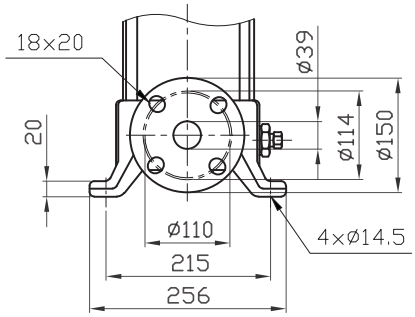

Approved for Drinking Water
AS/NZS 4020

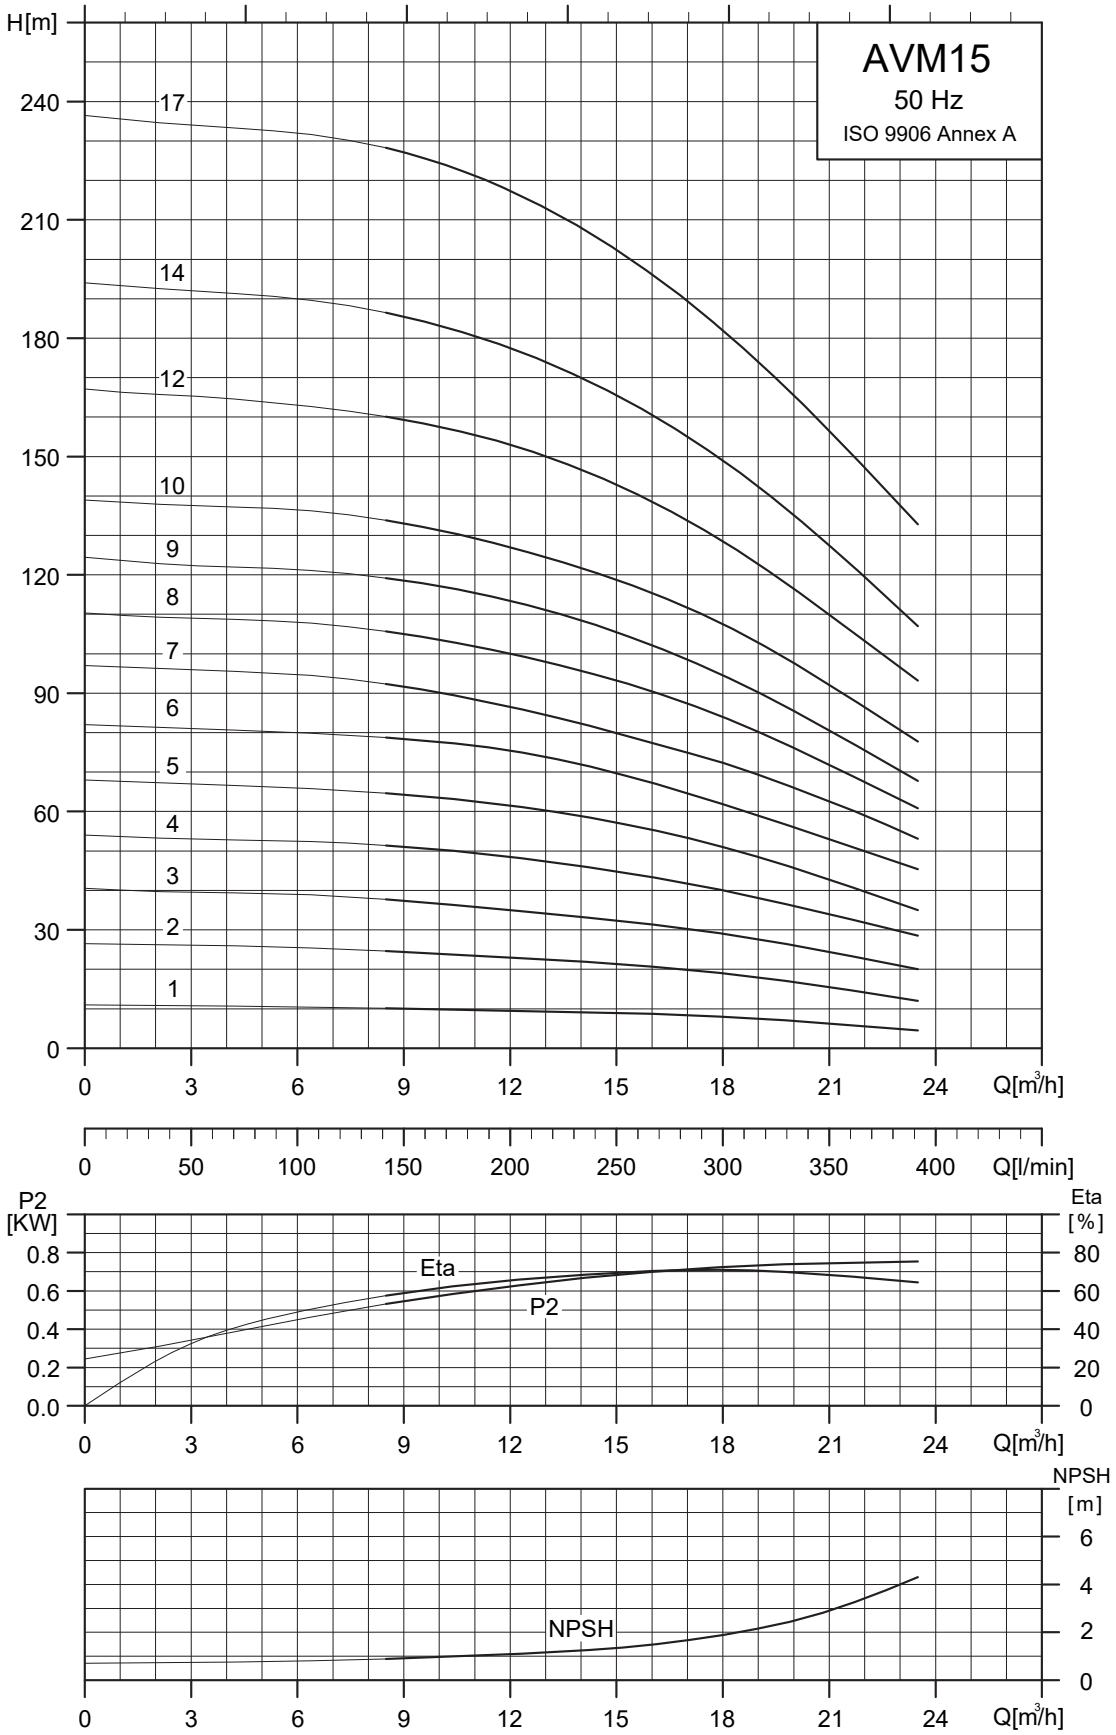
AVM15
50 Hz
ISO 9906 Annex A
H[m]
240
210
180
150
120
90
60
30
0
17
14
12
10
9
8
7
6
5
4
3
2
1
0 3 6 9 12 15 18 21 24 Q[m³/h]
0 50 100 150 200 250 300 350 400 Q[l/min]
P2 [KW]
0.8
0.6
0.4
0.2
0.0
Eta
P2
Eta [%]
80
60
40
20
0
0 3 6 9 12 15 18 21 24 Q[m³/h]
NPSH [m]
6
4
2
0
NPSH
0 3 6 9 12 15 18 21 24 Q[m³/h]

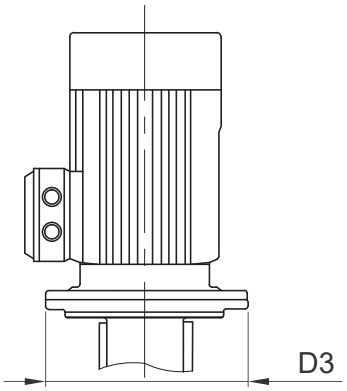


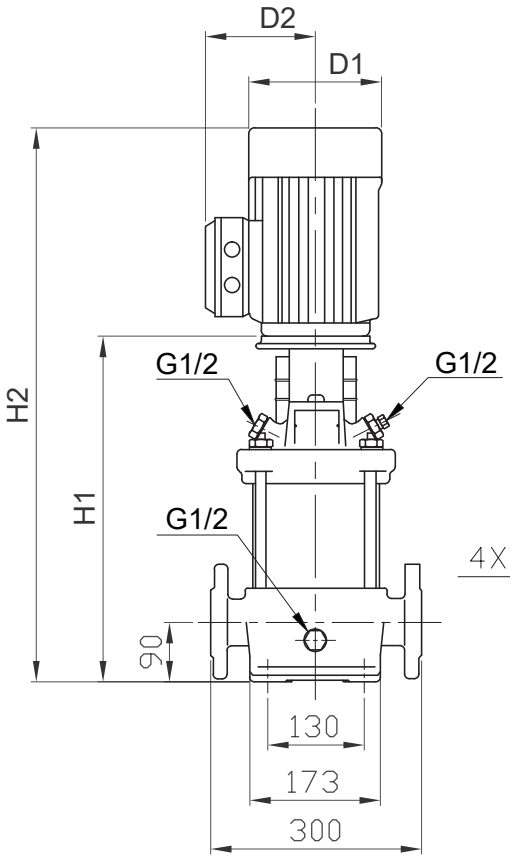


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM15-1	1.1	400	631	141	109	-	42
AVM15-2	2.2	415	690	175	140	-	52.6
AVM15-3	3	465	785	196	148	-	61.3
AVM15-4	4	510	845	219	162	-	69.7
AVM15-5	4	555	890	219	162	-	71.7
AVM15-6	5.5	632	992	234	199	300	96.3
AVM15-7	5.5	677	1037	234	199	300	97.7
AVM15-8	7.5	722	1122	234	199	300	108.1
AVM15-9	7.5	767	1167	234	199	300	109.5
AVM15-10	11	889	1334	268	215	350	140.6
AVM15-12	11	979	1424	268	215	350	143.4
AVM15-14	11	1069	1514	268	215	350	146.2
AVM15-17	15	1204	1693	268	215	350	141.2


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type


Flange(DIN)
PN 16-25 / DN 50

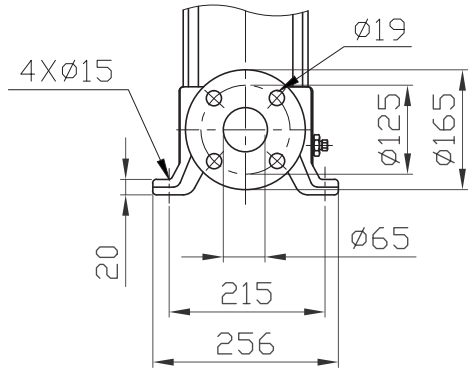

Approved for Drinking Water
AS/NZS 4020

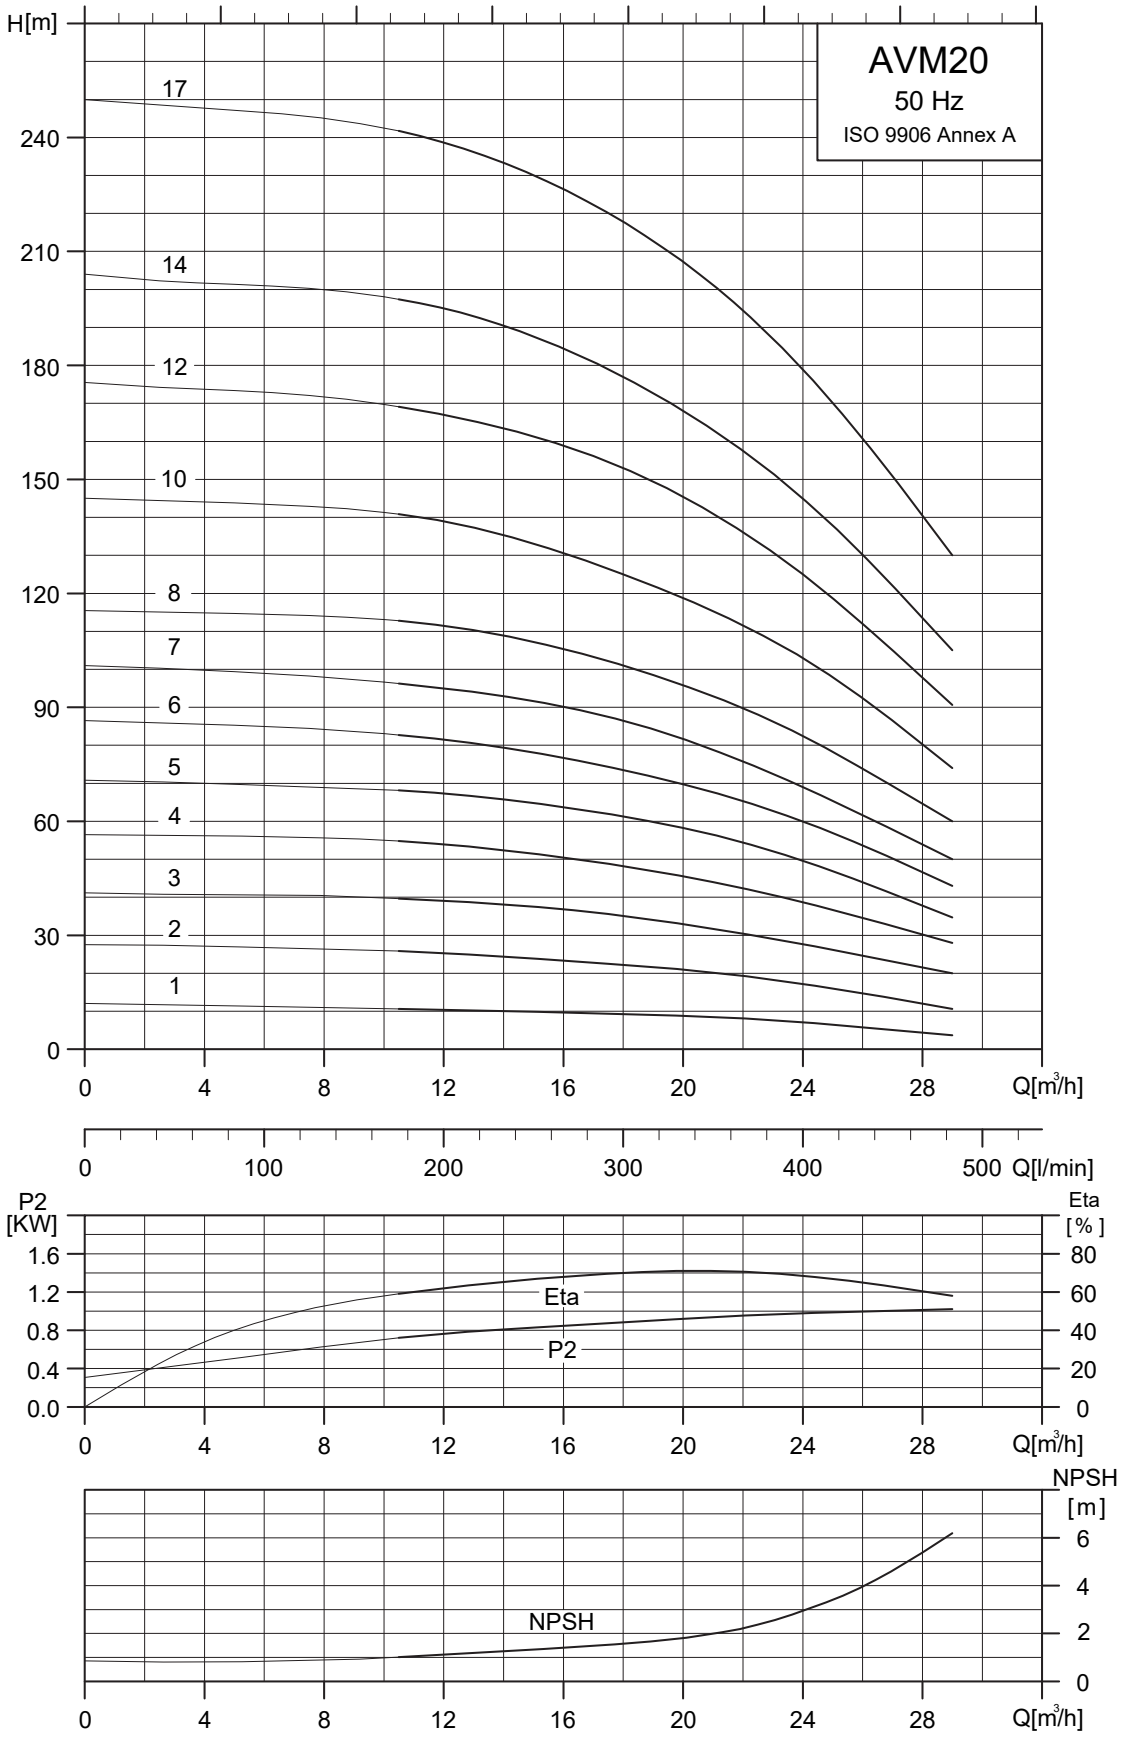
AVM20
50 Hz
ISO 9906 Annex A
H[m]
17
14
12
10
8
7
6
5
4
3
2
1
0
30
60
90
120
150
180
210
240
0
4
8
12
16
20
24
28
Q[m³/h]
0
100
200
300
400
500
Q[l/min]
P2
[KW]
1.6
1.2
0.8
0.4
0.0
Eta
P2
Eta
[%]
80
60
40
20
0
Q[m³/h]
NPSH
[m]
6
4
2
0
NPSH
Q[m³/h]

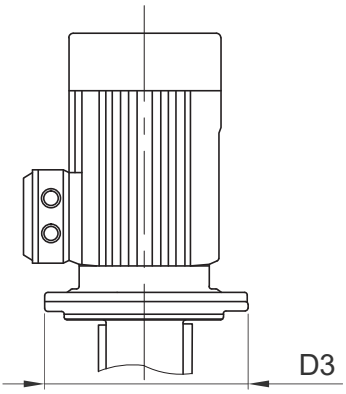


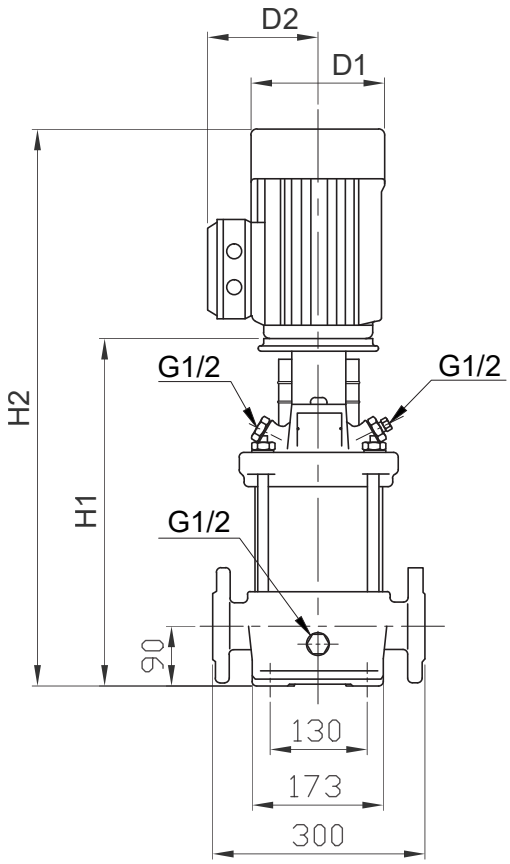


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM20-1	1.1	400	631	141	109	-	42
AVM20-2	2.2	415	690	175	140	-	52.7
AVM20-3	4	465	800	239	162	-	68.4
AVM20-4	5.5	542	902	234	199	300	93.6
AVM20-5	5.5	587	947	234	199	300	95.0
AVM20-6	7.5	632	1032	234	199	300	105.4
AVM20-7	7.5	677	1077	234	199	300	106.8
AVM20-8	11	799	1244	268	235	350	137.9
AVM20-10	11	889	1334	268	235	350	140.7
AVM20-12	15	979	1468	268	235	350	154.5
AVM20-14	15	1069	1558	268	235	350	157.3
AVM20-17	18.5	1204	1739	317	242	400	196.4


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Flange(DIN)
PN 16-25 / DN 50

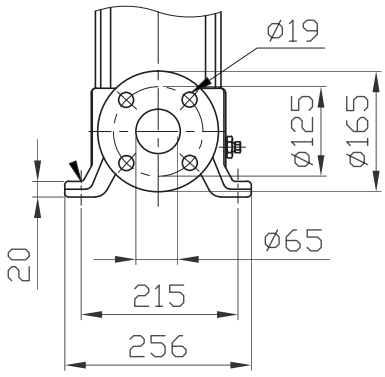


Approved for Drinking Water
AS/NZS 4020

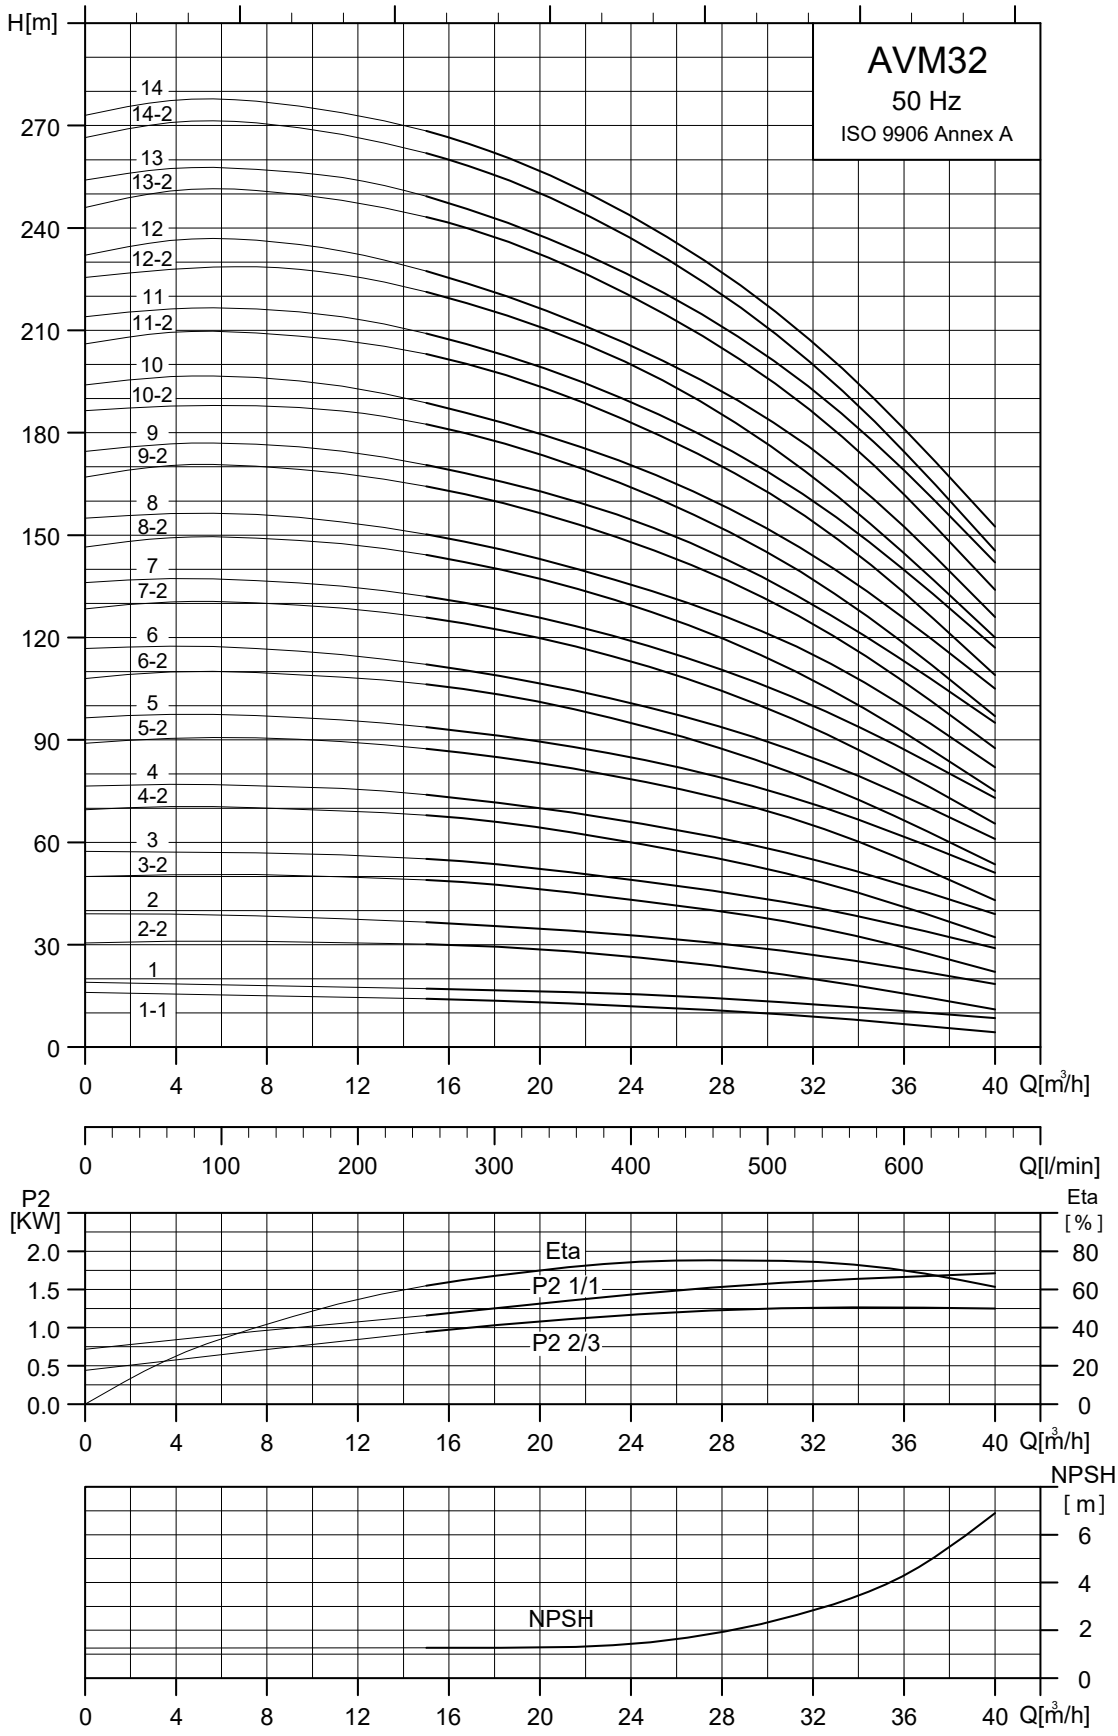
AVM32
50 Hz
ISO 9906 Annex A
H[m]
270
240
210
180
150
120
90
60
30
0
14
14-2
13
13-2
12
12-2
11
11-2
10
10-2
9
9-2
8
8-2
7
7-2
6
6-2
5
5-2
4
4-2
3
3-2
2
2-2
1
1-1
0 4 8 12 16 20 24 28 32 36 40 Q[m³/h]
0 100 200 300 400 500 600 Q[l/min]
P2 [KW]
2.0
1.5
1.0
0.5
0.0
Eta [%]
80
60
40
20
0
Eta
P2 1/1
P2 2/3
0 4 8 12 16 20 24 28 32 36 40 Q[m³/h]
NPSH [m]
6
4
2
0
NPSH
0 4 8 12 16 20 24 28 32 36 40 Q[m³/h]

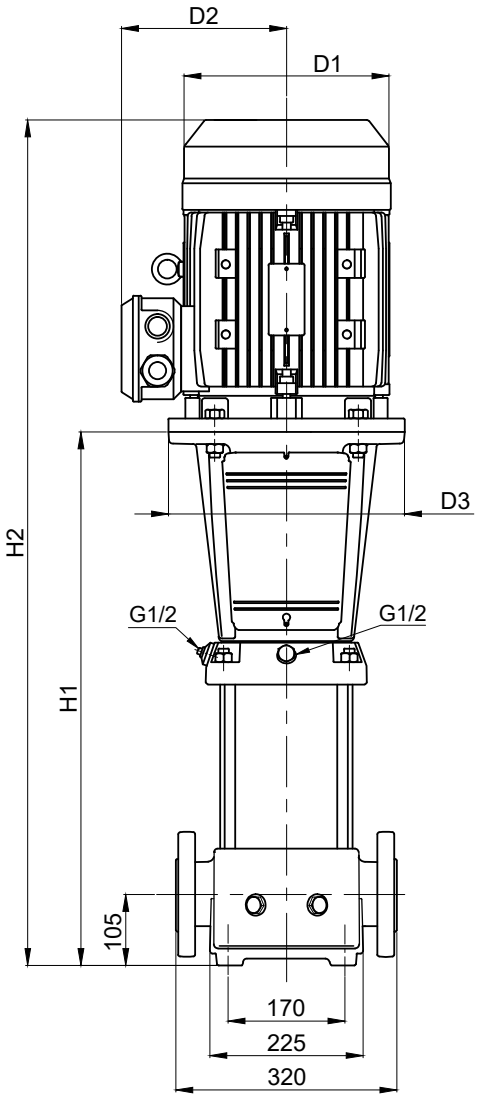


PN16-25-40 / DN65

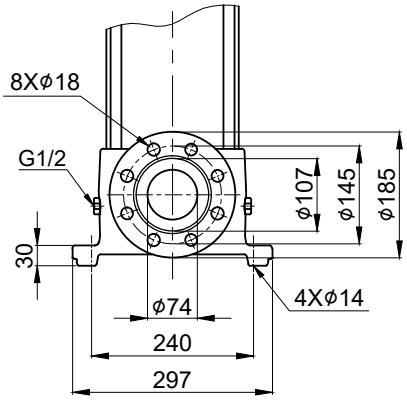


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM32-1-1	1.5	504	779	175	140	-	69.5
AVM32-1	2.2	504	779	175	140	-	71.5
AVM32-2-2	3.0	574	894	196	148	-	80.5
AVM32-2	4.0	574	909	219	162	-	87.5
AVM32-3-2	5.5	644	1004	234	199	300	104.4
AVM32-3	5.5	644	1004	234	199	300	104.4
AVM32-4-2	7.5	714	1114	234	199	300	116.4
AVM32-4	7.5	714	1114	234	199	300	116.4
AVM32-5-2	11.0	894	1339	268	215	350	153.0
AVM32-5	11.0	894	1339	268	215	350	153.0
AVM32-6-2	11.0	964	1409	268	215	350	156.0
AVM32-6	11.0	964	1409	268	215	350	156.0
AVM32-7-2	15.0	1034	1523	268	215	350	170
AVM 32-7	15.0	1034	1523	268	215	350	170
AVM32-8-2	15.0	1104	1593	268	215	350	173
AVM32-8	15.0	1104	1593	268	215	350	173
AVM32-9-2	18.5	1174	1709	317	242	400	211
AVM32-9	18.5	1174	1709	317	242	400	211
AVM32-10-2	18.5	1244	1779	317	242	400	213
AVM32-10	18.5	1244	1779	317	242	400	214
AVM32-11-2	22.0	1314	1893	317	242	400	227
AVM32-11	22.0	1314	1893	317	242	400	227
AVM32-12-2	22.0	1384	1963	317	242	400	229
AVM32-12	22.0	1384	1963	317	242	400	229
AVM32-13-2	30.0	1454	2077	317	290	400	317
AVM32-13	30.0	1454	2077	317	290	400	317
AVM32-14-2	30.0	1524	2147	317	290	400	320
AVM32-14	30.0	1524	2147	317	290	400	320


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

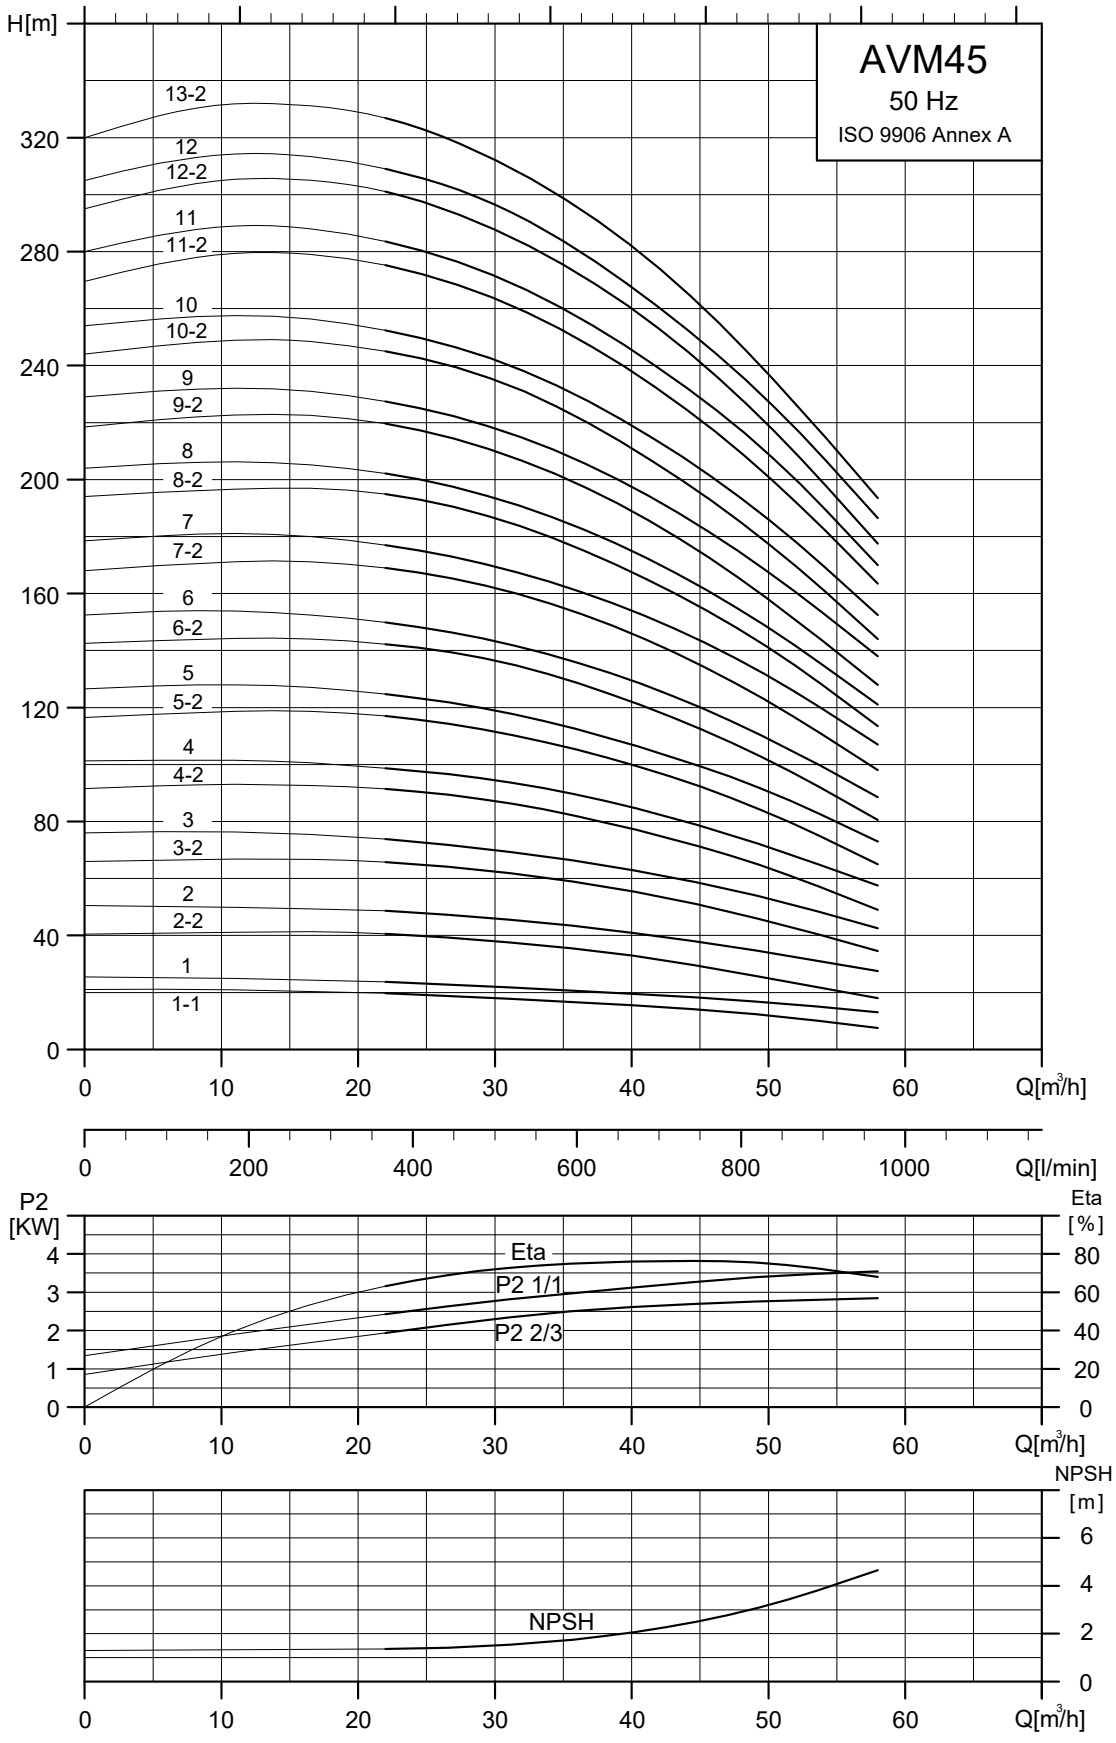
AVM45
50 Hz
ISO 9906 Annex A
H[m]
13-2
12
12-2
11
11-2
10
10-2
9
9-2
8
8-2
7
7-2
6
6-2
5
5-2
4
4-2
3
3-2
2
2-2
1
1-1
0
40
80
120
160
200
240
280
320
0
10
20
30
40
50
60
Q[m³/h]
0
200
400
600
800
1000
Q[l/min]
P2
[KW]
Eta
[%]
Eta
P2 1/1
P2 2/3
0
1
2
3
4
0
20
40
60
80
Q[m³/h]
NPSH
[m]
NPSH
0
2
4
6
Q[m³/h]

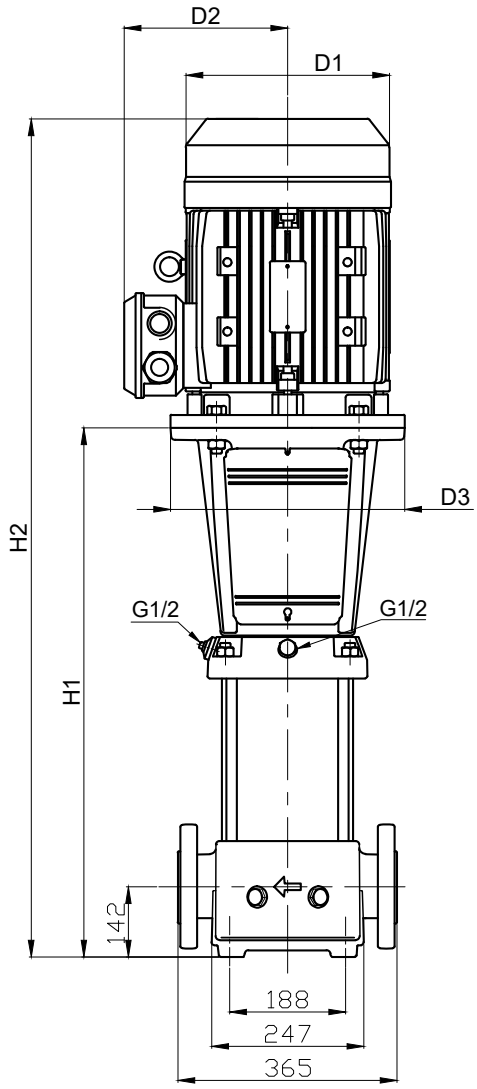


PN16-25-40 / DN80

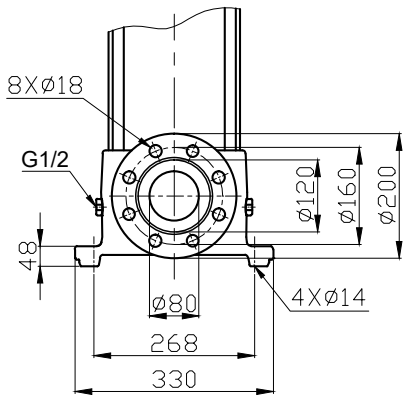


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM45-1-1	3.0	881	881	196	148	280	87.8
AVM45-1	4.0	896	896	219	162	280	94.8
AVM45-2-2	5.5	1001	1001	234	199	300	112.3
AVM45-2	7.5	1041	1041	234	199	300	121.4
AVM45-3-2	11.0	1276	1276	268	215	350	158.6
AVM45-3	11.0	1276	1276	268	215	350	158.6
AVM45-4-2	15.0	1400	1400	268	215	350	173.3
AVM45-4	15.0	1400	1400	268	215	350	173.3
AVM45-5-2	18.5	1526	1526	317	242	350	211.9
AVM45-5	18.5	1526	1526	317	242	350	211.9
AVM45-6-2	22.0	1650	1650	317	242	350	226.4
AVM45-6	22.0	1650	1650	317	242	350	226.4
AVM45-7-2	30.0	1774	1774	317	290	400	315.3
AVM45-7	30.0	1774	1774	317	290	400	315.3
AVM45-8-2	30.0	1854	1854	317	290	400	318.9
AVM45-8	30.0	1854	1854	317	290	400	319.0
AVM45-9-2	30.0	1934	1934	317	290	400	322.6
AVM45-9	37.0	2036	2036	398	365	400	391.6
AVM45-10-2	37.0	2116	2116	398	365	400	395.2
AVM45-10	37.0	2116	2116	398	365	400	395.2
AVM45-11-2	45.0	2196	2196	398	365	450	426.8
AVM45-11	45.0	2196	2196	398	365	450	426.8
AVM45-12-2	45.0	226	226	398	365	450	430.4
AVM45-12	45.0	2276	2276	398	365	450	430.4
AVM45-13-2	45.0	2356	2356	398	365	450	434.0


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

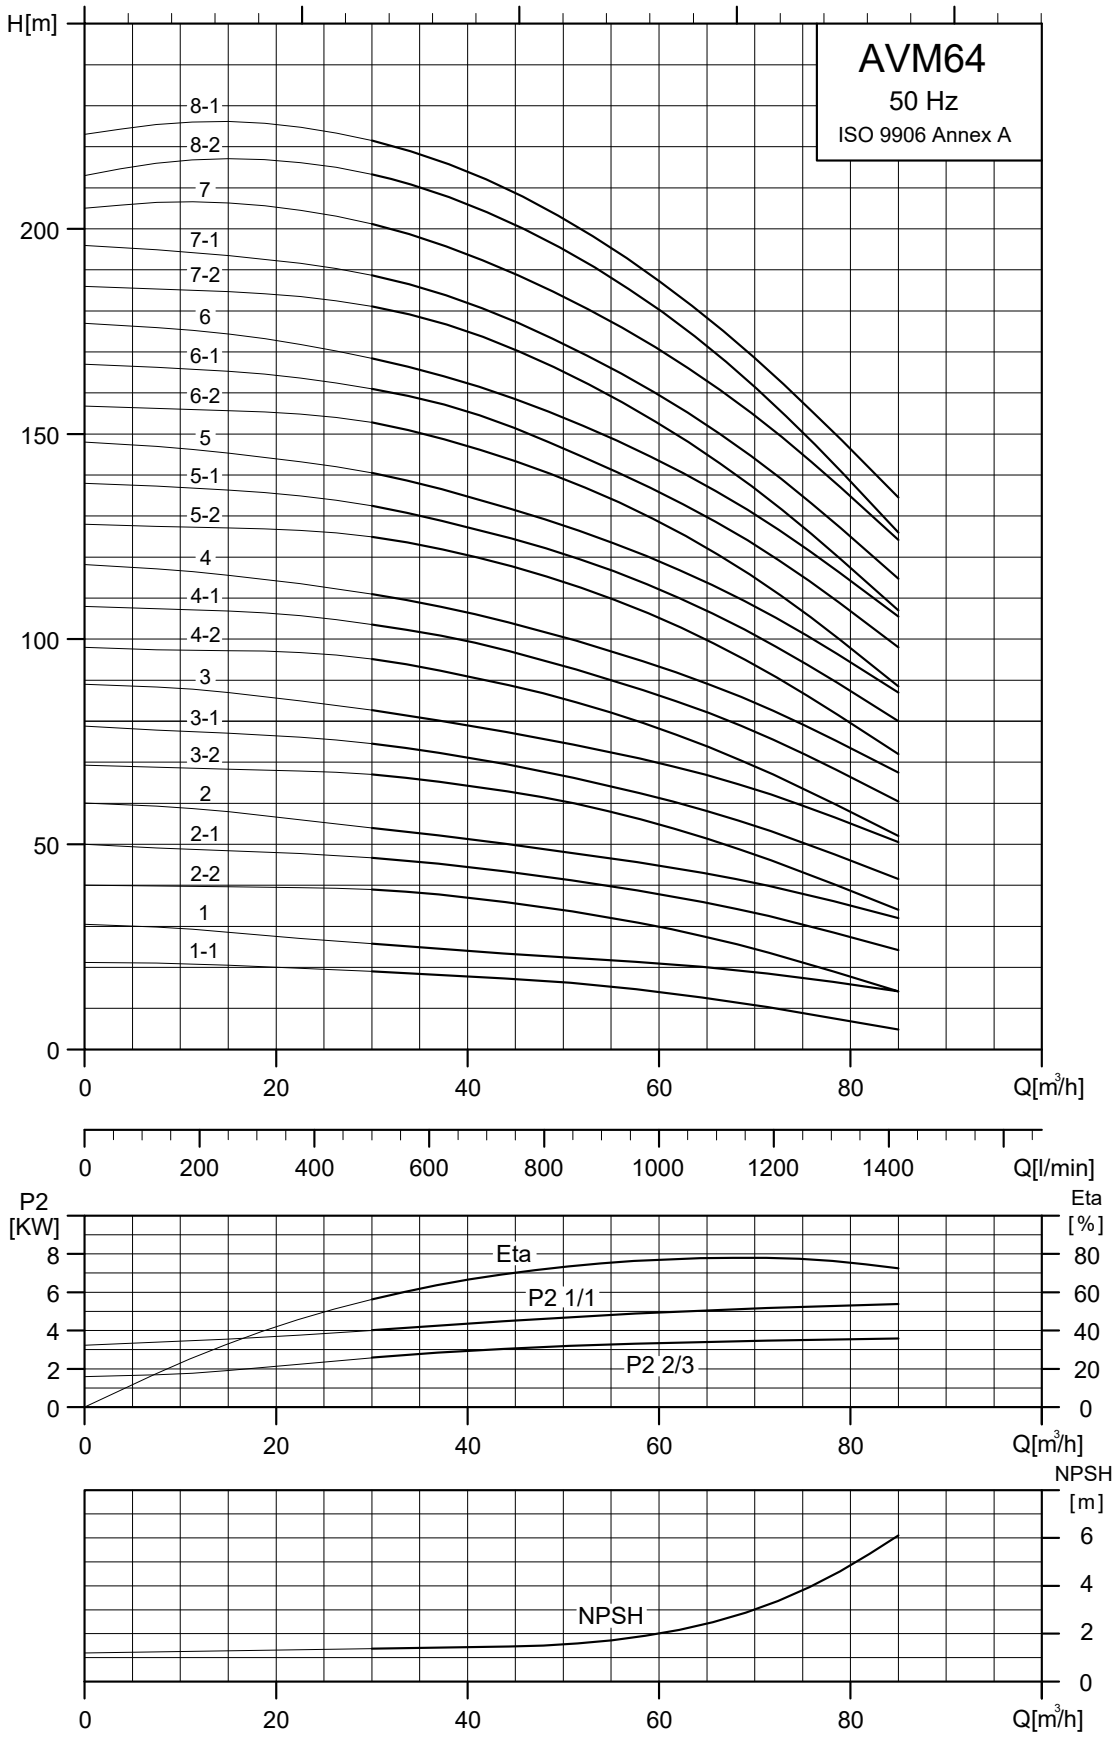
AVM64
50 Hz
ISO 9906 Annex A
H[m]
8-1
8-2
7
7-1
7-2
6
6-1
6-2
5
5-1
5-2
4
4-1
4-2
3
3-1
3-2
2
2-1
2-2
1
1-1
0
50
100
150
200
0
20
40
60
80
Q[m³/h]
0
200
400
600
800
1000
1200
1400
Q[l/min]
P2
[KW]
Eta
[%]
Eta
P2 1/1
P2 2/3
0
2
4
6
8
0
20
40
60
80
Q[m³/h]
NPSH
[m]
NPSH
0
2
4
6
0
20
40
60
80
Q[m³/h]

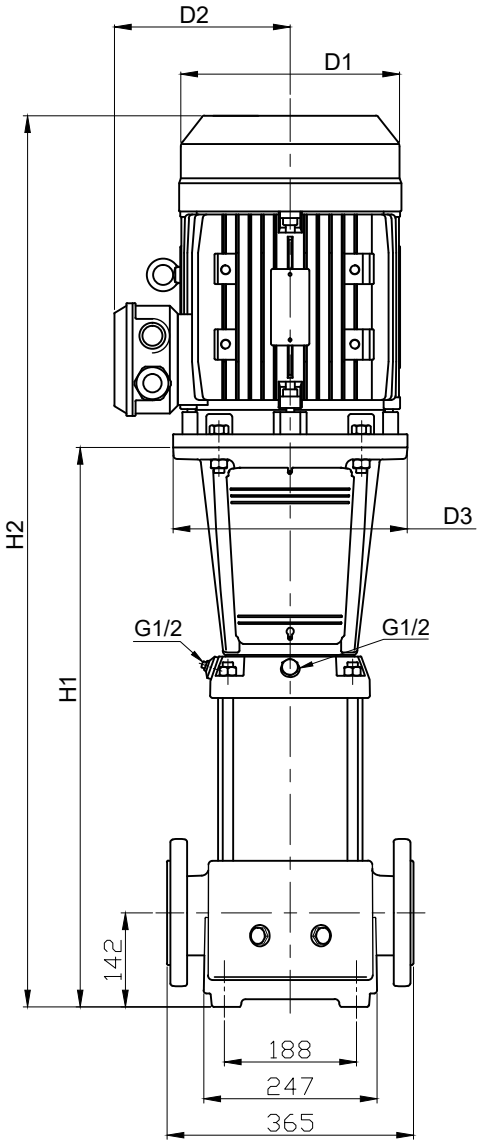


Flange (DIN)
PN16 / DN100

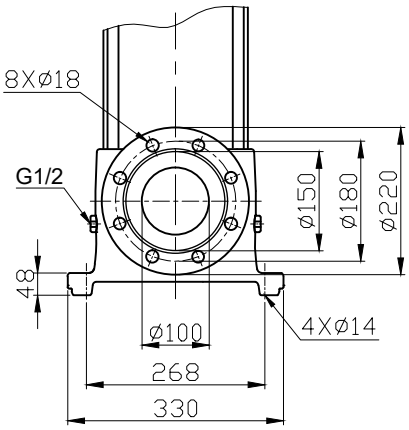


MODEL	MOTOR	AVM DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM64-1-1	4.0	563	898	219	162	280	88.76
AVM64-1	5.5	563	923	234	199	300	102.64
AVM64-2-2	7.5	646	1046	234	199	300	115.58
AVM64-2-1	11.0	756	1201	268	215	350	149.16
AVM64-2	11.0	756	1201	268	215	350	149.16
AVM64-3-2	15.0	838	1327	268	215	350	164.62
AVM64-3-1	15.0	838	1327	268	215	350	146.62
AVM64-3	18.5	838	1373	317	242	350	199.62
AVM64-4-2	18.5	921	1456	317	242	350	203.52
AVM64-4-1	22.0	921	1500	317	242	350	214.28
AVM64-4	22.0	921	1500	317	242	350	214.28
AVM64-5-2	30.0	1003	1626	317	290	400	303.43
AVM64-5-1	30.0	1003	1626	317	290	400	303.43
AVM64-5	30.0	1003	1626	317	290	400	303.43
AVM64-6-2	30.0	1086	1790	317	290	400	307.29
AVM64-6-1	37.0	1086	1811	398	365	400	376.29
AVM64-6	37.0	1086	1811	398	365	400	376.29
AVM64-7-2	37.0	1168	1893	398	365	400	380.24
AVM64-7-1	37.0	1168	1893	398	365	400	380.24
AVM64-7	45.0	1172	1897	398	365	450	408.24
AVM64-8-2	45.0	1255	1980	398	365	450	412.24
AVM64-8-1	45.0	1255	1980	398	365	450	412.24

* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Approved for Drinking Water
AS/NZS 4020

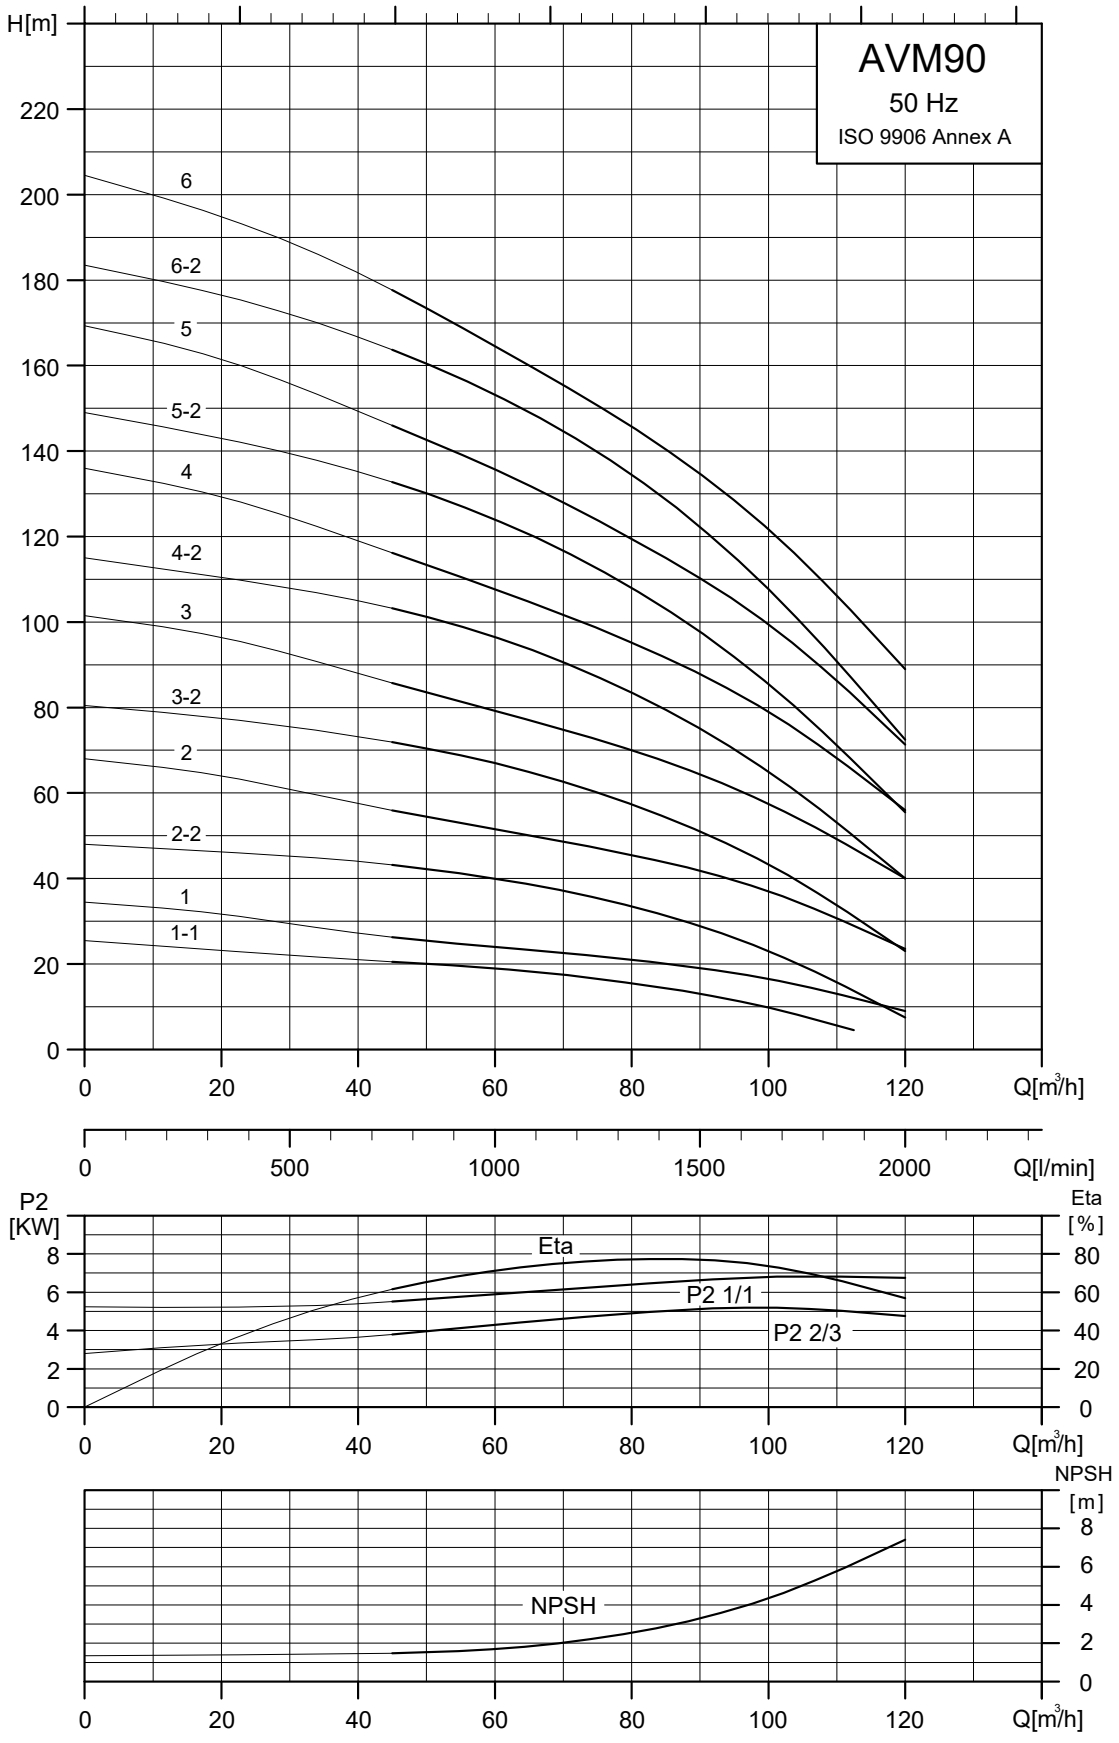

AVM90
50 Hz
ISO 9906 Annex A
H[m]
6
6-2
5
5-2
4
4-2
3
3-2
2
2-2
1
1-1
Q[m³/h]
Q[l/min]
P2 [KW]
Eta [%]
Eta
P2 1/1
P2 2/3
NPSH [m]
NPSH

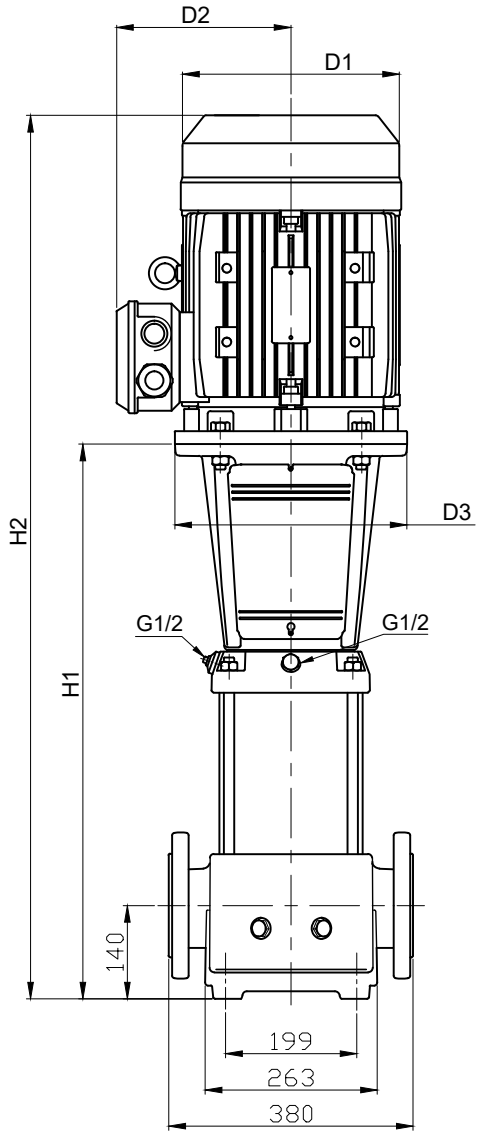


MODEL	MOTOR	AVM					
		DIMENSION [MM]					
	P2	DIN FLANGE		D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2				
AVM90-1-1	5.5	572	932	234	199	300	116.06
AVM90-1	7.5	572	972	234	199	300	125.08
AVM90-2-2	11.0	744	1219	268	215	350	163.82
AVM90-2	15.0	744	1263	268	215	350	174.86
AVM90-3-2	18.5	866	1401	317	242	350	214.94
AVM90-3	22.0	866	1445	317	242	350	225.74
AVM90-4-2	30.0	958	1581	317	290	400	316.08
AVM90-4	30.0	958	1581	317	290	400	316.12
AVM90-5-2	37.0	1050	1775	398	365	400	391.48
AVM90-5	37.0	1050	1775	398	365	400	391.52
AVM90-6-2	45.0	1142	1867	398	365	450	424.58
AVM90-6	45.0	1142	1867	398	365	450	424.62

* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

Flange (DIN)
PN16 / DN100

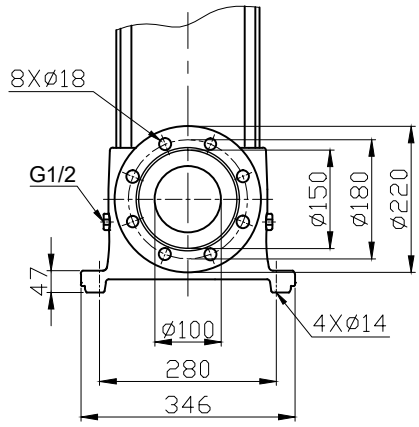


Approved for Drinking Water
AS/NZS 4020

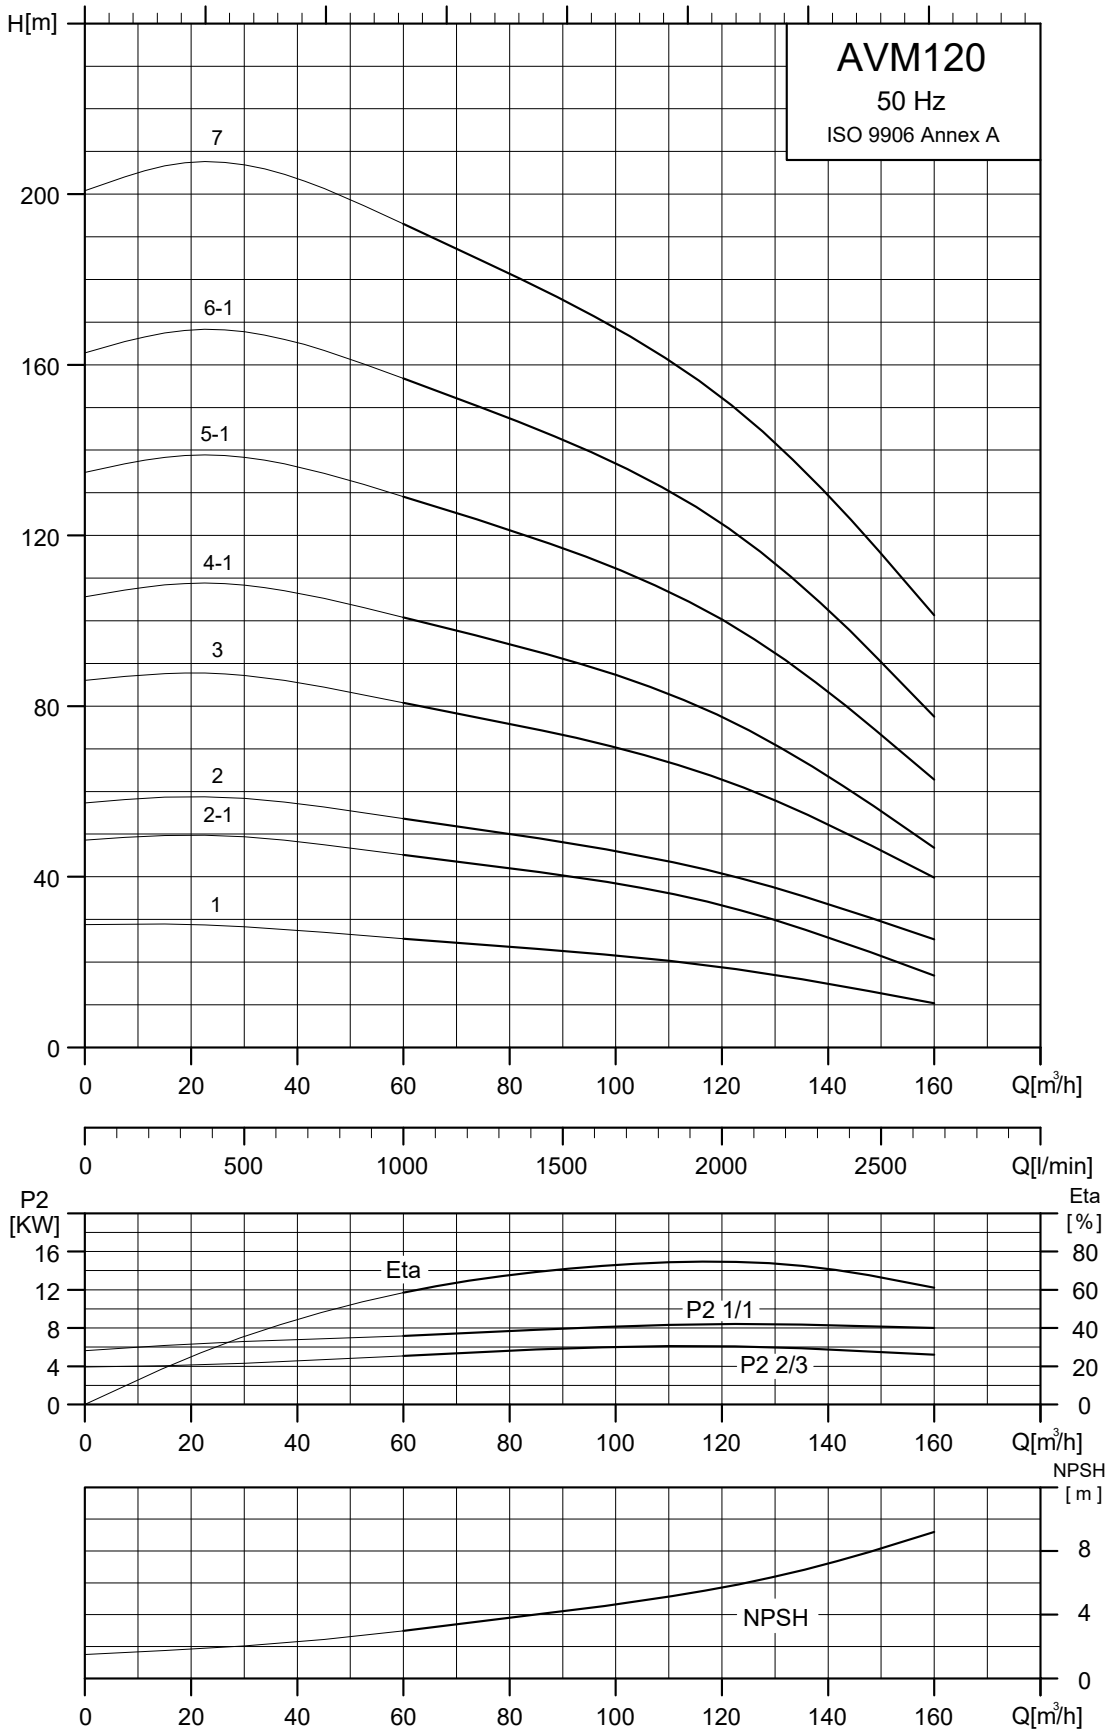

AVM120
50 Hz
ISO 9906 Annex A
H[m]
7
6-1
5-1
4-1
3
2
2-1
1
0
40
80
120
160
200
0 20 40 60 80 100 120 140 160 Q[m³/h]
0 500 1000 1500 2000 2500 Q[l/min]
P2 [KW]
Eta [%]
Eta
P2 1/1
P2 2/3
0 4 8 12 16
0 20 40 60 80
0 20 40 60 80 100 120 140 160 Q[m³/h]
NPSH [m]
NPSH
0 4 8
0 20 40 60 80 100 120 140 160 Q[m³/h]

MODEL	MOTOR	AVM						
		DIMENSION [MM]						
	P2	DIN FLANGE			D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2	H3				
AVM120-1-1	11	834	505	1339	318	245	350	116.06
AVM120-2-1	18.5	990	550	1540	318	245	350	125.08
AVM120-2	22	990	580	1570	358	265	350	163.82
AVM120-3	30	1145	660	1805	420	295	400	174.86
AVM120-4-1	37	1301	660	1961	420	295	400	214.94
AVM120-5-1	45	1460	690	2150	470	325	450	225.74
AVM120-6-1	55	1642	770	2412	510	355	550	316.08
AVM12-7	75	1797	845	2642	580	410	550	316.12


* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

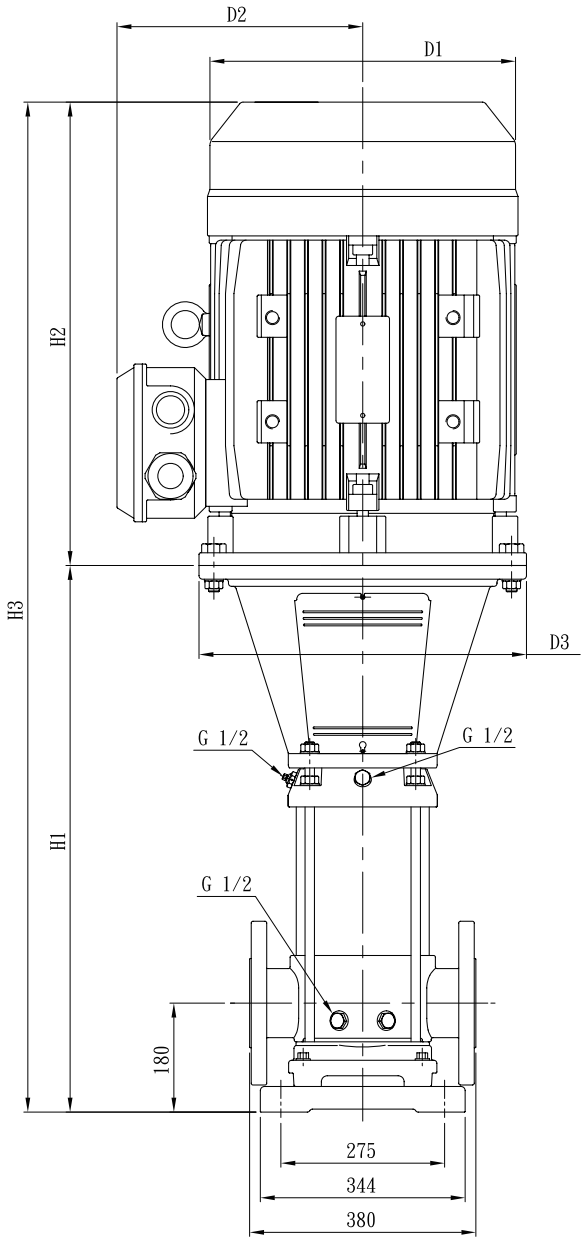

Flange (DIN)
PN25-40 / DN125

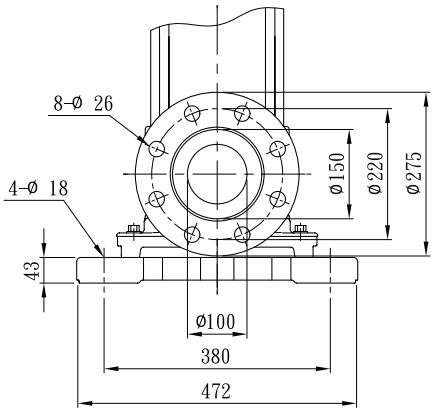


Approved for Drinking Water
AS/NZS 4020

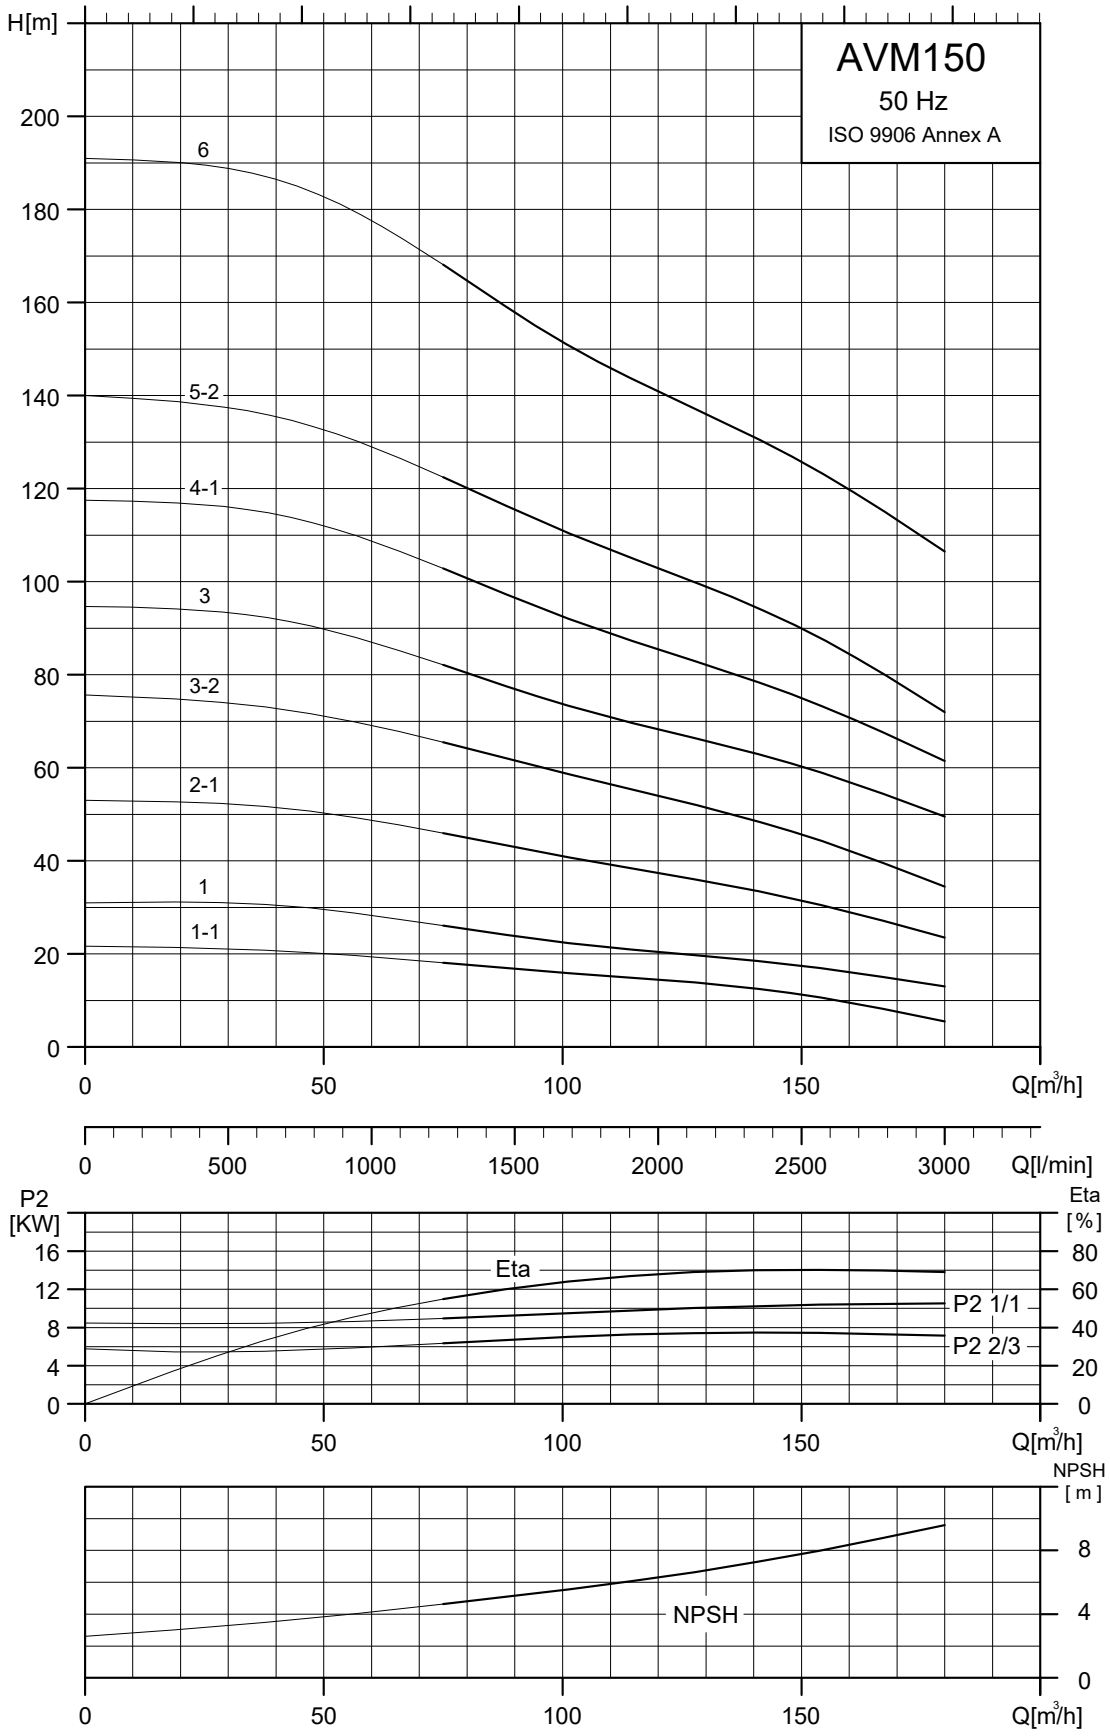

AVM150
50 Hz
ISO 9906 Annex A
H[m]
200
180
160
140
120
100
80
60
40
20
0
6
5-2
4-1
3
3-2
2-1
1
1-1
0
50
100
150
Q[m³/h]
0
500
1000
1500
2000
2500
3000
Q[l/min]
P2
[KW]
16
12
8
4
0
Eta
[%]
80
60
40
20
0
Eta
P2 1/1
P2 2/3
NPSH
[m]
8
4
0
NPSH

MODEL	MOTOR	AVM						
		DIMENSION [MM]						
	P2	DIN FLANGE			D1	D2	D3	NET WEIGHT (KG)
	kW	H1	H2	H3				
SB 150-1-1	11	834	505	1339	318	245	350	200.0
SB 150-1	15	834	510	1344	318	245	350	210.1
SB 150-2-1	22	990	580	1570	358	265	350	287.8
SB 150-3-2	30	1145	660	1805	420	295	400	362.3
SB 150-3	37	1145	660	1805	420	295	400	375.4
SB 150-4-1	45	1305	690	1995	470	325	450	443.4
SB 150-5-2	55	1486	770	2256	510	355	550	568.7
SB 15-6	75	1642	845	2487	580	410	550	741.0

* Weights are indicative and may change with different motor make and type
* H2 dimension varies with motor make and type

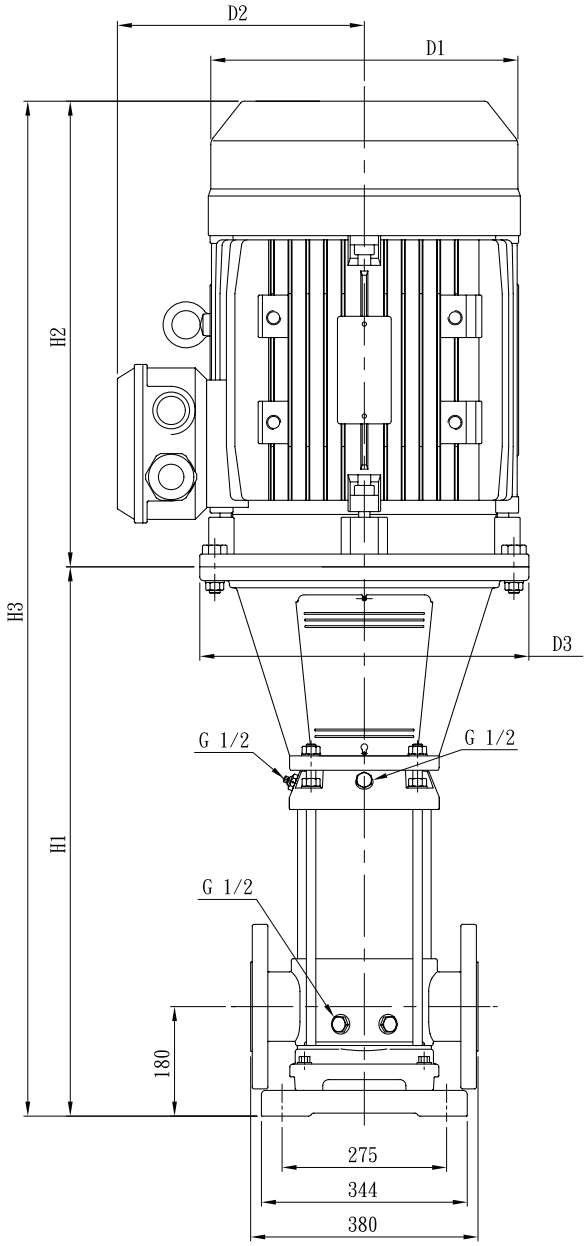

Flange (DIN)
PN25-40 / DN125

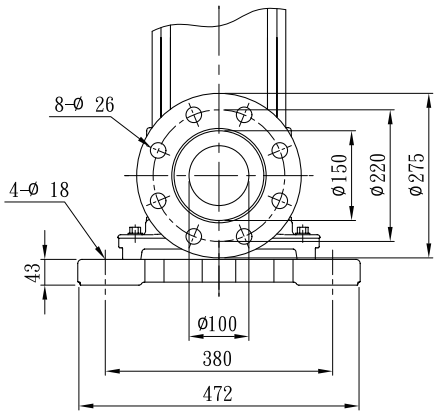

Approved for Drinking Water
AS/NZS 4020