Product Description

High flow vortex submersible sump pumps with a choice of single or three phase motors

Applications

- Grey water pumping
- Sump emptying
- Septic effluent disposal
- Water transfer
- Pumping of light slurries and factory waste

Features

- Open impeller, vortex, centrifugal design
- Able to pump soft solids in suspension
- Less susceptible to blockage
- Capable of higher flows

Suitable Fluids

Clean or 'grey water' of neutral pH containing up to 20% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension




Features & Benefits

- Ideal for waste water applications containing soft or fibrous solids
- Industrial waste water drainage
- Miscellaneous drainage
- Double mechanical seal in oil chamber provides strong and reliable shaft sealing
- Quick acting dual response provides protection against overload.
- Automatic operation - equipped with float switch and control box is optional
- Semi-vortex impeller offers non-clog operations with high pumping efficiency and allows pumping the water containing impurities under 70% of the discharge size.
- For the semi-vortex design with no strainer or close tolerance suction cover, only 3 or 4 bolts need to be removed for quick and easy maintenance.



Performance Curve

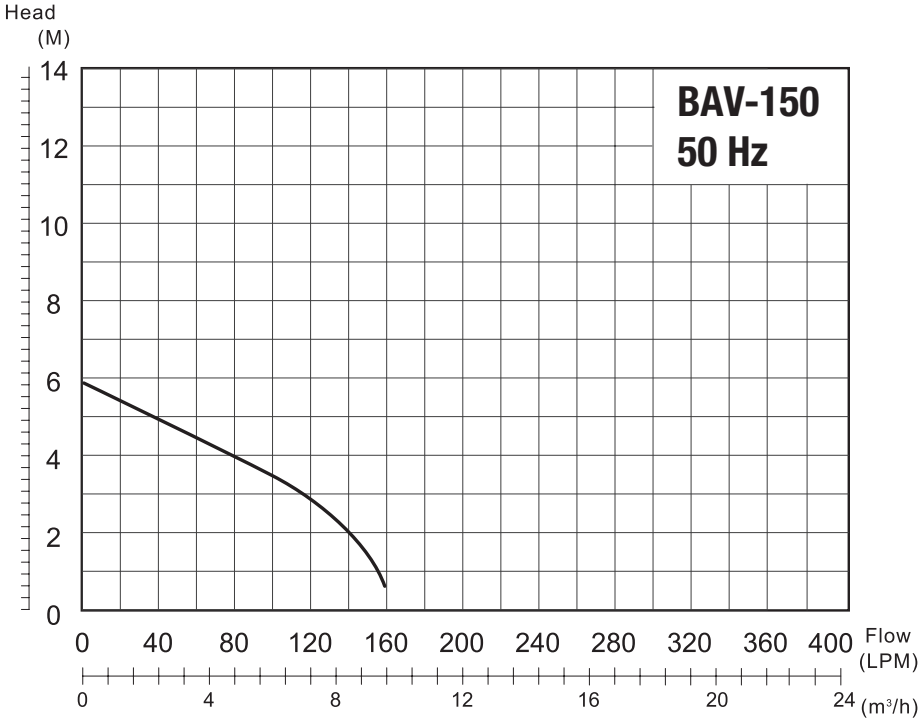

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.2	0.15	1.5	0°C to 40°C	240V	Auto	32	10M


OUTLET		FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		1.5M	3M	4.5M	6M	7.5M		L X W X H (MM)	
32	1-1/4"	160	150	115	60	-	-	6	186 X 131 X 304	7

Features & Benefits

- Ideal for waste water applications containing soft or fibrous solids
- Industrial waste water drainage
- Miscellaneous drainage
- Double mechanical seal in oil chamber provides strong and reliable shaft sealing
- Quick acting dual response provides protection against overload.
- Automatic operation - equipped with float switch and control box is optional
- Semi-vortex impeller offers non-clog operations with high pumping efficiency and allows pumping the water containing impurities under 70% of the discharge size.
- For the semi-vortex design with no strainer or close tolerance suction cover, only 3 or 4 bolts need to be removed for quick and easy maintenance.



Performance Curve

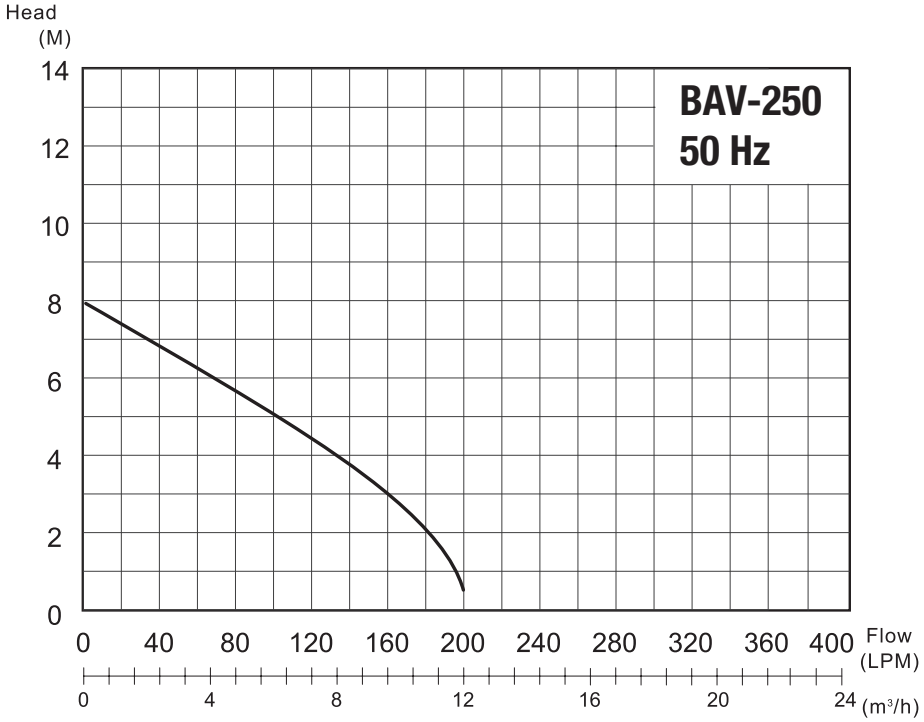

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.33	0.25	2.0	0°C to 40°C	240V	Auto	40	10M


OUTLET		FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		1.5M	3M	4.5M	6M	7.5M		L X W X H (MM)	
40	1-1/2"	200	190	160	120	70	15	8	196 X 121 X 314	9

Features & Benefits

- Ideal for waste water applications containing soft or fibrous solids
- Industrial waste water drainage
- Miscellaneous drainage
- Double mechanical seal in oil chamber provides strong and reliable shaft sealing
- Quick acting dual response provides protection against overload.
- Automatic operation - equipped with float switch and control box is optional
- Semi-vortex impeller offers non-clog operations with high pumping efficiency and allows pumping the water containing impurities under 70% of the discharge size.
- For the semi-vortex design with no strainer or close tolerance suction cover, only 3 or 4 bolts need to be removed for quick and easy maintenance.



Performance Curve

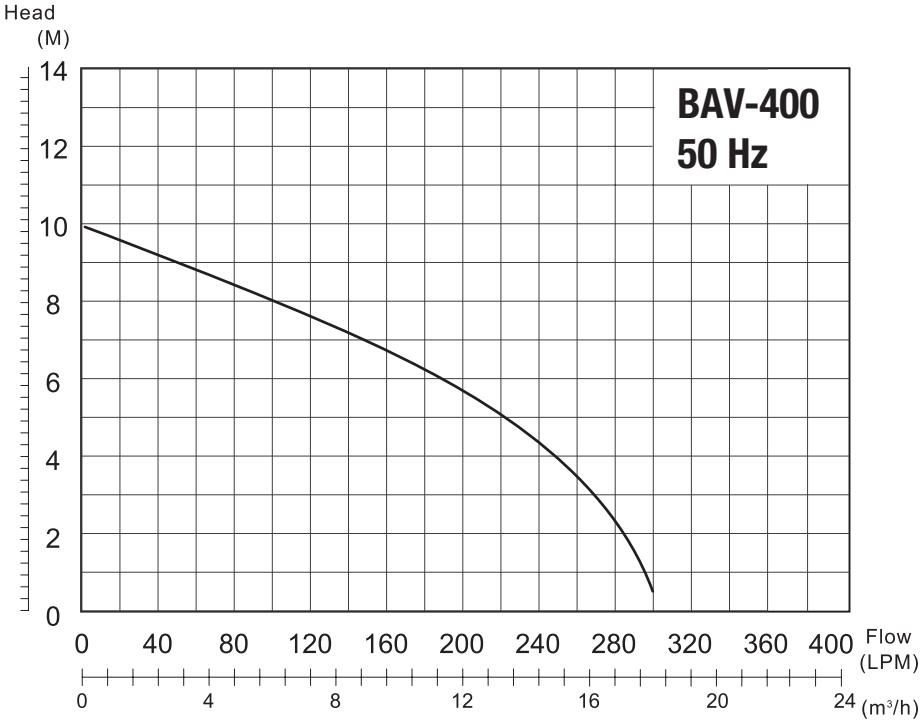

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.53	0.40	3.7	0°C to 40°C	240V	Auto	50	10M


OUTLET		FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		1.5M	3M	4.5M	6M	7.5M		L X W X H (MM)	
50	2"	300	290	270	235	185	125	10	224 X 143 X 350	11

Features & Benefits

- Ideal for waste water applications containing soft or fibrous solids
- Industrial waste water drainage
- Miscellaneous drainage
- Double mechanical seal in oil chamber provides strong and reliable shaft sealing
- Quick acting dual response provides protection against overload.
- Automatic operation - equipped with float switch and control box is optional
- Semi-vortex impeller offers non-clog operations with high pumping efficiency and allows pumping the water containing impurities under 70% of the discharge size.
- For the semi-vortex design with no strainer or close tolerance suction cover, only 3 or 4 bolts need to be removed for quick and easy maintenance.



Performance Curve

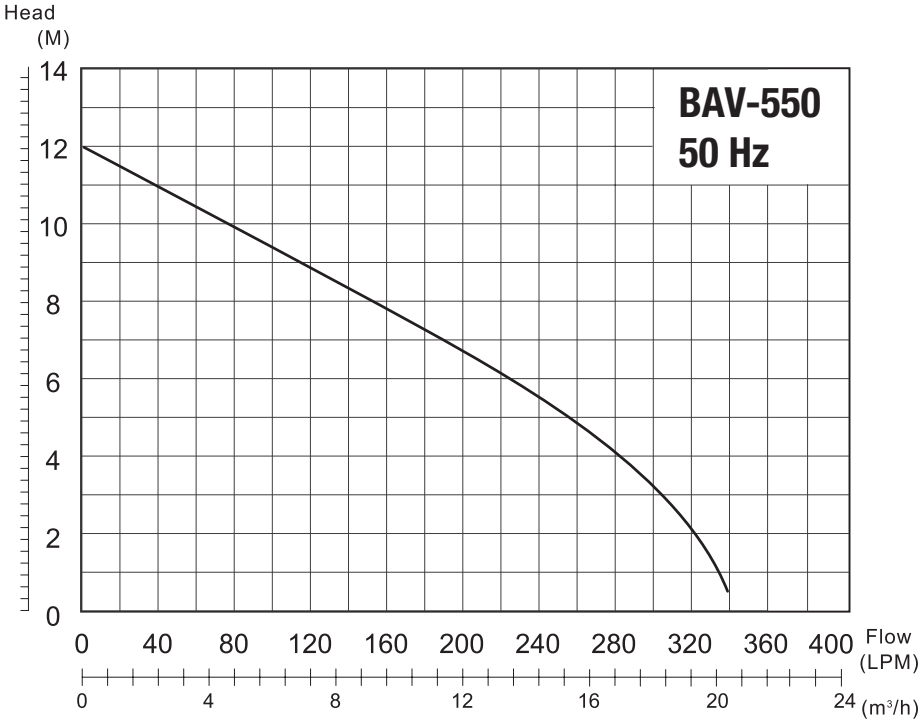

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	0.73	0.55	5	0°C to 40°C	240V	Auto/Manual	50	10M

OUTLET		FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		1.5M	3M	4.5M	6M	7.5M		L X W X H (MM)	
50	2"	340	330	305	270	225	170	12	224 X 144 X 350	11


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Single phase 240V
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 33mm
- Maximum starts per hour: 20



Performance Curve

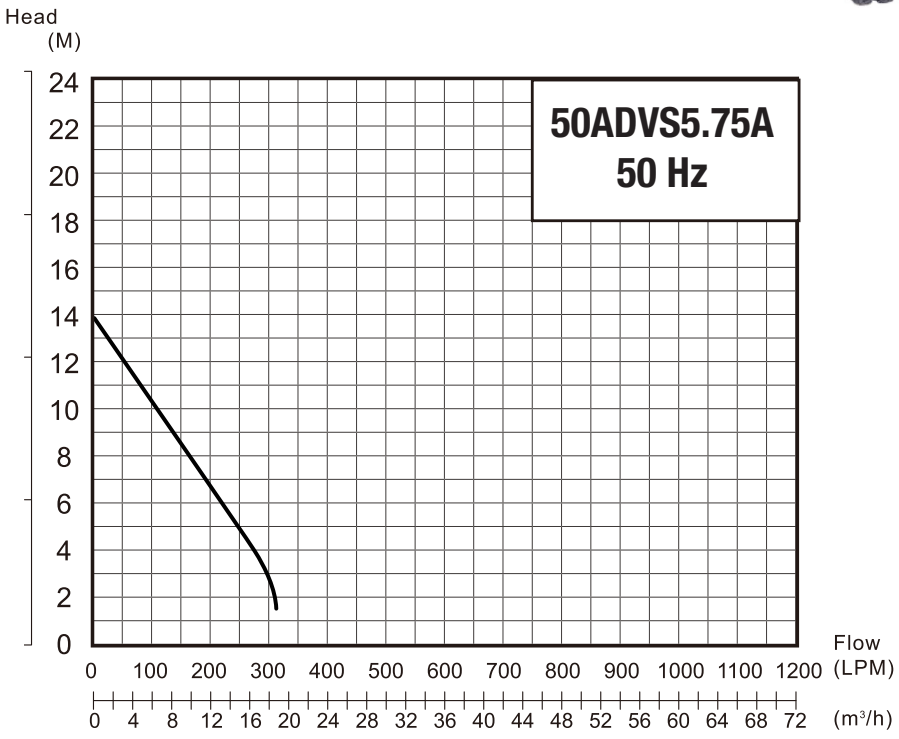

Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	1	0.75	6	0°C to 40°C	240V	Auto	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
50	2"	320	30	230	140	55	-	14	271 x 218 x 400	21


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 33mm
- Maximum starts per hour: 20

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

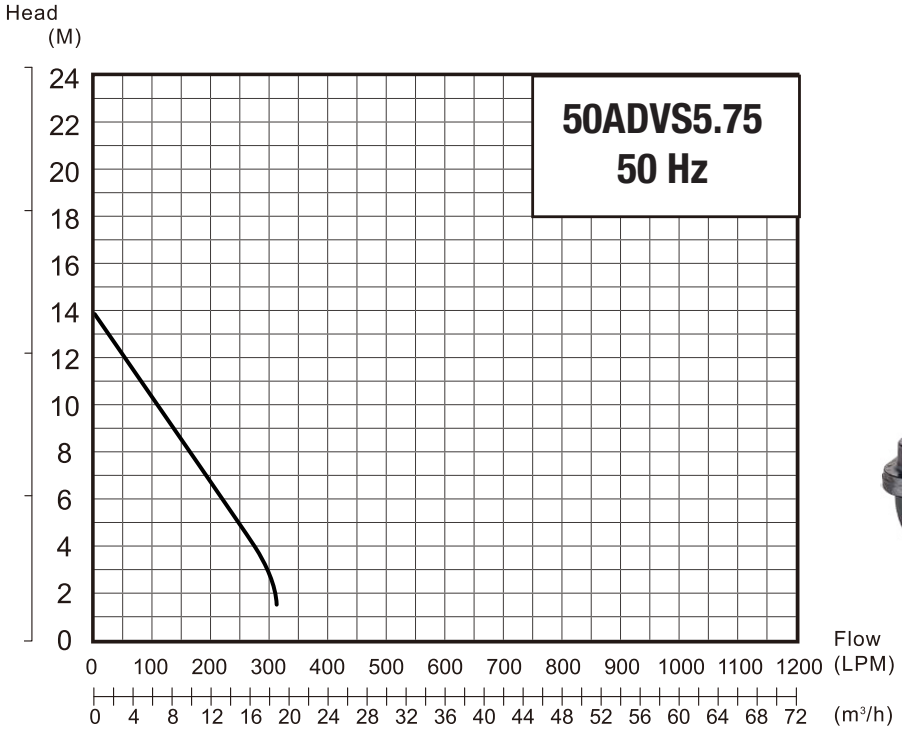



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	1	0.75	1.5	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
50	2"	320	30	230	140	55	-	14	271 x 218 x 400	21


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 31mm
- Maximum starts per hour: 20

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

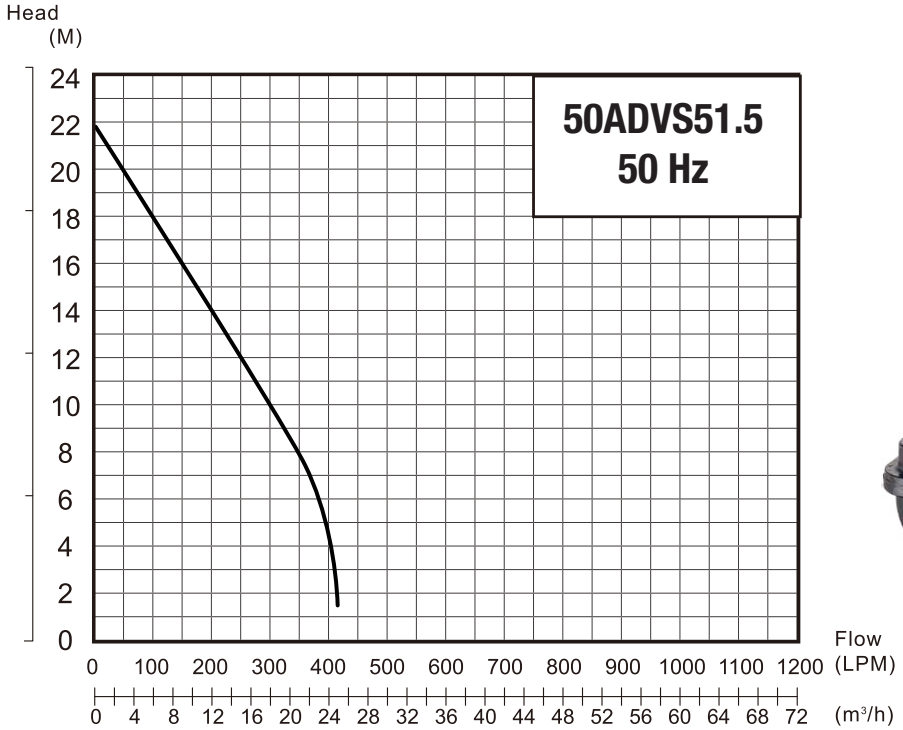



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	2	1.5	3	0°C to 40°C	415V	Manual	50	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
50	2"	420	415	390	330	250	170	22	271 x 218 x 443	30


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 45mm
- Maximum starts per hour: 20

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

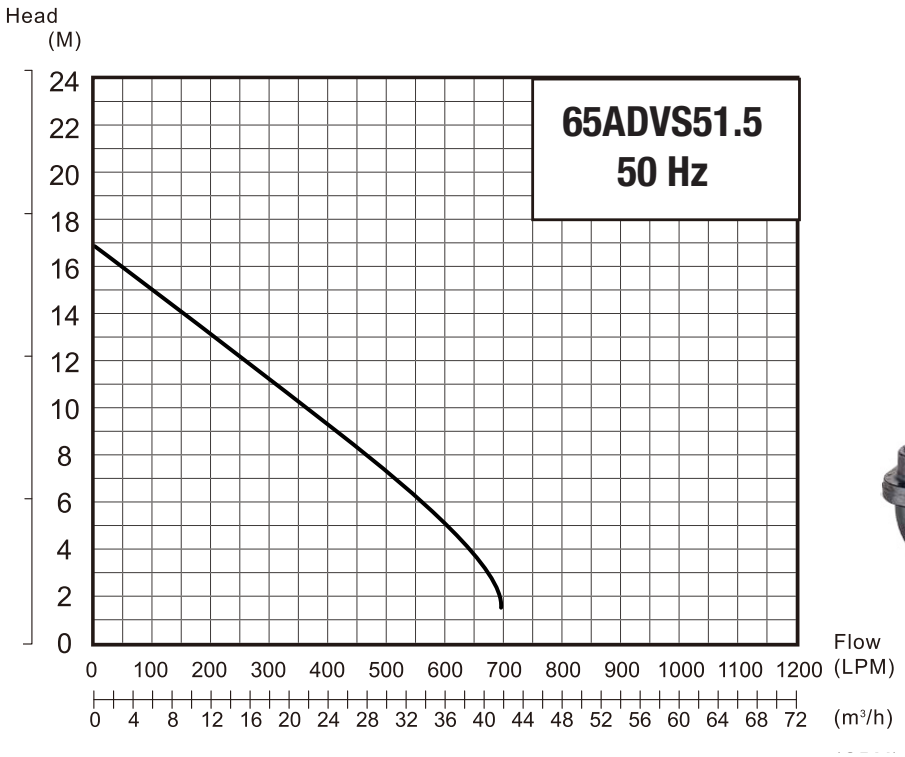



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	2	1.5	3	0°C to 40°C	415V	Manual	65	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
65	2.5"	700	680	560	420	250	90	17	398 x 244 x 600	46


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 50mm
- Maximum starts per hour: 20

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

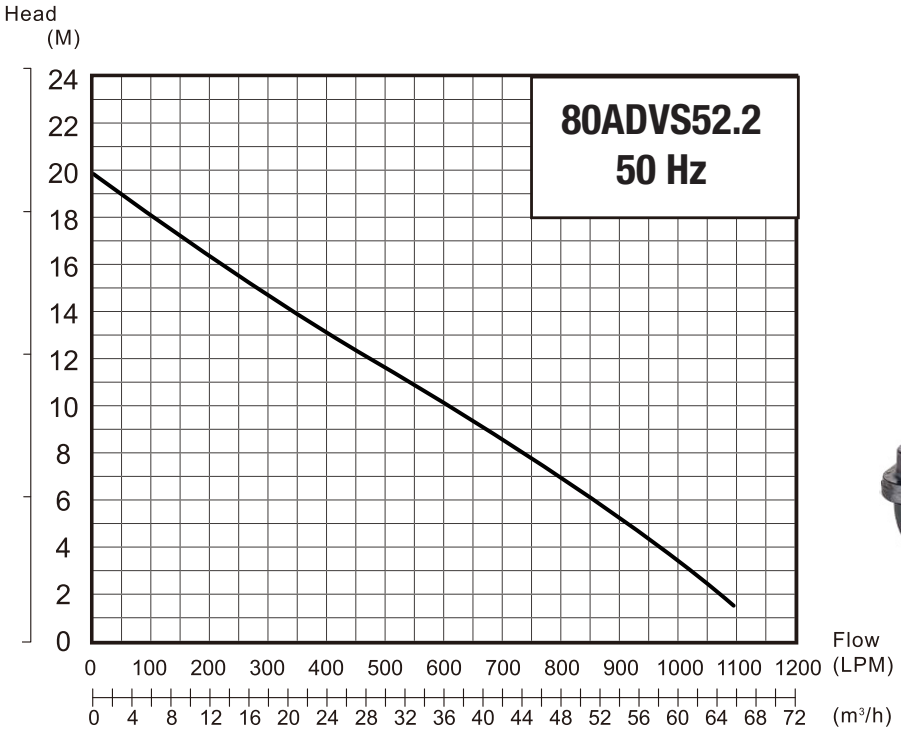



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	3	2.2	4.5	0°C to 40°C	415V	Manual	80	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
80	3"	1100	1020	860	680	480	280	20	449 x 281 x 723	64


Features & Benefits

Submersible drainage pump suitable for drainage of greywater and stormwater from building basements and sumps in domestic, commercial and industrial applications. Can be installed free standing or mounted on optional guide rails.

- Three phase 415V 50Hz 2 pole induction motor
- Pump body: Cast iron
- Impeller: Cast iron
- Mechanical seal: Ceramic-Graphite, Silicon Carbide alloy
- Submersible depth: 8m
- Liquid temperature up to + 40°C
- Ambient temperature up to + 40°C
- Passage of suspended solid up to 30mm
- Maximum starts per hour: 20

These are 415V manual pumps. Remember to order your control panel and floats

Performance Curve

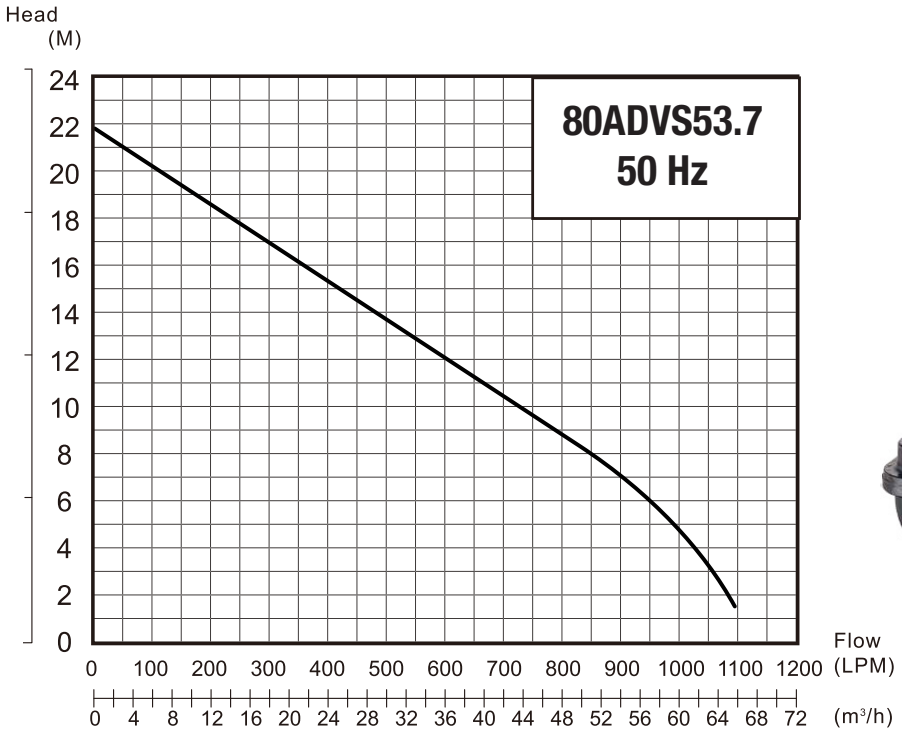



Specifications

TYPE	HP	KW	CONTINUOUS AMP RATING	OPERATING TEMPERATURE	VOLTAGE	AUTO/ MANUAL	DISCHARGE (MM)	CABLE LENGTH
Vortex	5	3.7	7.5	0°C to 40°C	415V	Manual	80	10M

OUTLET		MAX FLOW (LPM)	FLOW AT M HEAD (LPM)					MAX HEAD (MM)	DIMENSIONS	WEIGHT (KG)
MM	INCH		3M	6M	9M	12M	15M		L X W X H (MM)	
80	3"	1100	1060	960	800	600	420	22	449 x 281 x 723	68