
KWIKFLO PUMP STATIONS & TRADE WASTE

Kwikflo Undersink Pumpstations

Kwikflo Undersinks are an automatic system designed to handle sink and basin waste where it is not possible to achieve gravity fall to sewer. It incorporates a small electric submersible pump and is available in a variety of capacities and materials.




Sizing Guide

The below table can help with rough estimations as to sizing and model selection. Indicative only.


Tank Size	Capacity (approx.)
40L	20 People / 1 Dishwasher
80L	40 People / 2 Dishwashers

Plumbing Guide

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

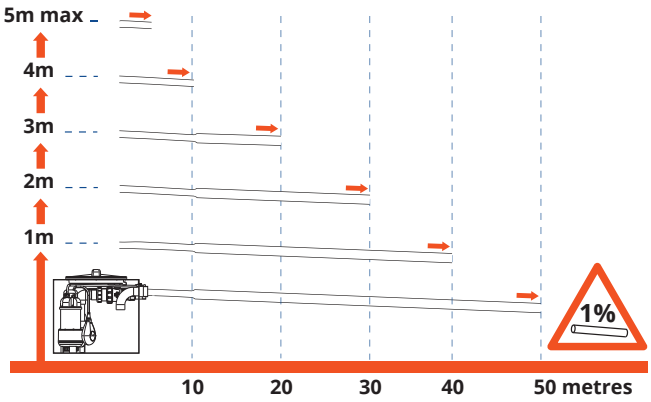

Typical Kitchen Installation

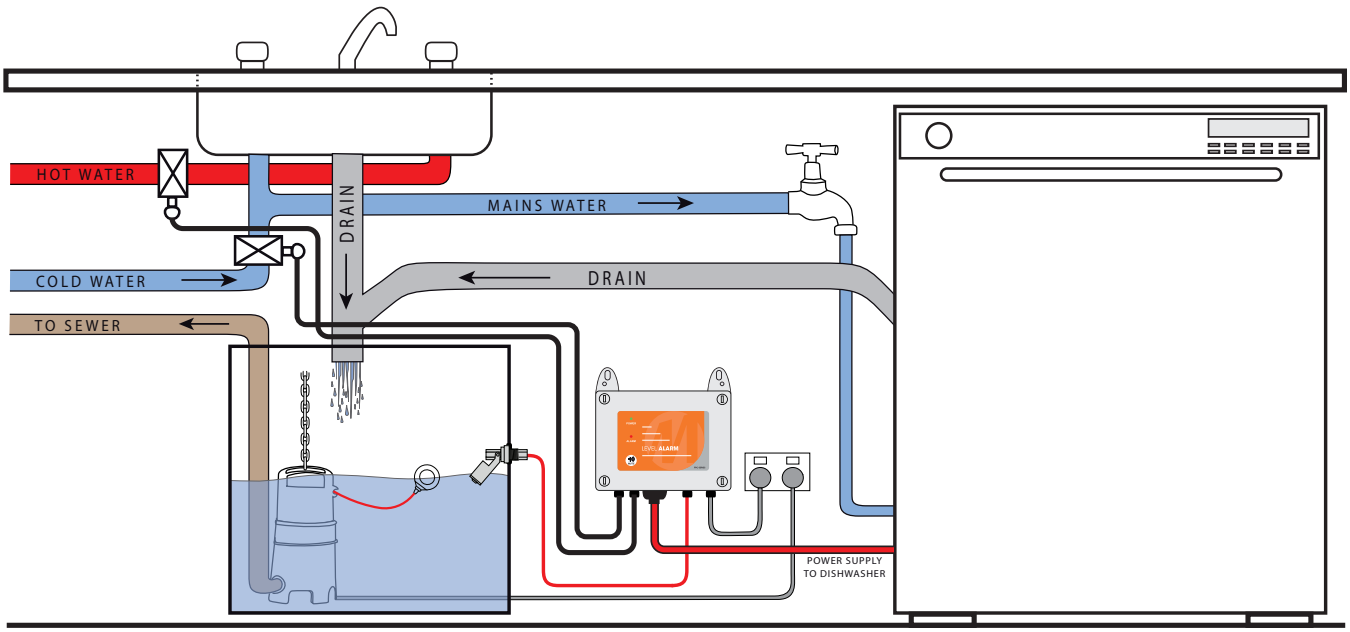

KWIKFLO PUMP STATIONS & TRADE WASTE


Pump Options

Although somewhat limited by the compact size, there are still multiple types of pumps that can be fitted to Kwikflo undersink pumpstation in order to create a package better suited for the application.



Sabre BAV-550A


The Sabre BAV-550A is a powerful pump option for 80L undersinks, with a max flow of around 310LPM and max head pressure of 10M.

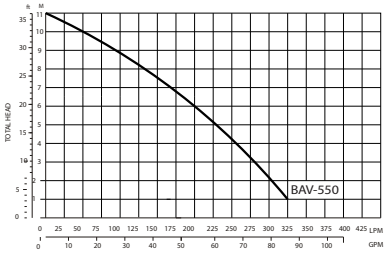



Davey D15VAGMA


The D15VAGMA is a great option for smaller undersinks including the 40L, however still has a very useful performance range, with a max head of 6M and max flow of 110LPM





Grundfos KP250-1A

The KP250-1A is of stainless steel construction and is an extremely reliable and efficient pump for undersinks. Max head 6.5M, max flow around 160LPM.



Optional Extras

High Level/Dishwasher Alarm

A finger float mounted to the tank supplies the high level signal. There are various alarm options, a simple buzzer and light, a solenoid interlock which shuts off water supply, a dishwasher interlock which switches off dishwasher power, or a combination.



Carbon Filter

All undersink units require a vent to atmosphere, not a one way valve. This filter eliminates the need to take the vent pipe out of the undersink area. It must finish higher than the unit lid.




Undersink Pumpstations

KUS80

KWIKFLO
PUMP STATIONS & TRADE WASTE

Description

Kwikflo 80 litre stainless steel undersink packaged pump station fitted with a submersible pump, internal pipework and valves. Pump station has a maximum head from all causes of 7 or 11 metres (depending on pump included) and requires venting

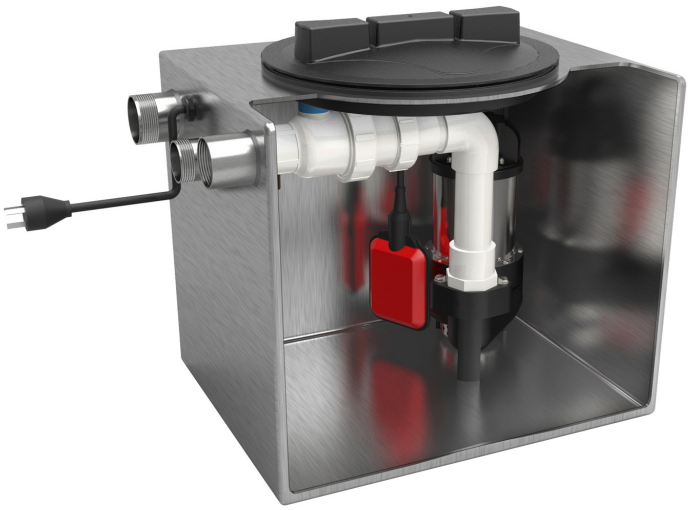

Features & Benefits

CONSTRUCTION
Stainless steel tank

All connections at end of tank to be installed by plumber

All in-tank fittings incorporated in the undersink pump stations as follows:

- PVC ball and non-return valves barrel unions.
- PVC interconnecting paperwork

LIQUID HANDLED
Trade waste, Effluent & Stormwater, Sink waste, Grey water

APPLICATIONS
Cafes & Kitchens, Hobby rooms, Dental surgeries, Laboratories


Specifications

Model No.	KUS80
Depth	400mm
Width	500mm
Height	450mm
Nominal Litres	80
Approximate Weight	33kg


Details

- 304 Stainless steel
- Heavy Duty
- Odour eliminated by vent & compressible gasket
- Vortex, high head or drainage type pump
- High level alarm option
- Vent is required


Dimensions

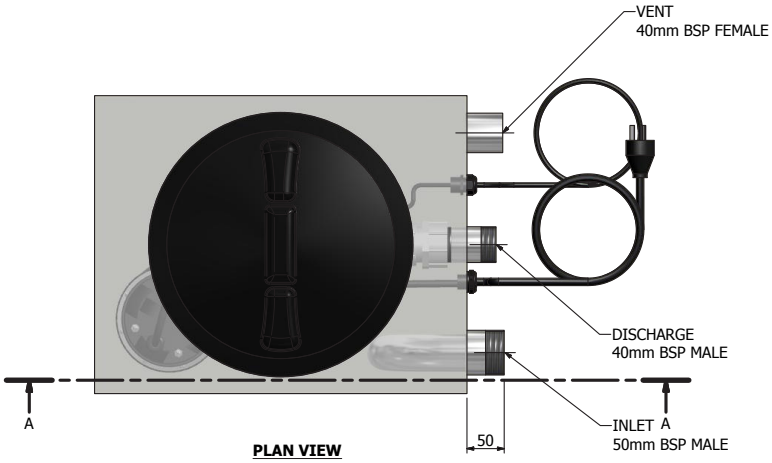

PLAN VIEW

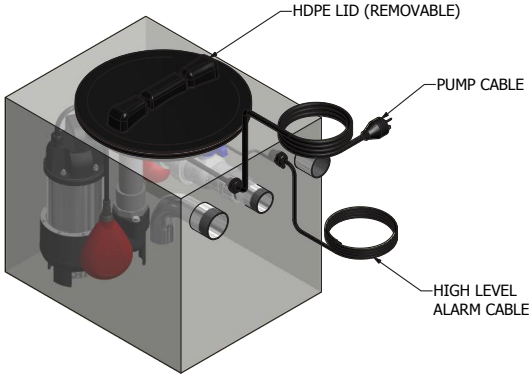


ISOMETRIC VIEW

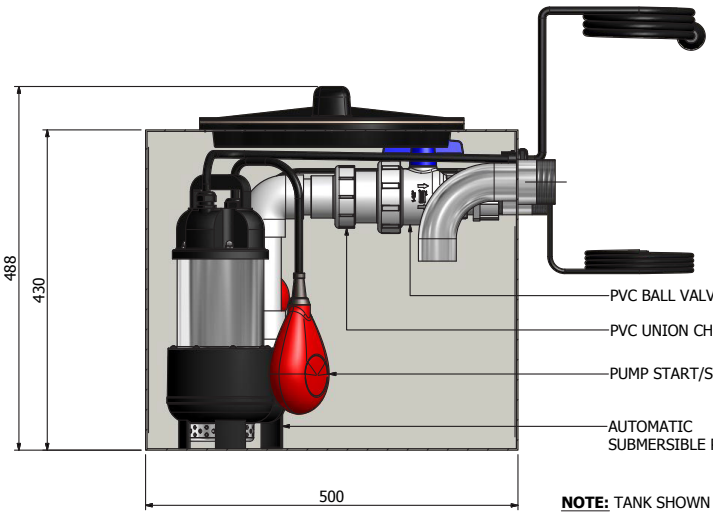

SECTION A-A

NOTE: TANK SHOWN TRANSPARENT FOR CLARITY

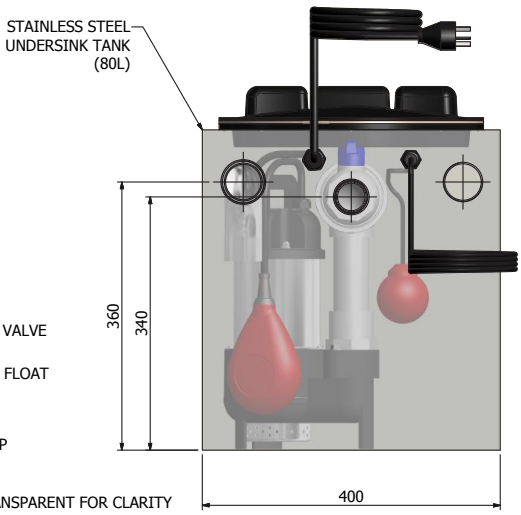

FRONT ELEVATION