
KWIKFLO PUMP STATIONS & TRADE WASTE

Kwikflo Undersink Pumpstations

Kwikflo Undersinks are an automatic system designed to handle sink and basin waste where it is not possible to achieve gravity fall to sewer. It incorporates a small electric submersible pump and is available in a variety of capacities and materials.




Sizing Guide

The below table can help with rough estimations as to sizing and model selection. Indicative only.


Tank Size	Capacity (approx.)
40L	20 People / 1 Dishwasher
80L	40 People / 2 Dishwashers

Plumbing Guide

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

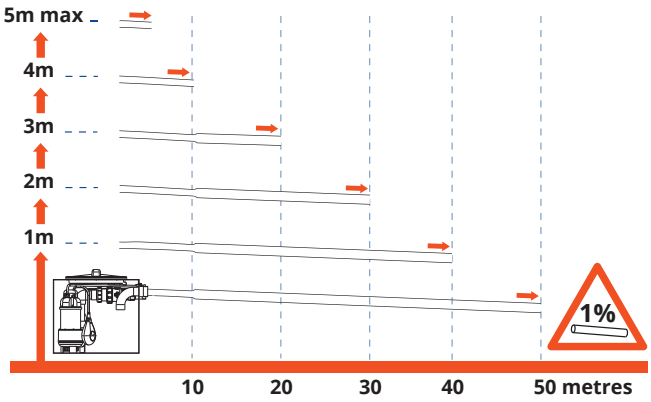

Typical Kitchen Installation

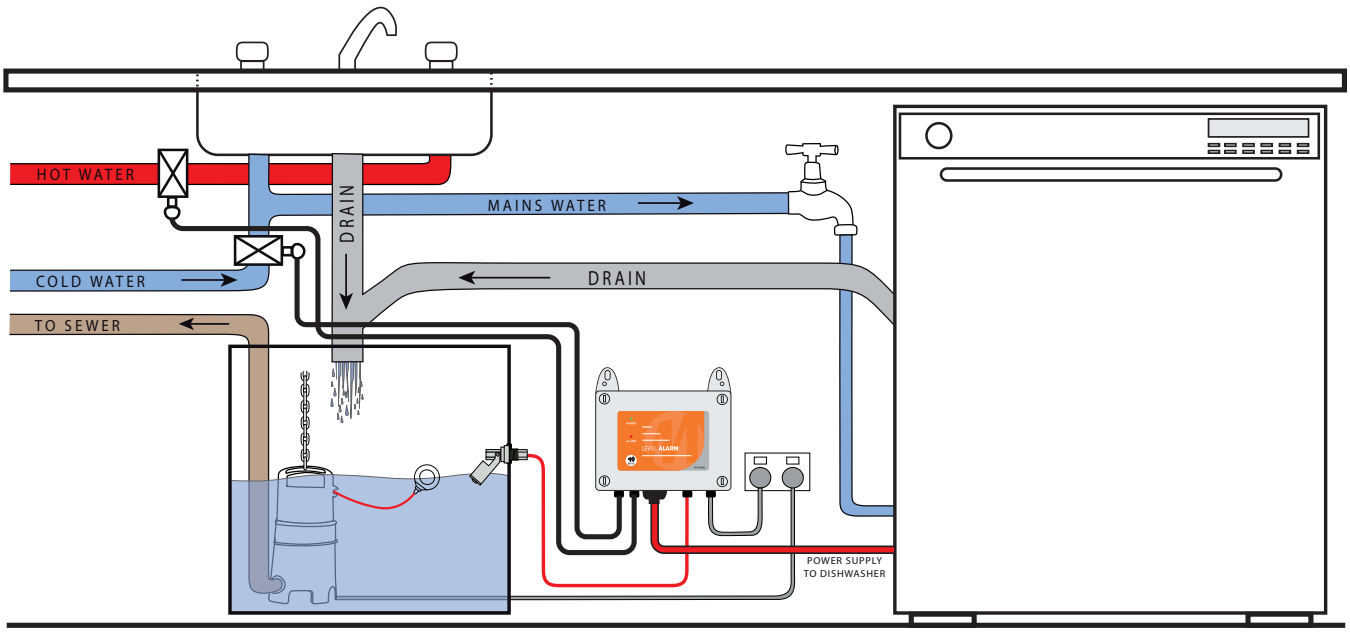

Undersink Pumpstations

KUSP40

KWIKFLO
PUMP STATIONS & TRADE WASTE

Description

Kwikflo 40 litre polyethylene undersink packaged pump station fitted with a submersible vortex pump, internal pipework and valves. Pump station has a maximum head from all causes of 7 metres and requires venting

Comes with SAR40 Pump installed



Features & Benefits

CONSTRUCTION

Polyethylene tank

All connections at end of tank to be installed by plumber

All in-tank fittings incorporated in the undersink pump stations as follows:

- PVC ball and non-return valves barrel unions
- PVC interconnecting paperwork

LIQUID HANDLED

Trade waste, Effluent & Stormwater, Sink waste, Grey water

APPLICATIONS

Cafes & Kitchens, Hobby rooms, Dental surgeries, Laboratories

Specifications


Model No.	KUSP40
Depth	330mm
Width	430mm
Height	410mm
Nominal Litres	40
Approximate Weight	16kg

Details


- Polyethylene construction
- Units can be wall hung
- Odour eliminated by vent & compressible gasket
- Light weight
- Vortex, high head or drainage type pump
- High level alarm option
- Vent is required

KWIKFLO PUMP STATIONS & TRADE WASTE


Dimensions

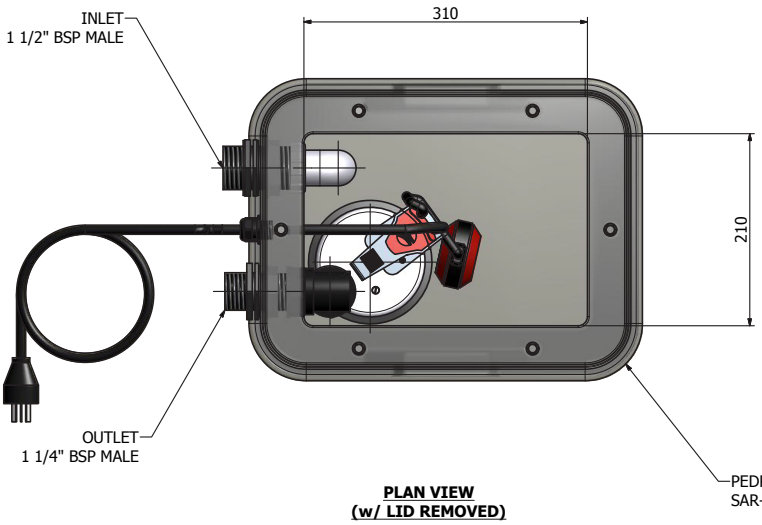


PLAN VIEW (w/ LID REMOVED)

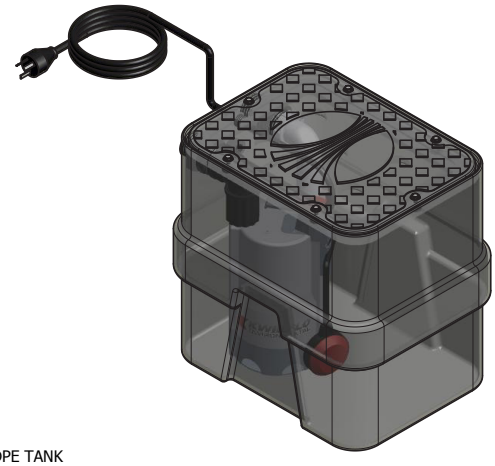

ISOMETRIC VIEW

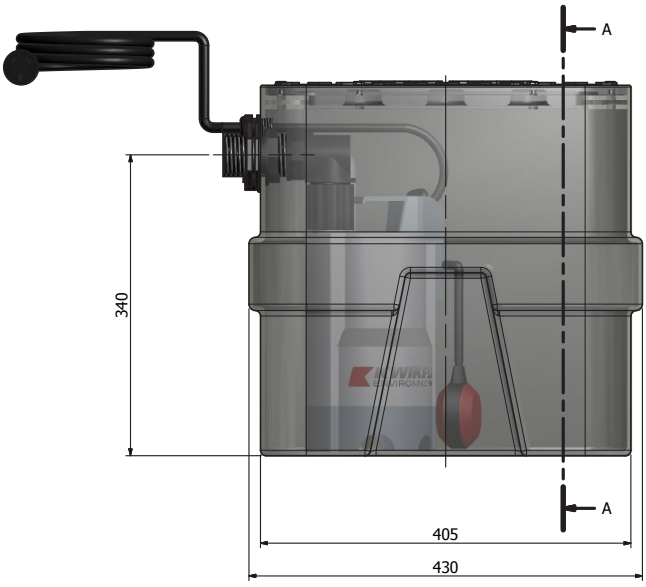

SIDE ELEVATION

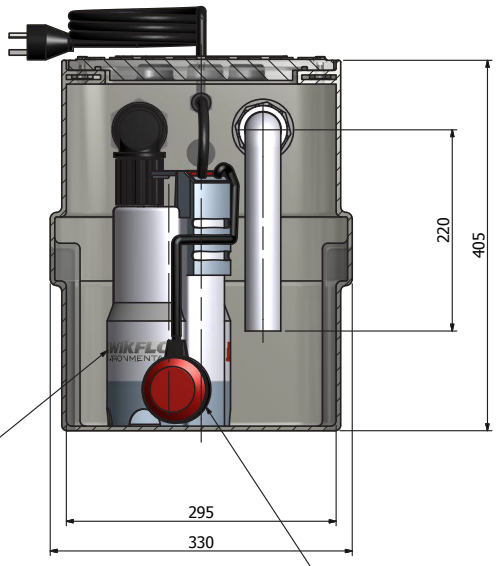

NOTE: TANK SHOWN TRANSPARENT FOR CLARITY

SECTION A-A

