
Diaphragm Pumps

KDP25

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features


- Suction lifts to 7.5m
- Rapid self priming
- Will run dry without damage
- Will operate on snore
- Will handle abrasive liquids
- Will pass solids up to 80% of port size
- Heavy Duty, compact construction
- TEFC electric motors fitted as standard
- Special electric motor enclosures as an option

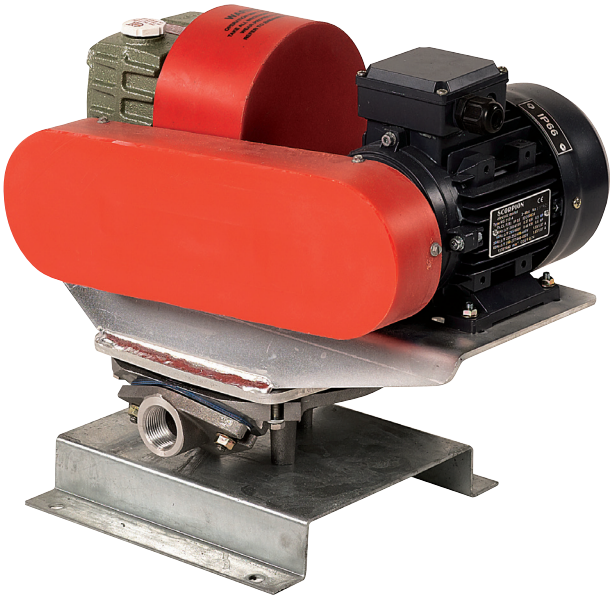

Specifications

Model No.	KDP25
Connections	25mm(1")
Nominal flow rate	16-25 l/min
Suction lift	7.5m
Discharge head	6.0m
Solid size	15mm
Motor size	0.37kW
Weight	25kg

Dimensions

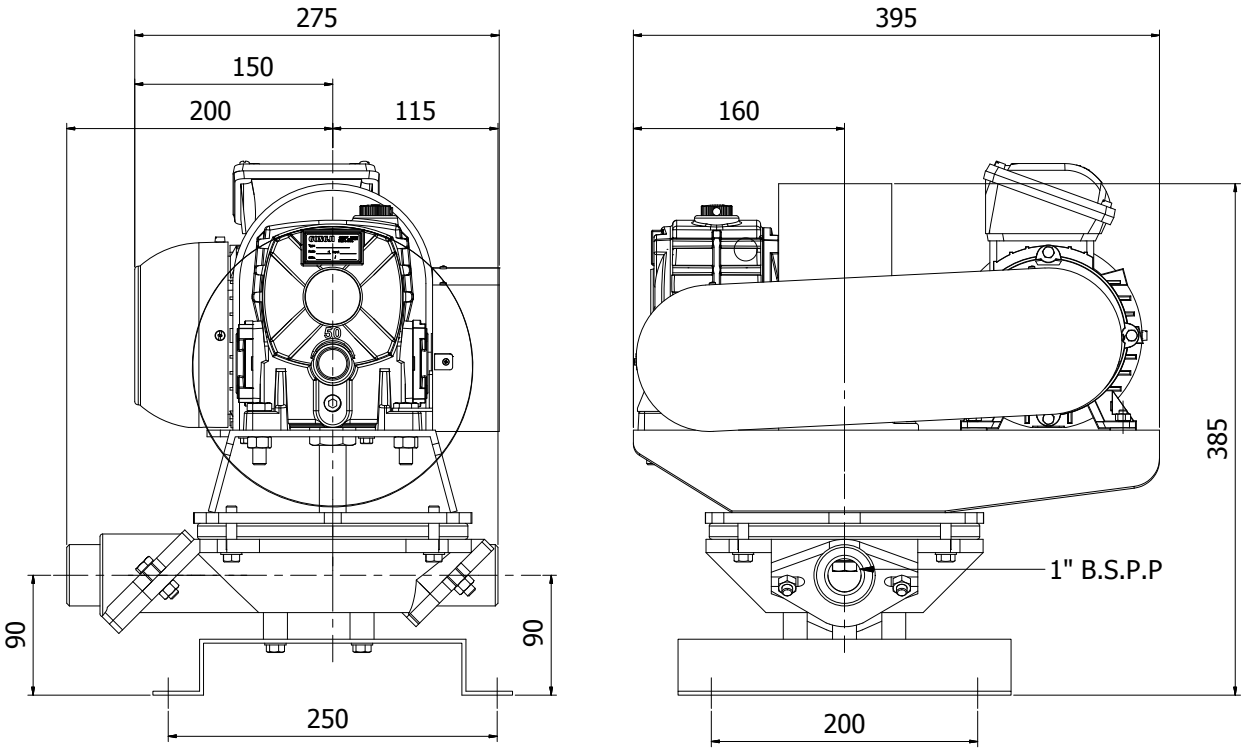


Diaphragm Pumps

KDP32

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features


- Suction lifts to 7.5m
- Rapid self priming
- Will run dry without damage
- Will operate on snore
- Will handle abrasive liquids
- Will pass solids up to 80% of port size
- Heavy Duty, compact construction
- TEFC electric motors fitted as standard
- Special electric motor enclosures as an option

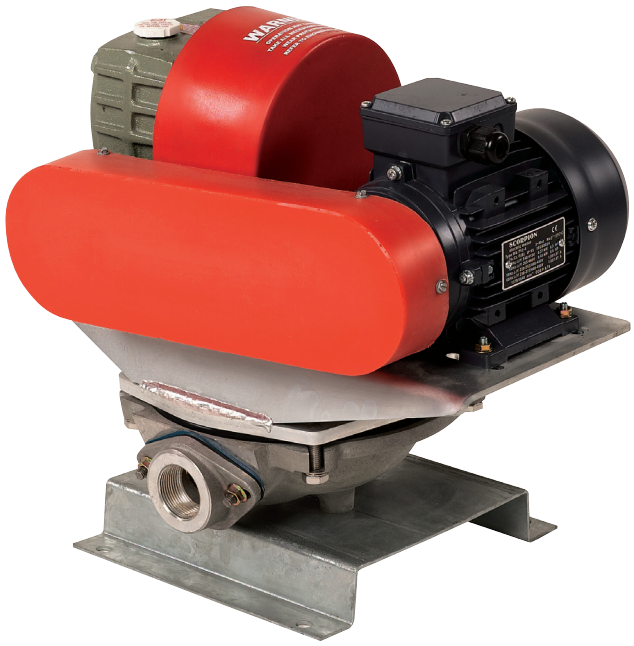


Specifications

Model No.	KDP32
Connections	32mm(1 1/4")
Nominal flow rate	33 l/min
Suction lift	7.5m
Discharge head	6.0m
Solid size	20mm
Motor size	0.37 kW
Weight	30kg

Dimensions

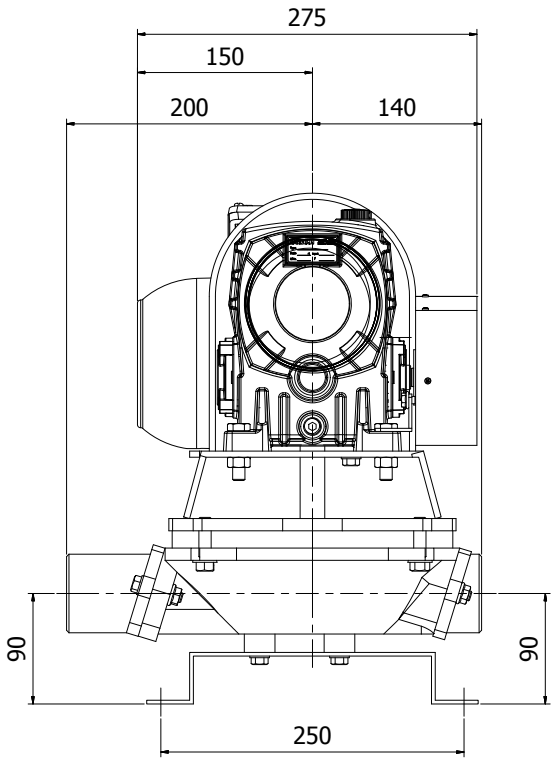

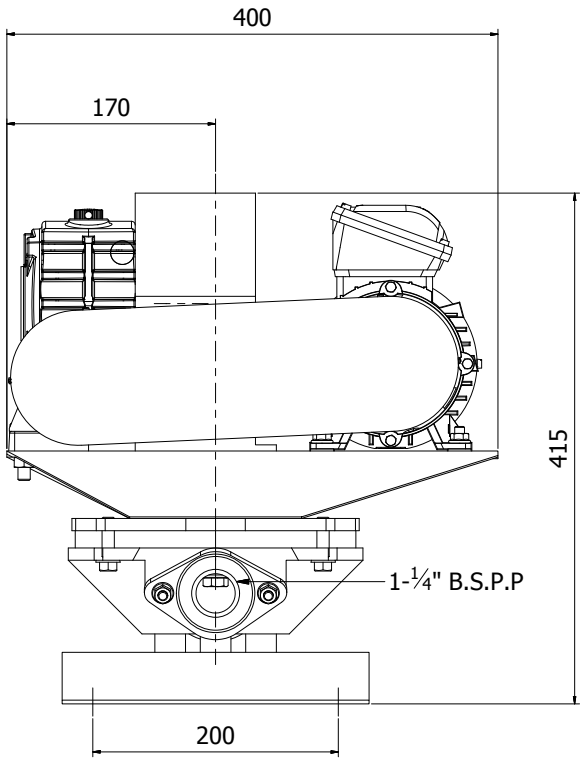


Diaphragm Pumps

KDP38

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features


- Suction lifts to 7.5m
- Rapid self priming
- Will run dry without damage
- Will operate on snore
- Will handle abrasive liquids
- Will pass solids up to 80% of port size
- Heavy Duty, compact construction
- TEFC electric motors fitted as standard
- Special electric motor enclosures as an option

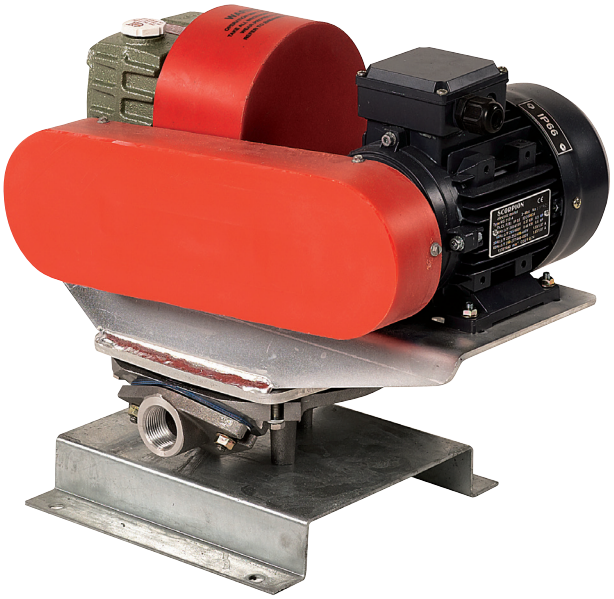


Specifications

Model No.	KDP38
Connections	38mm(1 1/2")
Nominal flow rate	50 l/min
Suction lift	7.5m
Discharge head	6.0m
Solid size	25mm
Motor size	0.75 kW
Weight	42kg

Dimensions

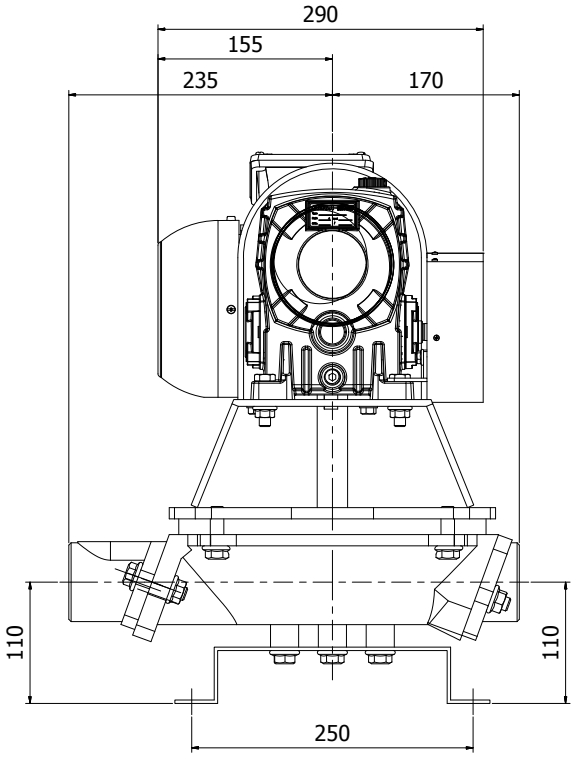

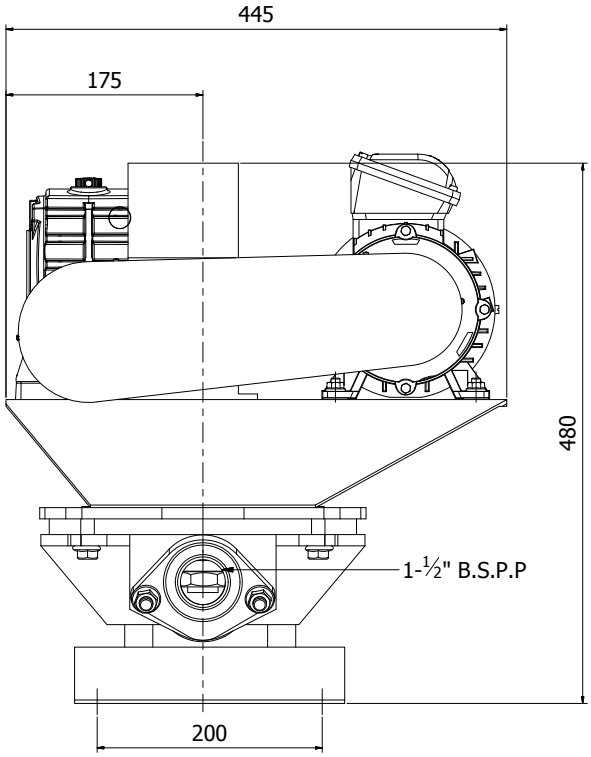

Diaphragm Pumps

KDP50

KWIKFLO PUMP STATIONS & TRADE WASTE

Features


- Suction lifts to 7.5m
- Rapid self priming
- Will run dry without damage
- Will operate on snore
- Will handle abrasive liquids
- Will pass solids up to 80% of port size
- Heavy Duty, compact construction
- TEFC electric motors fitted as standard
- Special electric motor enclosures as an option




Specifications


Model No.	KDP50
Connections	50mm(2”)
Nominal flow rate	100 l/min
Suction lift	7.5m
Discharge head	6.0m
Solid size	35mm
Motor size	1.1 kW
Weight	55kg


Dimensions

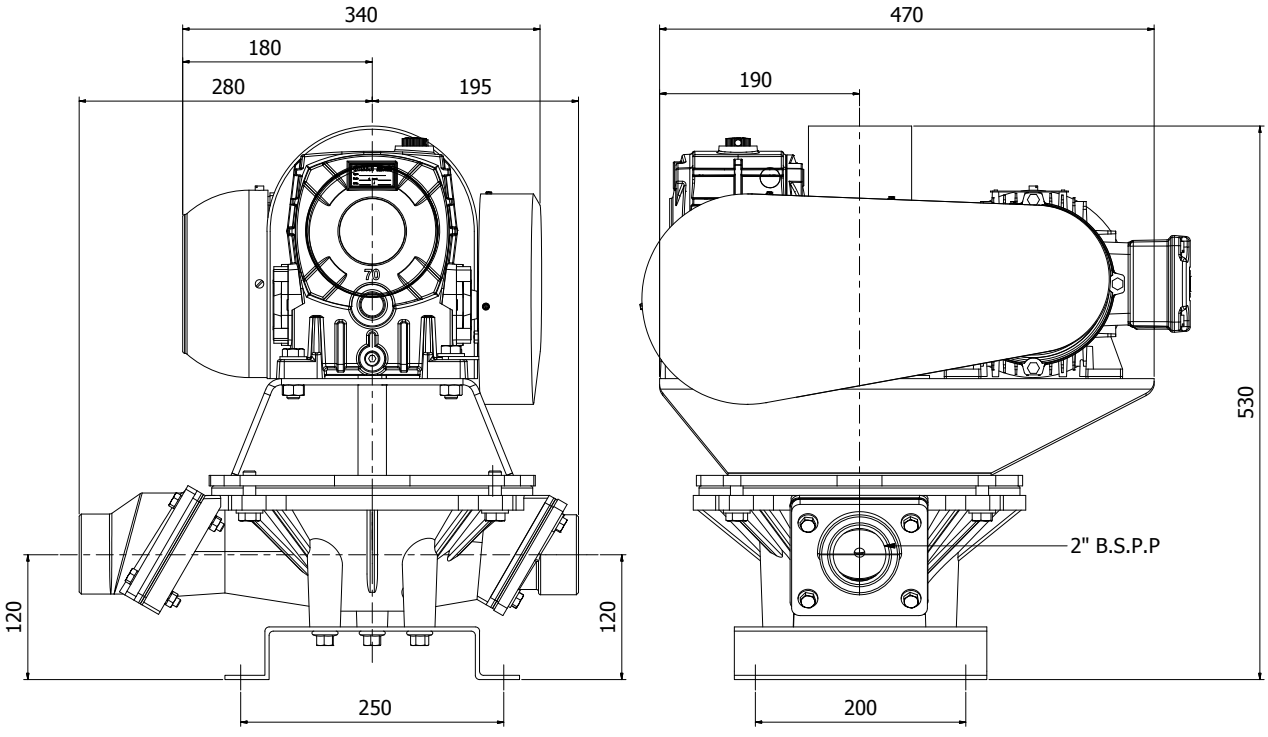



KWIKFLO
PUMP STATIONS & TRADE WASTE

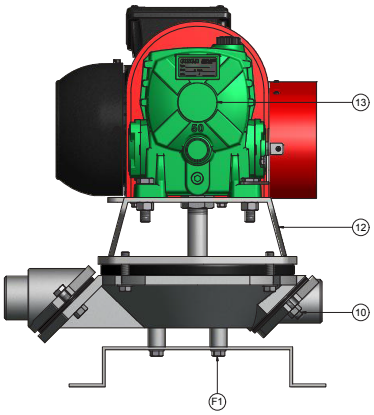


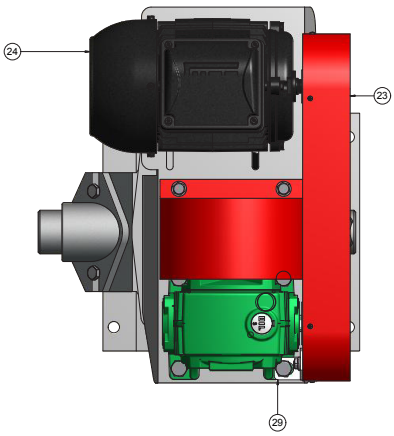


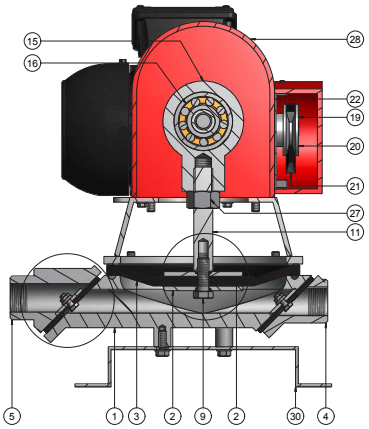

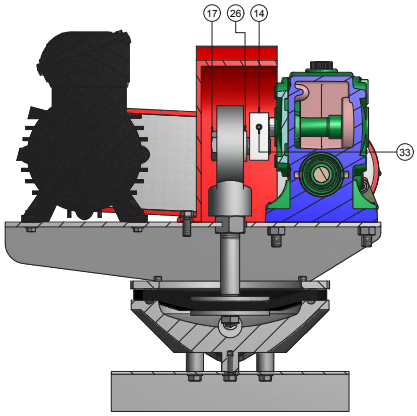







NO.	DESCRIPTION
1	Aluminium Bowl
2	Diaphragm plate
3	Nitrile diaphragm
4	Aluminium suction port
5	Aluminium discharge port
6	Stainless steel valve seat
6G	Nitrile valve seat gasket
7	Nitrile flap valve
8	Weight Set
9	Diaphragm plate bolt
11	Connecting rod
12	Drive support housing
13	Worm gear speed reducer - Ratio 30:1
14	Eccentric block
15	Eccentric bearing housing
16	Bearing - 6305
17	Eccentric bolt & washer
18	Circlip
19	Gearbox pulley
20	Motor pulley
21	V-Belt
22	Pulley guard backplate - SS 304
23	Pulley guard - Plastic
24	Electric motor
25	Nitrile O-Ring
26	Eccentric bolt spacer
27	Connecting rod nut
28	Eccentric guard - Plastic
29	Pulley guard backplate support bracket
30	Baseplate - Mild steel - Galvanised
31	Flanged hex nut
32	Hex head bolt
33	Grub screw
34	Washer

Service parts



2 x Flap Valve Gaskets



2 x Diaphragm plate O-rings or gaskets



1 x Vee Belt



1 x Diaphragm



2 x Flap Valve Assemblies