




USB

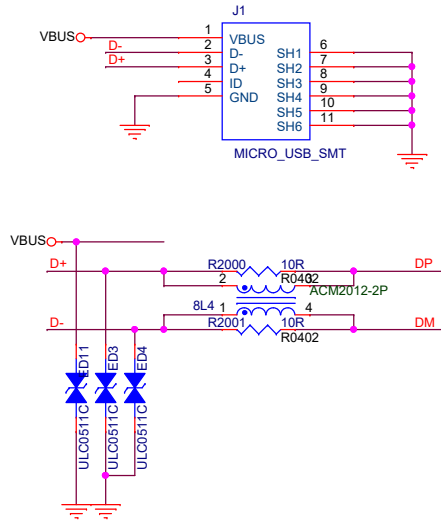


UART

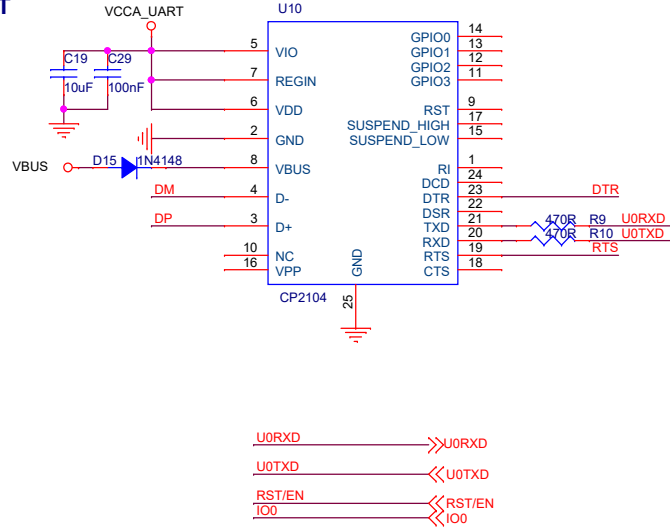


LDO

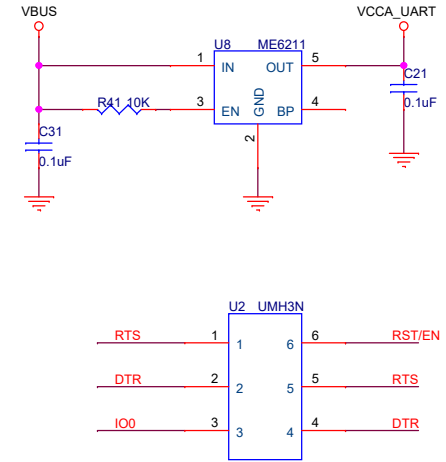


5V-3.3V

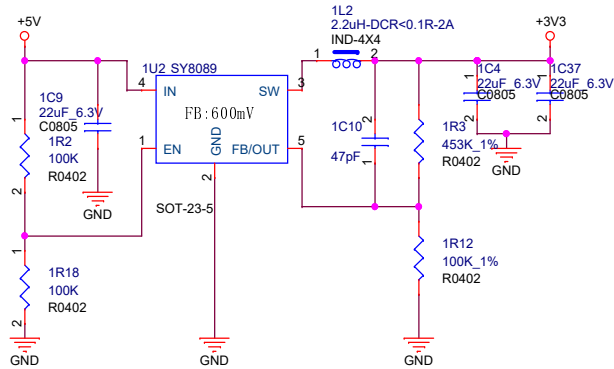

Battery

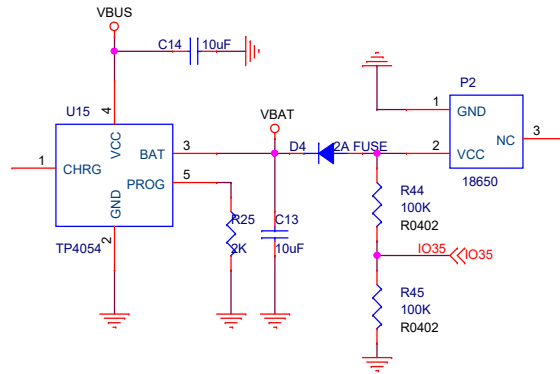


VBUS/VBAT-VIN

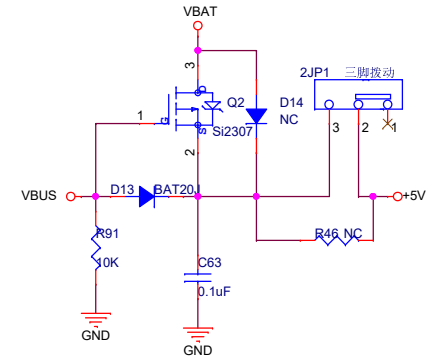


| | | |
|---------|--------------------------|--------------|
| Title | | |
| T18_1.4 | | |
| Size | Document Number | Rev |
| B | POWER | V1.4 |
| Date: | Thursday, March 19, 2020 | Sheet 1 of 2 |

Core


ESP32 Module:with 1.8V Flash & SRAM
The operating voltage for signals marked in blue is 1.8V.

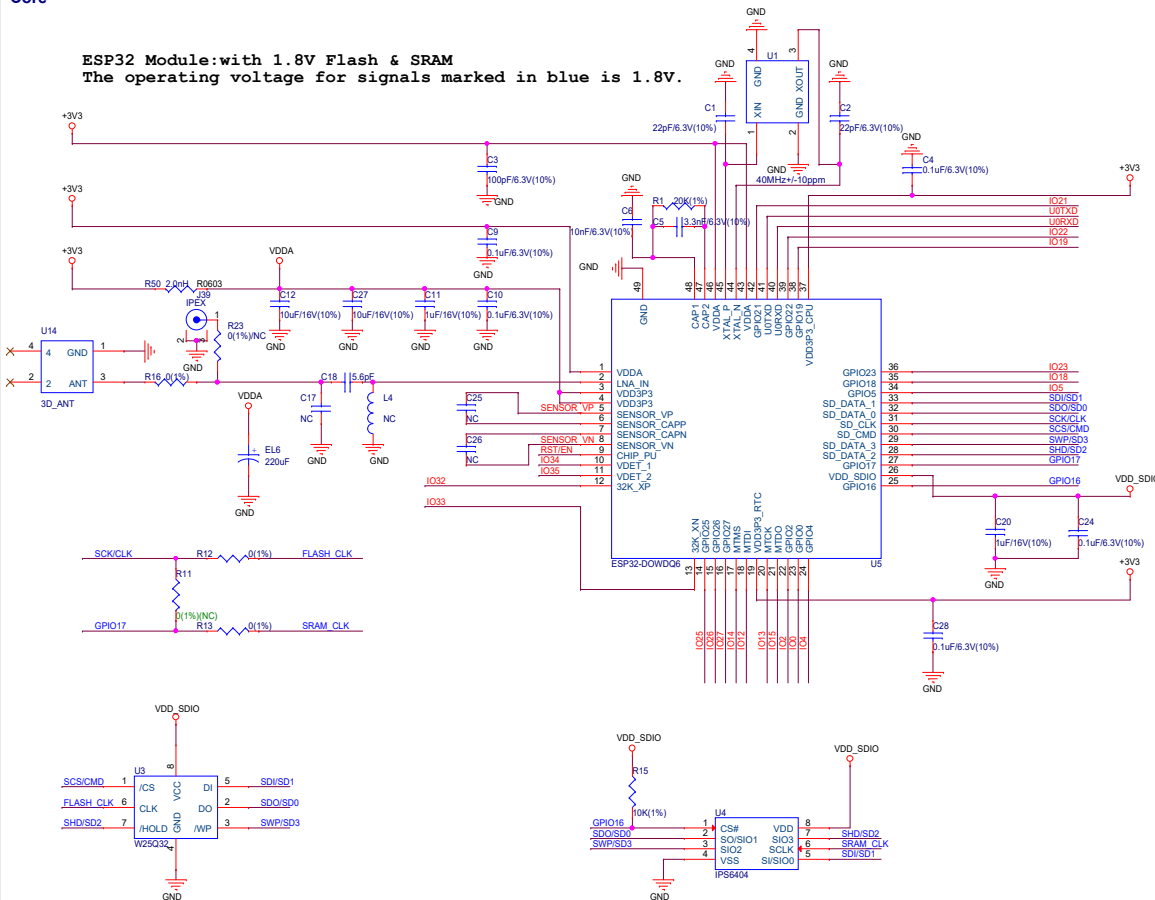


Connector

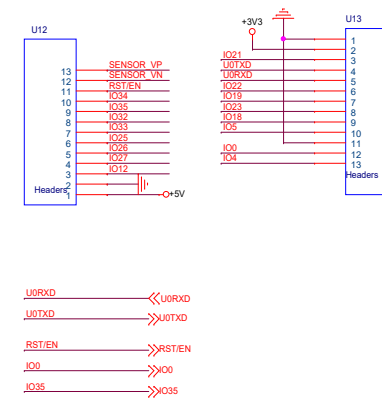


KEY

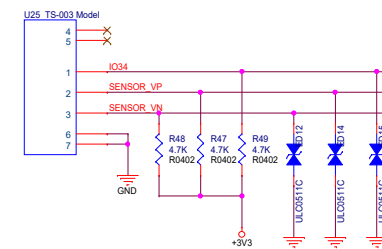


RST



HOLE



LED



SD CARD

