

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2017.DOI

WSNNet: Stacked Bidirectional LSTM with Residual Attention for Indoor Localization of Wireless Sensor Network

HYUNGTAELIM¹, (Student Member, IEEE), CHANGGYU PARK¹, (Student Member, IEEE), , AND HYUN MYUNG.¹, (Senior Member, IEEE)

¹Urban Robotics Laboratory, Korea Advanced Institute of Science and Technology, Daejeon 34141, South Korea.

Corresponding author: Hyun Myung (hmyung@kaist.ac.kr).

This material is based upon work supported by the Ministry of Trade, Industry & Energy(MOTIE, Korea) under Industrial Technology Innovation Program. No.10067202, 'Development of Disaster Response Robot System for Lifesaving and Supporting Fire Fighters at Complex Disaster Environment'.

ABSTRACT

As verified experimentally, this new proposal represents a significant improvement in accuracy, computation time, and robustness against outliers.

INDEX TERMS Enter key words or phrases in alphabetical order, separated by commas. For a list of suggested keywords, send a blank e-mail to keywords@ieee.org or visit http://www.ieee.org/organizations/pubs/ani_prod/keyword98.txt

I. INTRODUCTION

SIMULTANEOUS Localization and Mapping(SLAM) is widely used in autonomous vehicles, drones, intelligence field robots, and mobile phone applications. Thus, according to the smart city development plan, several technologies are required in such a way that the demand and the necessity of SLAM increase together. Various kinds of sensors are utilized to SLAM, such as GPS, LiDAR, ultrasonic-based sensor, camera and distance sensor. Especially, trilateration algorithm has been widely incorporated into robotics fields, especially utilized in the indoor environment to estimate the position of an object by distance measurements obtained from range sensors such as UWB, ultrasonic, laser-based beacon sensors [1]–[3] due to the convenience of trilateration that estimates the position of a receiver of range sensors if one only knows range measurement. For that reasons, range-only Simultaneous Localization and Mapping(RO-SLAM) methods are utilized popularly, which not only estimate the position of the receiver of range sensors, but also localize the position of range sensors regarded as features on a map, and studies have been conducted continuously in terms of probability-based approach [4]–[7].

In the meantime, as deep learning age has come [8], various kinds of deep neural architectures have been proposed for many tasks related to robotics field, such as detection

[9]–[11], navigation [12], [13], pose estimation [14], and so on. Especially, recurrent neural networks (RNNs), originated from Natural Language Process(NLP) area [15], have been shown to achieve better performance in case of dealing with time variant information, thereby RNNs are widely utilized such as not only speech recognition, but also pose estimation and localization [14], [16]–[19].

In this paper, we propose a deep learning-based SLAM method by multimodal stacked bidirectional Long Short-Term Memory(multimodal stacked Bi-LSTM) for more accurate localization of the robot. Using deep learning, our structure directly learns the end-to-end mapping between range measurements and robot position. This operation non-linearly maps the relationship not only considering the long-range dependence of sequential distance data by the LSTM, but also using the correlation of the backward information and the forward information of the sequence of each time step by virtue of its bidirectional architecture. Existing RO SLAM needs calibration before filtering, and then, range measurement undergoes outlier rejection, prediction and correction processes are needed. Furthermore, it uses low dimensional data to perform localization, there is a disadvantage that estimation is difficult even if the value deviates slightly from the model. Therefore, we solve this complex algorithm with end-to-end based deep learning. This system overview is

shown in the figure below.

Various kinds of sensors have been utilized to localize an object using range measurement sensors, such as GPS, ultrasonic-based sensors, ultra-wideband (UWB) sensors. However, almost distance measured by range measurement sensors are based on Time of Flight (TOF), Time of Arrival (TOA) [20], or Time of Differential Arrival (TDOA) in such a way as to consist of the 1-D data composed by the distance between landmarks and robot. This is the main issue dealing with range measurements, called *rank-deficiency* problems. Besides, only magnitudes could represent the range measurement, deflection, reflection, and refraction and so on. Because range measurements consist of

In contrast to other SLAM, RO SLAM suffers from “rank deficiency problem”, which means range measurement is 1D data so it is too deficient to describe position or orientation as you guys know, it only has magnitude. As this figure shows, in 3D, possibility of location of sensor is distributed over sphere / since range measurement doesn’t contain direction information! To solve this problem, various types of RO SLAM have been studied. RO SLAM is generally divided into two approaches; PF RO SLAM and KF based RO SLAM

We also provide statistical analysis from simulations demonstrating that our new approach can cope with highly noisy sensors and reduces in one order of magnitude the average errors of the method proposed

The rest of the paper is organized as follows. Section 2 describes relevant localization methods. Section 3 introduces principles of neural networks. The experiments by which these methods will be compared are given in Section 4. The results will be discussed in Section 5, and concluding comments will be made in Section 6

fixed or calculated during initialization stage [7]. For range-based methods, the distance information can be obtained by analyzing time of arrival (TOA), time difference of arrival (TDOA), angle of arrival (AOA), or received signal strength indicators (RSSI) [8]. TOA algorithm calculates the distance on the basis of known transmission time and signal propagation speed. It requires high-resolution clocks to be installed at sensor nodes. In case of AOA algorithm, the sensor node needs several narrow beam receivers or an antenna array to determine the direction of the received signal. TDOA uses two transmission signals of different propagation speeds. Therefore, it requires two different transmitters and receivers on each node. The above range-based localization techniques have little practical use in WSNs due to the necessity of additional hardware, which increases cost, size, and energy consumption of sensor nodes. RSSI algorithms estimate the node-to-node distances by using a signal propagation model. However, for real world

reference nodes. Currently, there is a considerable research interest in developing fingerprint localization methods based on artificial neural networks (ANNs) [10]. An important advantage of this approach is that the ANN enables accurate recognition of node location in case of noisy RSSI measurements. When using ANNs, the detailed information about

indoor environment and locations of the reference nodes is not necessary. ANN interpolates the data collected in the fingerprint database to approximate a mapping between the multidimensional fingerprints space and the coordinates of nodes. In training phase, the collected RSSI vectors are used to tune weights of connections between neurons in the ANN. Although training can be time-consuming, the localization process is much faster than analytical estimation of the node location. In this paper a method is proposed that improves localization accuracy of the ANN-based fingerprinting. According to the introduced method, the entire localization area is divided into regions by clustering the fingerprint database. A separate ANN is trained for each region by using only those fingerprints that belong to this region (cluster). During clustering, a prototype RSSI vector is determined for each region. When localization process starts, those prototypes are selected that are most similar to the vector of current RSSI measurements. The ANNs that correspond to the selected prototypes are used to estimate the node coordinates. Final estimation of the location is obtained by fusion of the coordinates delivered by ANNs. Further improvement of the localization accuracy as well as speedup of learning process was achieved by employing fully connected neural networks

We propose a novel range-free localization algorithm for wireless sensor networks that is robust against the anisotropic signal attenuation

+++++

In the past few years, some researchers have conducted the studies for wireless sensor networks to improve the performance of their algorithms by reducing computational complexity or localizing a mobile node more precisely. Also, many machine learning techniques have been introduced: one author utilized support vector machine (SVM) for localization, [?], [?], [?], [?], other author developed method support vector regression (SVR) for localization [?], [?]. In [?], authors suggested two SVMs for localization, called LSVMs, one LSVM infers x-dimension and the other LSVM infers y-dimension. To employ LSVMs, they divide the field into $M-l$ x-classes and $M-l$ y-classes, like grid, and this deployment has had an impact on succeeding studies [?], [?], [?]. Samadian *et al.* [?] introduced probabilistic support vector machine for localization and they showed that probabilistic vector machine has better performance than LSVM. In terms of SVR, Lee *et al.* suggested various types of SVR for localization [?], [?]

Especially, to localize nodes of the range measurement sensors on the indoor space while covering range measurements’ uncertainties using neural networks, several fascinating works have been studied. Regarding previous proposals, Chenna *et al.* first shows the suitability that Kalman filter could be replaced with the RNN when estimating states and tracking nodes [21]. However, they did not provide numerical analysis, so Shareef *et al.* did [22] and conducted their experiment in the real-world. They concluded Multi-Layer Perceptron (MLP) may be the best option among the suggested Kalman filter models and RNN.

Similarly, many researchers also have achieved considerable improvement to localize position of mobile node by exploiting MLP [?], [?], [23]–[25] in WSN fields. Rahman *et al.* [23] considered the neural networks for mapping between RSS and corresponding position of sensor nodes and let neural networks be trained by the train data gathered by the sensor nodes that are equally spaced over x-axis and y-axis. In [24], Singh *et al.* compared that performance of Multilayer Back propagation Network Model (MLBPN) and Radial Basis Function Network Model (RBFN) and the authors show that RBFN performs better than MLBPN when the number of the sensor nodes is larger than 220 nodes in given arbitrarily spread sensor nodes test data set. Abdelhadi *et al.* [25] presented two artificial intelligence techniques: Sugeno-type fuzzy system and neural networks system. In addition, the authors conducted experiment on three-dimensional (3D) space in such a way as verified the feasibility of localization by utilizing neural networks in 3D space. Kumar *et al.* [?] also introduced the neural networks and evaluated five different training techniques, e.g., Levenberg-Marquardt (LM), Bayesian Regularization (BR), Resilient Back-propagation (RP), Scaled Conjugate Gradient (SCG) and Gradient Descent (GD), to find optimal way to train neural networks with the best accuracy. Recently, [?] have proposed the neural networks with novel training technique, called Particle Swarm Optimization (PSO) and prove their network, called LPSONN, has better localization accuracy than previous machine learning method, soft computing method, and previously proposed network.

The contributions of this paper can be summarized as follows:

The paper is divided into five sections. Besides this introductory section, the section II develops the VLC system model deployed in the AoA and RSS estimators which are described in subsections II-C and II-D respectively. In Section III, the 3-D hybrid estimator obtained is applied to the SO-OFDM multiplexing scheme with DCO-OFDM. In Section IV numerical simulation results are considered aiming at corroborating the quality of the 3-D location estimations for the proposed scheme. Finally, in Section V the conclusions are offered.

However, there are some points that could have been better. First of all, in some cases, their networks were trained by range measurement data corresponding position of mobile node in simulation environment [?], [?], [22]–[24]. Because the simulation situation is almost ideal in the point that the multipath caused by reflection and refraction does not occur. In other words, the data generated in the simulation environment has less noise than that of real-world necessarily. These factors make the sensor values more highly unstable in turn have a bad influence on accuracy of localization directly. In case of virtual environment, even though the authors artificially design the non line of sight (NLOS) situation or mix the noise into the measured value and shows quite accurate localization results, it is hard to say that their networks also work well on real world situation. Therefore, to test

on whether it is possible for neural networks to estimate position with covering all disturbance, the experiment should be conducted on real-world.

Secondly, there's an overfitting issue. one authors let their neural networks architecture by grid-map train data. Grid-map train data indicates that sensor data are gathered by the mobile nodes that are evenly spaced. Let n be the number of mobile nodes and m be the number of the anchor nodes, data set are represented as follows:

$$\{(L_{11}, L_{12}, \dots, L_{1m}, P_1), \dots, (L_{n1}, L_{n2}, \dots, L_{nm}, P_n)\} \quad (1)$$

where L_{ij} denotes the distance between i^{th} mobile node and j^{th} anchor node, P_i denotes the position of mobile node, which consist of 2D (x and y), or 3D (x, y , and z). In other words, data consist of set of distance data corresponding and fixed position of mobile nodes. Consequently, neural network could be optimized to be able to localize the mobile node when take distance set as input. However, it has the possibility of overfitting because their ground truth is restricted. That is to say, their finite ground truth indicates where the sensors are placed at the equal distance interval so that neural networks may recognize the only locations included in the grid are correct. As a result, even though position of mobile node to be tested is a short distance away, neural networks may have a tendency to outputs similar position that are included in train data when takes set of distance $(L_{i1}, L_{i2}, \dots, L_{im})$. Therefore their grid map train impedes the optimization of neural networks to cover all over the region.

If the neural networks is trained by that grid-map data, then neural networks may P_i are finite their weights by the train data in

Finally, It must be noted that the RSSI values obtained are highly unstable and turn to vary under environmental noise and mobility of sensor nodes. A neural network offers the advantage that prior knowledge of the environment and noise distribution is not necessary. Moreover, higher accuracies are achieved by neural networks compared to other techniques such as the Kalman filter [3]. The trade-off between the accuracy and memory requirements of the MLP neural network is the best when compared with other types of neural networks, thus it has been chosen to be used in this research.

++++ Unlike range-based algorithms, range-free methods only utilize the connectivity information for the positioning purpose. These approaches do not need non-anchors to have specific hardware for measuring distances. The researchers consider these techniques as a simple and cost-effective solution than range-based algorithms for the localization problem. The non-anchor nodes obtain the connectivity information of hop count distances from anchors and estimate their positions by this information. In recent years some research works exploit machine learning methods such as neural networks to improve the performance of sensor networks on given tasks, for instance forest fire detection [10], air quality monitoring [10], intelligent lighting control in the smart building [10], localization [11] and providing full

Localization method	Dimension	Type of input data	Train data	Test data mobility	Implementation environment
MLP [22]	2D	RSSI	Grid	Dynamic nodes ✓	Real-world ✓
MLP [23]	2D	RSS	Grid	Static nodes	Simulation
MLPNN [?]	2D	Hop count	Grid	Static nodes	Simulation
MLBPN [24]	2D	TDOA	Grid	Static nodes	Simulation
MLP [25]	3D ✓	Distance	Spread	Static nodes	Real-world ✓
Clustering-based FCNNs [?]	2D	RSSI	Spread	Static nodes	Real-world ✓
MLP [?]	2D	RSSI	Grid	Static nodes	Real-world ✓
LPSONN [?]	2D	Hop count	PSO ✓	Static nodes	Simulation
Ours	3D ✓	TOF	PSO on the mobile robot ✓	Dynamic nodes ✓	Real-world ✓

coverage of the area using dynamic deployment [12]. The machine learning methods can be applied to both range-based and range-free localization algorithms. In range-free algorithms, the connectivity information is utilized for training of neural networks. After that, obtained neural network model is sent to the network for localization of non-anchor nodes. In this paper, we present a range-free localization method that uses neural networks for positioning of non-anchor nodes. The method uses hop count distances between anchor nodes for the training of the neural network. Particle swarm optimization (PSO) algorithm is used to optimize the count of neurons in the hidden layers of the neural network. An objective function is defined to optimize the neural network based on the localization accuracy and storage space that is needed for storing the weights of the neurons in the hidden layers. The contribution of this paper is that we use PSO to optimize the neural network based on the storage cost and localization accuracy, simultaneously. Furthermore, in this objective function, we consider both of average error of estimated positions of all beacons and the maximum error of estimated positions among beacons. The optimized neural network model is sent to the network and is used for localizing the non-anchor nodes.

Note that their In case of [22]. They let MLP learn the relationships between range measurement and position of mobile node, yet MLP could not learn sequential modeling. MLP just learn the relationship like generating finger print map.

In traditionally connected ANNs, such as the MLP or RBF, neurons are organized in layers and connections are introduced from one layer to the next layer. The FCNNs have additional connections across layers In [?] it was demonstrated that when comparing FCNNs with traditionally connected ANNs the latter ones require about twice as many neurons to perform a similar task. With connections across layers in FCNNs,

RSS is the actual signal strength received at the receiver and the unit of measurement can be in dBm, dB, milli Watt, Watt. So RSS will always have a unit.

In this multihop connectivity-based localization algorithm, the distance between the two nodes is calculated in terms of the shortest path between them, which is expressed in hop-counts. The beacon nodes send their locations to ordinary sensors by sending messages that are propagated hop by hop

Incidentally, There are many variations of LSTM architecture. As studies of deep learning are getting popular,

various modified architectures of LSTM have been proposed for many tasks in a wide area of science and engineering. Because LSTM is powerful when dealing with sequential data and inferring output by using previous inputs, LSTM is utilized to estimate pose by being attached to the end part of deep learning architecture [17]–[19] as a stacked form of LSTM. In addition, LSTM takes many various data as input; LSTM is exploited for sequential modeling using LiDAR scan data [16], images [14], [17], IMU [26], a fusion of IMU and images [27]. Since existing RO-SLAM performs localization using low-dimensional data, it is difficult to estimate even if the value deviates slightly from the model. In addition, LSTM has the advantage of being able to solve long-term dependence problem of traditional RNN, and it is possible to model it by non-linear mapping through analyzing the current situation without modeling data characteristics separately. Therefore, we propose RO SLAM technology using deep learning based SLAM which applies the advantages of LSTM and deep learning to solve the disadvantages of RO SLAM.

First, In case of particle filter based RO SLAM, it is more robust than kalman filter based approach, As figure illustrated, you can observe how the Kalman filter based approach performs poorly / when the uncertainty in the beacon position becomes excessively large. And In PF filter based RO SLAM, they exploit Rao-Blackwellization. Rao-blackwellization is a mathematical method. By dividing one hidden states into two variable, it proves that variance can be reduced.

So they utilize rao-blackwellized particle filter, called RBPF, so many authors separate all states / into states of landmarks and state of robot. But in many cases, they just consider almost annular ambiguity or projected spherical ambiguity, not spherical ambiguity!.

On the other hand, kalman filter based approach is steadily studied, and they make efforts to reduce the number of hidden state variables. In case of 3D RO SLAM, there are two angles to be estimated, one is the azimuth angle that indicates angle on horizontal plane, and the other is elevation angle which indicates amount of elevation literally. On state of the art paper about 3D RO SLAM based on EKF, they dramatically reduce the number of hidden states by expressing the hypothesis as multiplication of probability about azimuth angle and elevation angle as this figure shown.

Besides, not only for the indoor environment, also on the underwater environment, Olson *et al.* suggest a method for localize a autonomous underwater vehicle(AUV) using

extended Kalman Filter(EKF) [28].

Especially, deep learning-based approaches are also implemented to reduce noise of the sensor.

First, it's very noisy, so it can occur errors easily. Second, the measurement is very ambiguous because each measurement is defined as the probability density of the sensor's potential position. The last problem is that the landmark location estimations may converge to multi-modal densities. Especially, trilateration algorithm has been widely incorporated into robotics fields, especially utilized in the indoor environment to estimate the position of an object by distance measurements obtained from range sensors such as UWB, ultrasonic, laser-based beacon sensors [1]–[3] due to the convenience of trilateration that estimates the position of a receiver of range sensors if one only knows range measurement. For that reasons, range-only Simultaneous Localization and Mapping(RO-SLAM) methods are utilized popularly, which not only estimate the position of the receiver of range sensors, but also localize the position of range sensors regarded as features on a map, and studies have been conducted continuously in terms of probability-based approach [4]–[7].

In robotics fields, Blanco SLAM is a technique for building the map information while localizing the position of the robot while moving. Localization of the SLAM predicts the current position of the robot using the landmark measured by the sensor, and mapping locates the terrain object based on the pose of the robot. Research on this technology has been actively carried out, and researches and techniques have been summarized. In 2006, the *ad hoc* sensor network consisting of range detection beacon was applied to SLAM technology for various ranges. This technology integrates node-to-node measurements to reduce drift and expedite node-map convergence [29]. In 2008, the technique to consistently combine the observation information considering the uncertainty was studied through comparing the experimental data with the actual robot and simulation using Ultra Wide-Band (UWB) devices and Rao-Balckwellized Particle Filter (RBPF) [4]. In 2012, a simple and efficient algorithm for position recognition with high accuracy and low computational complexity was researched with ultrasonic sensors [30]. In recent years, 3-dimensional-based SLAM has also been under active research and development. In 2013, a localization mapping approach of a wireless sensor network (WSN) node was studied through a centralized EKF-SLAM-based optimization research [6]. In addition, in 2014, a method of minimizing noise and localizing Unmanned Aerial Vehicle (UAV) by using range-only measurement while simultaneously mapping the position of the wireless range sensors were proposed [31]. SLAM based on range measurement has been continuously researched and developed then applied to various fields. In this paper, we propose a novel technology that applying deep-learning to range-only SLAM that derives accurate range and robot position measurement through in-depth learning.

A. WHY ON THREE-DIMENSIONAL?

1) 2D

$$(x - x_1)^2 + (y - y_1)^2 = d_1^2 \quad (2)$$

$$(x - x_2)^2 + (y - y_2)^2 = d_2^2 \quad (3)$$

$$(x - x_3)^2 + (y - y_3)^2 = d_3^2 \quad (4)$$

$$(x - x_4)^2 + (y - y_4)^2 = d_4^2 \quad (5)$$

$$2(x_2 - x_1)x + 2(y_2 - y_1)y = (d_1^2 - d_2^2) - (x_1^2 - x_2^2) - (y_1^2 - y_2^2) \quad (6)$$

$$2(x_3 - x_1)x + 2(y_3 - y_1)y = (d_1^2 - d_3^2) - (x_1^2 - x_3^2) - (y_1^2 - y_3^2) \quad (7)$$

$$2(x_4 - x_1)x + 2(y_4 - y_1)y = (d_1^2 - d_4^2) - (x_1^2 - x_4^2) - (y_1^2 - y_4^2) \quad (8)$$

$$A_{2D}X_{2D} = b_{2D} \quad (9)$$

where X_{2D} indicates $[x, y]^T$ and A_{2D} and b_{2D} are as follows:

$$A_{2D} = \begin{bmatrix} 2(x_2 - x_1) & 2(y_2 - y_1) \\ 2(x_3 - x_1) & 2(y_3 - y_1) \\ 2(x_4 - x_1) & 2(y_4 - y_1) \end{bmatrix} \quad (10)$$

$$b_{2D} = \begin{bmatrix} (d_1^2 - d_2^2) - (x_1^2 - x_2^2) - (y_1^2 - y_2^2) \\ (d_1^2 - d_3^2) - (x_1^2 - x_3^2) - (y_1^2 - y_3^2) \\ (d_1^2 - d_4^2) - (x_1^2 - x_4^2) - (y_1^2 - y_4^2) \end{bmatrix} \quad (11)$$

2) 3D

$$(x - x_1)^2 + (y - y_1)^2 + (z - z_1)^2 = d_1^2 \quad (12)$$

$$(x - x_2)^2 + (y - y_2)^2 + (z - z_2)^2 = d_2^2 \quad (13)$$

$$(x - x_3)^2 + (y - y_3)^2 + (z - z_3)^2 = d_3^2 \quad (14)$$

$$(x - x_4)^2 + (y - y_4)^2 + (z - z_4)^2 = d_4^2 \quad (15)$$

$$2(x_2 - x_1)x + 2(y_2 - y_1)y + 2(z_2 - z_1)z = (d_1^2 - d_2^2) - (x_1^2 - x_2^2) - (y_1^2 - y_2^2) - (z_1^2 - z_2^2) \quad (16)$$

$$2(x_3 - x_1)x + 2(y_3 - y_1)y + 2(z_3 - z_1)z = (d_1^2 - d_3^2) - (x_1^2 - x_3^2) - (y_1^2 - y_3^2) - (z_1^2 - z_3^2) \quad (17)$$

$$2(x_4 - x_1)x + 2(y_4 - y_1)y + 2(z_4 - z_1)z = (d_1^2 - d_4^2) - (x_1^2 - x_4^2) - (y_1^2 - y_4^2) - (z_1^2 - z_4^2) \quad (18)$$

$$A_{3D}X_{3D} = b_{3D} \quad (19)$$

where X_{3D} indicates $[x, y, z]^T$ and A_{3D} and b_{3D} are as follows:

$$A_{3D} = \begin{bmatrix} 2(x_2 - x_1) & 2(y_2 - y_1) & 2(z_2 - z_1) \\ 2(x_3 - x_1) & 2(y_3 - y_1) & 2(z_3 - z_1) \\ 2(x_4 - x_1) & 2(y_4 - y_1) & 2(z_4 - z_1) \end{bmatrix} \quad (20)$$

$$b_{3D} = \begin{bmatrix} (d_1^2 - d_2^2) - (x_1^2 - x_2^2) - (y_1^2 - y_2^2) - (z_1^2 - z_2^2) \\ (d_1^2 - d_3^2) - (x_1^2 - x_3^2) - (y_1^2 - y_3^2) - (z_1^2 - z_3^2) \\ (d_1^2 - d_4^2) - (x_1^2 - x_4^2) - (y_1^2 - y_4^2) - (z_1^2 - z_4^2) \end{bmatrix} \quad (21)$$

Unlike the case of 2D, A_{3D} consists of z components on the third column. Let a_{3D}^{ij} be the i^{th} row and j^{th} component of A_{3D} . In ideal case the anchor nodes are placed to square position with equal height, then a_{3D}^{12} , a_{3D}^{31} , and elements of the third columns are equal to zero. This cause the rank deficiency, however that terms could not be the zero even though the anchor nodes are placed carefully. in real-world, it is hard to put the anchor nodes with exactly same position. As a result, $z_1 \approx z_2 \approx z_3 \approx z_4 \approx A_{3D}$

B. DEEP LEARNING FOR LOCALIZATION

There have been many approaches combining Simultaneous Localization and Mapping (SLAM) with deep learning, aiming to overcome the limitations on SLAM only technique such as difficulty on tuning the proper parameters in different environments and recovering an exact scale. Actually, those researches are showing the superior performance to the traditional SLAM approaches.

One of the popular SLAM techniques with deep learning is CNN-SLAM [32] which takes Convolutional Neural Networks (CNNs) to precisely predict the depth from a single image without any scene-based assumptions or geometric constraints, allowing them to recover the absolute scale of reconstruction. Another approach using deep learning for localization is Deep VO [27] In this method, Recurrent Convolutional Neural Networks (RCNNs) is utilized. Specifically, feature representation is learned by Convolutional Neural Networks and Sequential information and motion dynamics are obtained by deep Recurrent Neural Networks without using any module in the classic VO pipeline.

C. APPLICATIONS OF LSTMS

There are many variations of LSTM architecture. As studies of deep learning are getting popular, various modified architectures of LSTM have been proposed for many tasks in a wide area of science and engineering. Because LSTM is powerful when dealing with sequential data and inferring output by using previous inputs, LSTM is utilized to estimate pose by being attached to the end part of deep learning architecture [17]–[19] as a stacked form of LSTM. In addition, LSTM takes many various data as input; LSTM is exploited for sequential modeling using LiDAR scan data [16], images [14], [17], IMU [26], a fusion of IMU and images [27]. Since existing RO-SLAM performs localization using low-dimensional data, it is difficult to estimate even if the value deviates slightly from the model. In addition, LSTM has the advantage of being able to solve long-term dependence problem of traditional RNN, and it is possible to model it by non-linear mapping through analyzing the current situation without modeling data characteristics separately. Therefore, we propose RO SLAM technology using deep learning based SLAM which applies the advantages of LSTM and deep learning to solve the disadvantages of RO SLAM.

D. ATTENTION

Attention is powerful module nowadays and mostly improves performance of neural network. Originally neural networks treats information equally. But, using attention layer, neural networks can be ATTENDED what it should be examined closely. At the first time, attention is utilized at natural language processing area for improving translation performance [33]. But nowadays, attention layer is employed in many areas to improve the performance of the networks. For example, Jaderbeg *et al.* [34] introduced the attention layer to let the neural networks attend to spatial information. In addition, attention is even utilized to pose estimation and optimization [35], detection [36], and video captioning [37]

II. LSTM EQUATION

$$i_t = \sigma(W_{xi} \cdot x_t + W_{hi} \cdot h_{t-1} + W_{ci} \cdot c_{t-1} + b_i) \quad (22)$$

$$f_t = \sigma(W_{xf} \cdot x_t + W_{hf} \cdot h_{t-1} + W_{cf} \cdot c_{t-1} + b_f) \quad (23)$$

$$\tilde{c}_t = \tanh(W_{xc} \cdot x_t + W_{hc} \cdot h_{t-1} + b_c) \quad (24)$$

$$c_t = f_t \cdot c_{t-1} + i_t \cdot \tilde{c}_t \quad (25)$$

$$o_t = \sigma(W_{xo} \cdot x_t + W_{ho} \cdot h_{t-1} + W_{co} \cdot c_t + b_o) \quad (26)$$

$$h_t = o_t \cdot \tanh(c_t) \quad (27)$$

where σ is the sigmoid function, i_t, f_t and o_t are respectively the input, forget, output gates, and c_t is cell states. Entire gates are activated by sigmoid function and cell states are activated by tanh function.

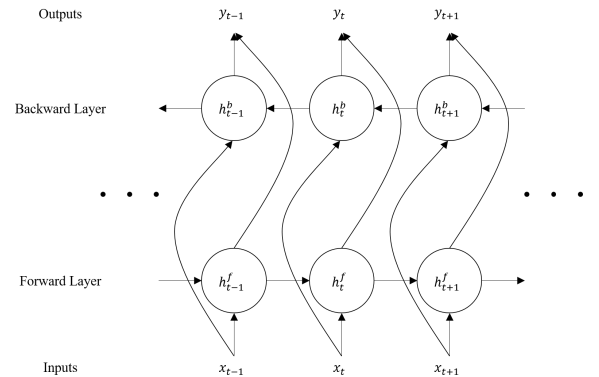


FIGURE 1: Bidirectional LSTM

$$h_t^f = \mathcal{H}(W_{xhf} \cdot x_t + W_{hff} \cdot h_{t-1}^f + b_{hf}) \quad (28)$$

$$h_t^b = \mathcal{H}(W_{xhb} \cdot x_t + W_{hbb} \cdot h_{t-1}^b + b_{hb}) \quad (29)$$

$$y_t = W_{hyf} \cdot h_t^f + W_{hyb} \cdot h_t^b + b_y \quad (30)$$

\mathcal{H} is Hidden layer activation function. In bidirectional LSTM, upper composite function is used for \mathcal{H} .

III. GUIDELINES FOR GRAPHICS PREPARATION AND SUBMISSION

TABLE 1: Units for Magnetic Properties

Symbol	Quantity	Conversion from Gaussian and CGS EMU to SI ^a
Φ	magnetic flux	1 Mx \rightarrow 10^{-8} Wb = 10^{-8} V·s
B	magnetic flux density, magnetic induction	1 G \rightarrow 10^{-4} T = 10^{-4} Wb/m ²
H	magnetic field strength	1 Oe \rightarrow $10^3/(4\pi)$ A/m
m	magnetic moment	1 erg/G = 1 emu \rightarrow 10^{-3} A·m ² = 10^{-3} J/T
M	magnetization	1 erg/(G·cm ³) = 1 emu/cm ³ \rightarrow 10^3 A/m
$4\pi M$	magnetization	1 G \rightarrow $10^3/(4\pi)$ A/m
σ	specific magnetization	1 erg/(G·g) = 1 emu/g \rightarrow 1 A·m ² /kg
j	magnetic dipole moment	1 erg/G = 1 emu \rightarrow $4\pi \times 10^{-10}$ Wb·m
J	magnetic polarization	1 erg/(G·cm ³) = 1 emu/cm ³ \rightarrow $4\pi \times 10^{-4}$ T
χ, κ	susceptibility	1 \rightarrow 4π
χ_ρ	mass susceptibility	1 cm ³ /g \rightarrow $4\pi \times 10^{-3}$ m ³ /kg
μ	permeability	1 \rightarrow $4\pi \times 10^{-7}$ H/m = $4\pi \times 10^{-7}$ Wb/(A·m)
μ_r	relative permeability	$\mu \rightarrow \mu_r$
w, W	energy density	1 erg/cm ³ \rightarrow 10^{-1} J/m ³
N, D	demagnetizing factor	1 \rightarrow $1/(4\pi)$

Vertical lines are optional in tables. Statements that serve as captions for the entire table do not need footnote letters.

^aGaussian units are the same as cg emu for magnetostatics; Mx = maxwell, G = gauss, Oe = oersted; Wb = weber, V = volt, s = second, T = tesla, m = meter, A = ampere, J = joule, kg = kilogram, H = henry.

A. TYPES OF GRAPHICS

The following list outlines the different types of graphics published in IEEE journals. They are categorized based on their construction, and use of color/shades of gray:

1) Color/Grayscale figures

Figures that are meant to appear in color, or shades of black/gray. Such figures may include photographs, illustrations, multicolor graphs, and flowcharts.

2) Line Art figures

Figures that are composed of only black lines and shapes. These figures should have no shades or half-tones of gray, only black and white.

3) Author photos

Head and shoulders shots of authors that appear at the end of our papers.

4) Tables

Data charts which are typically black and white, but sometimes include color.

IV. WSN NET

1) LSTM

LSTM is a type of Recurrent Neural Networks(RNNs) that has loops so that infer output based on not only the input data, but also the internal state formed by previous information. In other words, while the RNN deals with sequential data, the network has remembered the previous state generated by

past inputs and might be able to output the present time step via internal state and input, which is very similar to filtering algorithms.

However, RNNs often have a *vanishing gradient problem*, i.e., RNNs fail to propagate the previous matter into present tasks as time step gap grows by. In other words, RNNs are not able to learn to store appropriate internal states and operate on long-term trends. That is the reason why the Long Short-Term Memory (LSTM) architecture was introduced to solve this long-term dependency problem and make the networks possible to learn longer-term contextual understandings [38]. By virtue of the LSTM architecture that has memory gates and units that enable learning of long-term dependencies [39], LSTM are widely used in most of the deep learning research areas and numerous variations of LSTM architectures have been studied.

A. MULTIPART FIGURES

Figures compiled of more than one sub-figure presented side-by-side, or stacked. If a multipart figure is made up of multiple figure types (one part is lineart, and another is grayscale or color) the figure should meet the stricter guidelines.

B. FILE FORMATS FOR GRAPHICS

Format and save your graphics using a suitable graphics processing program that will allow you to create the images as PostScript (PS), Encapsulated PostScript (EPS), Tagged Image File Format (.TIFF), Portable Document Format (.PDF), Portable Network Graphics (.PNG), or Metapost (.MPS), sizes them, and adjusts the resolution settings. When submitting your final paper, your graphics should all be submitted individually in one of these formats along with the manuscript.

C. SIZING OF GRAPHICS

Most charts, graphs, and tables are one column wide (3.5 inches/88 millimeters/21 picas) or page wide (7.16 inches/181 millimeters/43 picas). The maximum depth a graphic can be is 8.5 inches (216 millimeters/54 picas). When choosing the depth of a graphic, please allow space for a caption. Figures can be sized between column and page widths if the author chooses, however it is recommended that figures are not sized less than column width unless when necessary.

There is currently one publication with column measurements that do not coincide with those listed above. Proceedings of the IEEE has a column measurement of 3.25 inches (82.5 millimeters/19.5 picas).

The final printed size of author photographs is exactly 1 inch wide by 1.25 inches tall (25.4 millimeters \times 31.75 millimeters/6 picas \times 7.5 picas). Author photos printed in editorials measure 1.59 inches wide by 2 inches tall (40 millimeters \times 50 millimeters/9.5 picas \times 12 picas).

D. RESOLUTION

The proper resolution of your figures will depend on the type of figure it is as defined in the “Types of Figures” section. Author photographs, color, and grayscale figures should be at least 300dpi. Line art, including tables should be a minimum of 600dpi.

E. VECTOR ART

In order to preserve the figures’ integrity across multiple computer platforms, we accept files in the following formats: .EPS/.PDF/.PS. All fonts must be embedded or text converted to outlines in order to achieve the best-quality results.

F. COLOR SPACE

The term color space refers to the entire sum of colors that can be represented within the said medium. For our purposes, the three main color spaces are Grayscale, RGB (red/green/blue) and CMYK (cyan/magenta/yellow/black). RGB is generally used with on-screen graphics, whereas CMYK is used for printing purposes.

All color figures should be generated in RGB or CMYK color space. Grayscale images should be submitted in Grayscale color space. Line art may be provided in grayscale OR bitmap colorspace. Note that “bitmap colorspace” and “bitmap file format” are not the same thing. When bitmap color space is selected, .TIF/.TIFF/.PNG are the recommended file formats.

G. ACCEPTED FONTS WITHIN FIGURES

When preparing your graphics IEEE suggests that you use of one of the following Open Type fonts: Times New Roman, Helvetica, Arial, Cambria, and Symbol. If you are supplying EPS, PS, or PDF files all fonts must be embedded. Some fonts may only be native to your operating system; without the fonts embedded, parts of the graphic may be distorted or missing.

A safe option when finalizing your figures is to strip out the fonts before you save the files, creating “outline” type. This converts fonts to artwork what will appear uniformly on any screen.

V. EXPERIMENTS

A. EXPERIMENTAL ENVIRONMENT

Our experimental system consists of a UWB (ultra wideband) sensor tag and eight anchors that have a UWB transceiver, the motion capture system with 12 cameras, a mobile robot and a small form-factor computer.

UWB sensor anchors are attached to landmarks. These become the end points of the range measurements. The anchor nodes transmit the UWB signal. A UWB sensor tag is attached to a robot. It becomes the opposite side end point of the measurements. The tag node receives the signal and measures the range between two devices. Each UWB transceiver, DW1000 UWB-chip made by Decawave, supports 6 RF bands from 3.5 GHz to 6.5 GHz. It measures

in centimeter-level accuracy. Fig. 2(a) shows anchor and tag nodes.

We inference the position of a robot with our network. To train the network and test the results, the ground truths are needed. We get the ground truth by using the motion capture system. The system is Eagle Digital Realtime system of motion analysis corporation that operates with the principle of stereo pattern recognition that is a kind of photogrammetry based on the epipolar geometry and the triangulation methodology. We attach four markers to a robot. The system gives us the location of these markers and has < 1mm accuracy.

A mobile robot used in experiment is iClebo Kobuki from Yujinrobot that has 70 cm/s maximum velocity. The small form-factor computer is a gigabyte Ultra compact PC. Deep learning framework used for our network is pytorch 0.4.0 on python 3.6. The network inferences on the same setting.

The UWB tag is attached to mobile robot that has a small compact computer. The UWB anchors are attached to stands that have two different heights. The anchors are positioned randomly in the square space. As you can see in Fig. 2(b), a mobile robot manually goes on various random trajectories by experimenters.

During the robot is going on, the data is saved in the computer. The distance data used for input data is measured by the UWB sensors. The global position data used for ground truth is measured by the motion capture system. These two kinds of data are paired in a dataset. The computer receives these two kinds of data respectively and synchronizes these by time. To synchronize, we make an independent thread that concatenates and saves these data at the same time. The data is saved at 20Hz frequency. Each trajectory becomes one dataset. All the trajectories are different. Fig. 2(c) shows this process. After collecting whole datasets, we separate the entire dataset to two types, some are the training datasets and others are test datasets.

1) Figure Axis labels

Figure axis labels are often a source of confusion. Use words rather than symbols. As an example, write the quantity “Magnetization,” or “Magnetization M,” not just “M.” Put units in parentheses. Do not label axes only with units. As in Fig. 1, for example, write “Magnetization (A/m)” or “Magnetization ($A \cdot m^{-1}$),” not just “A/m.” Do not label axes with a ratio of quantities and units. For example, write “Temperature (K),” not “Temperature/K.”

Multipliers can be especially confusing. Write “Magnetization (kA/m)” or “Magnetization (10^3 A/m).” Do not write “Magnetization (A/m) \times 1000” because the reader would not know whether the top axis label in Fig. 1 meant 16000 A/m or 0.016 A/m. Figure labels should be legible, approximately 8 to 10 point type.

2) Subfigure Labels in Multipart Figures and Tables

Multipart figures should be combined and labeled before final submission. Labels should appear centered below each

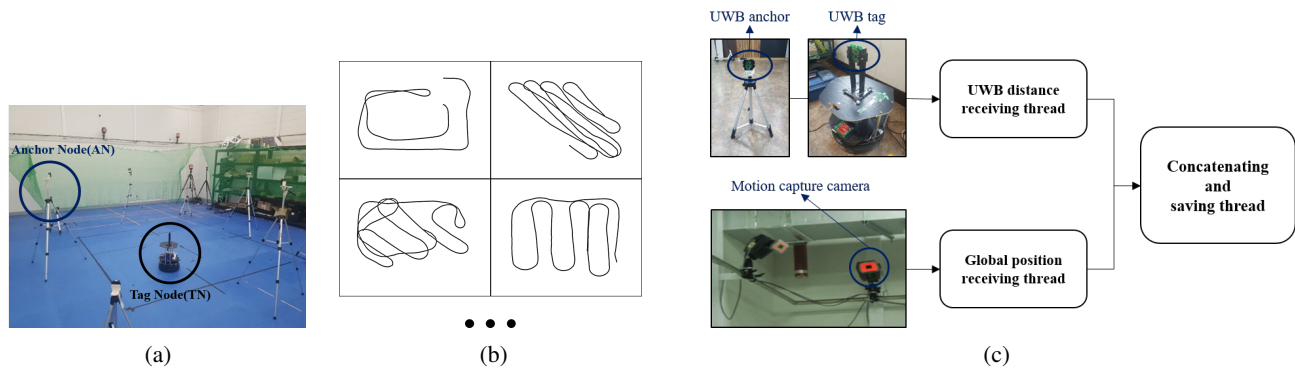


FIGURE 2: Figures from experiment (a)The anchor and tag nodes (b)Four examples of the trajectory (c) the process that makes dataset

subfigure in 8 point Times New Roman font in the format of (a) (b) (c).

B. FILE NAMING

Figures (line artwork or photographs) should be named starting with the first 5 letters of the author's last name. The next characters in the filename should be the number that represents the sequential location of this image in your article. For example, in author "Anderson's" paper, the first three figures would be named *ander1.tif*, *ander2.tif*, and *ander3.ps*.

Tables should contain only the body of the table (not the caption) and should be named similarly to figures, except that '.t' is inserted in-between the author's name and the table number. For example, author Anderson's first three tables would be named *ander.t1.tif*, *ander.t2.ps*, and *ander.t3.eps*.

Author photographs should be named using the first five characters of the pictured author's last name. For example, four author photographs for a paper may be named: *oppen.ps*, *moshc.tif*, *chen.eps*, and *duran.pdf*.

If two authors or more have the same last name, their first initial(s) can be substituted for the fifth, fourth, third... letters of their surname until the degree where there is differentiation. For example, two authors Michael and Monica Oppenheimer's photos would be named *oppmi.tif*, and *oppmo.eps*.

C. REFERENCING A FIGURE OR TABLE WITHIN YOUR PAPER

When referencing your figures and tables within your paper, use the abbreviation "Fig." even at the beginning of a sentence. Do not abbreviate "Table." Tables should be numbered with Roman Numerals.

D. CHECKING YOUR FIGURES: THE IEEE GRAPHICS ANALYZER

The IEEE Graphics Analyzer enables authors to pre-screen their graphics for compliance with IEEE Access standards before submission. The online tool, located at <http://graphicsqc.ieee.org/>, allows authors to upload their graphics in order to check that each file is the correct file format, resolution, size and colorspace; that no fonts are missing

or corrupt; that figures are not compiled in layers or have transparency, and that they are named according to the IEEE Access naming convention. At the end of this automated process, authors are provided with a detailed report on each graphic within the web applet, as well as by email.

For more information on using the Graphics Analyzer or any other graphics related topic, contact the IEEE Graphics Help Desk by e-mail at graphics@ieee.org.

E. SUBMITTING YOUR GRAPHICS

Because IEEE will do the final formatting of your paper, you do not need to position figures and tables at the top and bottom of each column. In fact, all figures, figure captions, and tables can be placed at the end of your paper. In addition to, or even in lieu of submitting figures within your final manuscript, figures should be submitted individually, separate from the manuscript in one of the file formats listed above in Section IV-B. Place figure captions below the figures; place table titles above the tables. Please do not include captions as part of the figures, or put them in "text boxes" linked to the figures. Also, do not place borders around the outside of your figures.

F. COLOR PROCESSING/PRINTING IN IEEE JOURNALS

All IEEE Transactions, Journals, and Letters allow an author to publish color figures on IEEE Xplore® at no charge, and automatically convert them to grayscale for print versions. In most journals, figures and tables may alternatively be printed in color if an author chooses to do so. Please note that this service comes at an extra expense to the author. If you intend to have print color graphics, include a note with your final paper indicating which figures or tables you would like to be handled that way, and stating that you are willing to pay the additional fee.

VI. CONCLUSION

A conclusion section is not required. Although a conclusion may review the main points of the paper, do not replicate the abstract as the conclusion. A conclusion might elaborate

on the importance of the work or suggest applications and extensions.

Appendixes, if needed, appear before the acknowledgment.

ACKNOWLEDGMENT

The preferred spelling of the word “acknowledgment” in American English is without an “e” after the “g.” Use the singular heading even if you have many acknowledgments. Avoid expressions such as “One of us (S.B.A.) would like to thank” Instead, write “F. A. Author thanks” In most cases, sponsor and financial support acknowledgments are placed in the unnumbered footnote on the first page, not here.

REFERENCES AND FOOTNOTES

A. REFERENCES

References need not be cited in text. When they are, they appear on the line, in square brackets, inside the punctuation. Multiple references are each numbered with separate brackets. When citing a section in a book, please give the relevant page numbers. In text, refer simply to the reference number. Do not use “Ref.” or “reference” except at the beginning of a sentence: “Reference [?] shows” Please do not use automatic endnotes in Word, rather, type the reference list at the end of the paper using the “References” style.

Reference numbers are set flush left and form a column of their own, hanging out beyond the body of the reference. The reference numbers are on the line, enclosed in square brackets. In all references, the given name of the author or editor is abbreviated to the initial only and precedes the last name. Use them all; use et al. only if names are not given. Use commas around Jr., Sr., and III in names. Abbreviate conference titles. When citing IEEE transactions, provide the issue number, page range, volume number, year, and/or month if available. When referencing a patent, provide the day and the month of issue, or application. References may not include all information; please obtain and include relevant information. Do not combine references. There must be only one reference with each number. If there is a URL included with the print reference, it can be included at the end of the reference.

Other than books, capitalize only the first word in a paper title, except for proper nouns and element symbols. For papers published in translation journals, please give the English citation first, followed by the original foreign-language citation. See the end of this document for formats and examples of common references. For a complete discussion of references and their formats, see the IEEE style manual at <http://www.ieee.org/authortools>.

B. FOOTNOTES

Number footnotes separately in superscript numbers.¹ Place the actual footnote at the bottom of the column in which it is cited; do not put footnotes in the reference list (endnotes). Use letters for table footnotes (see Table 1).

APPENDIX A SUBMITTING YOUR PAPER FOR REVIEW

A. FINAL STAGE

When you submit your final version (after your paper has been accepted), print it in two-column format, including figures and tables. You must also send your final manuscript on a disk, via e-mail, or through a Web manuscript submission system as directed by the society contact. You may use Zip for large files, or compress files using Compress, Pkzip, Stuffit, or Gzip.

Also, send a sheet of paper or PDF with complete contact information for all authors. Include full mailing addresses, telephone numbers, fax numbers, and e-mail addresses. This information will be used to send each author a complimentary copy of the journal in which the paper appears. In addition, designate one author as the “corresponding author.” This is the author to whom proofs of the paper will be sent. Proofs are sent to the corresponding author only.

B. REVIEW STAGE USING SCHOLARONE® MANUSCRIPTS

Contributions to the Transactions, Journals, and Letters may be submitted electronically on IEEE’s online manuscript submission and peer-review system, ScholarOne® Manuscripts. You can get a listing of the publications that participate in ScholarOne at http://www.ieee.org/publications_standards/publications/authors/authors_submission.html. First check if you have an existing account. If there is none, please create a new account. After logging in, go to your Author Center and click “Submit First Draft of a New Manuscript.”

Along with other information, you will be asked to select the subject from a pull-down list. Depending on the journal, there are various steps to the submission process; you must complete all steps for a complete submission. At the end of each step you must click “Save and Continue”; just uploading the paper is not sufficient. After the last step, you should see a confirmation that the submission is complete. You should also receive an e-mail confirmation. For inquiries regarding the submission of your paper on ScholarOne Manuscripts, please contact oprs-support@ieee.org or call +1 732 465 5861.

ScholarOne Manuscripts will accept files for review in various formats. Please check the guidelines of the specific journal for which you plan to submit.

You will be asked to file an electronic copyright form immediately upon completing the submission process (authors

¹It is recommended that footnotes be avoided (except for the unnumbered footnote with the receipt date on the first page). Instead, try to integrate the footnote information into the text.

are responsible for obtaining any security clearances). Failure to submit the electronic copyright could result in publishing delays later. You will also have the opportunity to designate your article as “open access” if you agree to pay the IEEE open access fee.

C. FINAL STAGE USING SCHOLARONE MANUSCRIPTS

Upon acceptance, you will receive an email with specific instructions regarding the submission of your final files. To avoid any delays in publication, please be sure to follow these instructions. Most journals require that final submissions be uploaded through ScholarOne Manuscripts, although some may still accept final submissions via email. Final submissions should include source files of your accepted manuscript, high quality graphic files, and a formatted pdf file. If you have any questions regarding the final submission process, please contact the administrative contact for the journal.

In addition to this, upload a file with complete contact information for all authors. Include full mailing addresses, telephone numbers, fax numbers, and e-mail addresses. Designate the author who submitted the manuscript on ScholarOne Manuscripts as the “corresponding author.” This is the only author to whom proofs of the paper will be sent.

D. COPYRIGHT FORM

Authors must submit an electronic IEEE Copyright Form (eCF) upon submitting their final manuscript files. You can access the eCF system through your manuscript submission system or through the Author Gateway. You are responsible for obtaining any necessary approvals and/or security clearances. For additional information on intellectual property rights, visit the IEEE Intellectual Property Rights department web page at http://www.ieee.org/publications_standards/publications/rights/index.html.

APPENDIX B IEEE PUBLISHING POLICY

The general IEEE policy requires that authors should only submit original work that has neither appeared elsewhere for publication, nor is under review for another refereed publication. The submitting author must disclose all prior publication(s) and current submissions when submitting a manuscript. Do not publish “preliminary” data or results. The submitting author is responsible for obtaining agreement of all coauthors and any consent required from employers or sponsors before submitting an article. The IEEE Access Department strongly discourages courtesy authorship; it is the obligation of the authors to cite only relevant prior work.

The IEEE Access Department does not publish conference records or proceedings, but can publish articles related to conferences that have undergone rigorous peer review. Minimally, two reviews are required for every article submitted for peer review.

APPENDIX C PUBLICATION PRINCIPLES

The two types of contents of that are published are; 1) peer-reviewed and 2) archival. The Access Department publishes scholarly articles of archival value as well as tutorial expositions and critical reviews of classical subjects and topics of current interest.

Authors should consider the following points:

- 1) Technical papers submitted for publication must advance the state of knowledge and must cite relevant prior work.
- 2) The length of a submitted paper should be commensurate with the importance, or appropriate to the complexity, of the work. For example, an obvious extension of previously published work might not be appropriate for publication or might be adequately treated in just a few pages.
- 3) Authors must convince both peer reviewers and the editors of the scientific and technical merit of a paper; the standards of proof are higher when extraordinary or unexpected results are reported.
- 4) Because replication is required for scientific progress, papers submitted for publication must provide sufficient information to allow readers to perform similar experiments or calculations and use the reported results. Although not everything need be disclosed, a paper must contain new, useable, and fully described information. For example, a specimen's chemical composition need not be reported if the main purpose of a paper is to introduce a new measurement technique. Authors should expect to be challenged by reviewers if the results are not supported by adequate data and critical details.
- 5) Papers that describe ongoing work or announce the latest technical achievement, which are suitable for presentation at a professional conference, may not be appropriate for publication.

REFERENCES

- [1] F. Thomas and L. Ros, “Revisiting trilateration for robot localization,” *IEEE Transactions on robotics*, vol. 21, no. 1, pp. 93–101, 2005.
- [2] H. Cho and S. W. Kim, “Mobile robot localization using biased chirp-spread-spectrum ranging,” *IEEE transactions on industrial electronics*, vol. 57, no. 8, pp. 2826–2835, 2010.
- [3] A. N. Raghavan, H. Ananthapadmanaban, M. S. Sivamurugan, and B. Ravindran, “Accurate mobile robot localization in indoor environments using bluetooth,” in *Robotics and Automation (ICRA)*, 2010 IEEE International Conference on. IEEE, 2010, pp. 4391–4396.
- [4] J.-L. Blanco, J. González, and J.-A. Fernández-Madrigal, “A pure probabilistic approach to range-only slam,” in *ICRA*. Citeseer, 2008, pp. 1436–1441.
- [5] J.-L. Blanco, J.-A. Fernández-Madrigal, and J. González, “Efficient probabilistic range-only slam,” in *Intelligent Robots and Systems, 2008. IROS 2008. IEEE/RSJ International Conference on*. IEEE, 2008, pp. 1017–1022.
- [6] F. R. Fabresse, F. Caballero, I. Maza, and A. Ollero, “Undelayed 3d roslam based on gaussian-mixture and reduced spherical parametrization,” in *Intelligent Robots and Systems (IROS)*, 2013 IEEE/RSJ International Conference on. Citeseer, 2013, pp. 1555–1561.
- [7] N. S. Shetty, “Particle filter approach to overcome multipath propagation error in slam indoor applications,” Ph.D. dissertation, The University of North Carolina at Charlotte, 2018.

- [8] Y. LeCun, Y. Bengio, and G. Hinton, "Deep learning," *nature*, vol. 521, no. 7553, p. 436, 2015.
- [9] I. Lenz, H. Lee, and A. Saxena, "Deep learning for detecting robotic grasps," *The International Journal of Robotics Research*, vol. 34, no. 4-5, pp. 705-724, 2015.
- [10] Z. Cai, Q. Fan, R. S. Feris, and N. Vasconcelos, "A unified multi-scale deep convolutional neural network for fast object detection," in *European Conference on Computer Vision*. Springer, 2016, pp. 354-370.
- [11] H. H. Smith, "Object detection and distance estimation using deep learning algorithms for autonomous robotic navigation," 2018.
- [12] Y. Zhu, R. Mottaghi, E. Kolve, J. J. Lim, A. Gupta, L. Fei-Fei, and A. Farhadi, "Target-driven visual navigation in indoor scenes using deep reinforcement learning," in *Robotics and Automation (ICRA)*, 2017 IEEE International Conference on. IEEE, 2017, pp. 3357-3364.
- [13] M. Hamandi, M. D'Arcy, and P. Fazli, "Deepmotion: Learning to navigate like humans," *arXiv preprint arXiv:1803.03719*, 2018.
- [14] F. Walch, C. Hazirbas, L. Leal-Taixe, T. Sattler, S. Hilsenbeck, and D. Cremers, "Image-based localization using lstms for structured feature correlation," in *Int. Conf. Comput. Vis.(ICCV)*, 2017, pp. 627-637.
- [15] J. L. Elman, "Finding structure in time," *Cognitive science*, vol. 14, no. 2, pp. 179-211, 1990.
- [16] S. Gladh, M. Danelljan, F. S. Khan, and M. Felsberg, "Deep motion features for visual tracking," in *Pattern Recognition (ICPR)*, 2016 23rd International Conference on. IEEE, 2016, pp. 1243-1248.
- [17] S. Wang, R. Clark, H. Wen, and N. Trigoni, "Deepvo: Towards end-to-end visual odometry with deep recurrent convolutional neural networks," in *Robotics and Automation (ICRA)*, 2017 IEEE International Conference on. IEEE, 2017, pp. 2043-2050.
- [18] A. Kendall, M. Grimes, and R. Cipolla, "Posenet: A convolutional network for real-time 6-dof camera relocalization," in *Proceedings of the IEEE international conference on computer vision*, 2015, pp. 2938-2946.
- [19] M. Turan, Y. Almalioglu, H. Araujo, E. Konukoglu, and M. Sitti, "Deep endovo: A recurrent convolutional neural network (rcnn) based visual odometry approach for endoscopic capsule robots," *Neurocomputing*, vol. 275, pp. 1861-1870, 2018.
- [20] J. Jung and H. Myung, "Indoor localization using particle filter and map-based nlos ranging model," in *Robotics and Automation (ICRA)*, 2011 IEEE International Conference on. IEEE, 2011, pp. 5185-5190.
- [21] S. K. Chenna, Y. K. Jain, H. Kapoor, R. S. Bapi, N. Yadaiah, A. Negi, V. S. Rao, and B. L. Deekshatulu, "State estimation and tracking problems: A comparison between kalman filter and recurrent neural networks," in *International Conference on Neural Information Processing*. Springer, 2004, pp. 275-281.
- [22] A. Shareef, Y. Zhu, and M. Musavi, "Localization using neural networks in wireless sensor networks," in *Proceedings of the 1st international conference on MOBILE Wireless MiddleWARE, Operating Systems, and Applications*. ICST (Institute for Computer Sciences, Social-Informatics and ...), 2008, p. 4.
- [23] M. S. Rahman, Y. Park, and K.-D. Kim, "Localization of wireless sensor network using artificial neural network," in *Communications and Information Technology*, 2009. ISCIT 2009. 9th International Symposium on. IEEE, 2009, pp. 639-642.
- [24] P. Singh and S. Agrawal, "Tdoa based node localization in wsn using neural networks," in *Communication Systems and Network Technologies (CSNT)*, 2013 International Conference on. IEEE, 2013, pp. 400-404.
- [25] M. Abdelhadi, M. Anan, and M. Ayyash, "Efficient artificial intelligent-based localization algorithm for wireless sensor networks," *Journal of Selected Areas in Telecommunications*, vol. 3, no. 5, pp. 10-18, 2013.
- [26] F. J. Ordóñez and D. Roggen, "Deep convolutional and lstm recurrent neural networks for multimodal wearable activity recognition," *Sensors*, vol. 16, no. 1, p. 115, 2016.
- [27] R. Clark, S. Wang, H. Wen, A. Markham, and N. Trigoni, "Vinet: Visual-inertial odometry as a sequence-to-sequence learning problem," in *AAAI*, 2017, pp. 3995-4001.
- [28] E. Olson, J. J. Leonard, and S. Teller, "Robust range-only beacon localization," *IEEE Journal of Oceanic Engineering*, vol. 31, no. 4, pp. 949-958, 2006.
- [29] J. Djughash, S. Singh, G. Kantor, and W. Zhang, "Range-only slam for robots operating cooperatively with sensor networks," in *Robotics and Automation*, 2006. ICRA 2006. Proceedings 2006 IEEE International Conference on. IEEE, 2006, pp. 2078-2084.
- [30] P. Yang, "Efficient particle filter algorithm for ultrasonic sensor-based 2d range-only simultaneous localisation and mapping application," *IET Wireless Sensor Systems*, vol. 2, no. 4, pp. 394-401, 2012.
- [31] F. R. Fabresse, F. Caballero, I. Maza, and A. Ollero, "Robust range-only slam for aerial vehicles," in *Unmanned Aircraft Systems (ICUAS)*, 2014 International Conference on. IEEE, 2014, pp. 750-755.
- [32] K. Tateno, F. Tombari, I. Laina, and N. Navab, "Cnn-slam: Real-time dense monocular slam with learned depth prediction," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, vol. 2, 2017.
- [33] M.-T. Luong, H. Pham, and C. D. Manning, "Effective approaches to attention-based neural machine translation," *arXiv preprint arXiv:1508.04025*, 2015.
- [34] M. Jaderberg, K. Simonyan, A. Zisserman, et al., "Spatial transformer networks," in *Advances in neural information processing systems*, 2015, pp. 2017-2025.
- [35] E. Parisotto, D. S. Chaplot, J. Zhang, and R. Salakhutdinov, "Global pose estimation with an attention-based recurrent network," *arXiv preprint arXiv:1802.06857*, 2018.
- [36] X. Zhu, J. Dai, L. Yuan, and Y. Wei, "Towards high performance video object detection," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 7210-7218.
- [37] J. Xu, T. Yao, Y. Zhang, and T. Mei, "Learning multimodal attention lstm networks for video captioning," in *Proceedings of the 2017 ACM on Multimedia Conference*. ACM, 2017, pp. 537-545.
- [38] S. Hochreiter and J. Schmidhuber, "Long short-term memory," *Neural computation*, vol. 9, no. 8, pp. 1735-1780, 1997.
- [39] W. Zaremba and I. Sutskever, "Learning to execute," *arXiv preprint arXiv:1410.4615*, 2014.



FIRST A. AUTHOR (M'76-SM'81-F'87) and all authors may include biographies. Biographies are often not included in conference-related papers. This author became a Member (M) of IEEE in 1976, a Senior Member (SM) in 1981, and a Fellow (F) in 1987. The first paragraph may contain a place and/or date of birth (list place, then date). Next, the author's educational background is listed. The degrees should be listed with type of degree in what field, which institution, city, state, and country, and year the degree was earned. The author's major field of study should be lower-cased.

The second paragraph uses the pronoun of the person (he or she) and not the author's last name. It lists military and work experience, including summer and fellowship jobs. Job titles are capitalized. The current job must have a location; previous positions may be listed without one. Information concerning previous publications may be included. Try not to list more than three books or published articles. The format for listing publishers of a book within the biography is: title of book (publisher name, year) similar to a reference. Current and previous research interests end the paragraph. The third paragraph begins with the author's title and last name (e.g., Dr. Smith, Prof. Jones, Mr. Kajor, Ms. Hunter). List any memberships in professional societies other than the IEEE. Finally, list any awards and work for IEEE committees and publications. If a photograph is provided, it should be of good quality, and professional-looking. Following are two examples of an author's biography.



SECOND B. AUTHOR was born in Greenwich Village, New York, NY, USA in 1977. He received the B.S. and M.S. degrees in aerospace engineering from the University of Virginia, Charlottesville, in 2001 and the Ph.D. degree in mechanical engineering from Drexel University, Philadelphia, PA, in 2008.

From 2001 to 2004, he was a Research Assistant with the Princeton Plasma Physics Laboratory.

Since 2009, he has been an Assistant Professor with the Mechanical Engineering Department, Texas A&M University, College Station. He is the author of three books, more than 150 articles, and more than 70 inventions. His research interests include high-pressure and high-density nonthermal plasma discharge processes and applications, microscale plasma discharges, discharges in liquids, spectroscopic diagnostics, plasma propulsion, and innovation plasma applications. He is an Associate Editor of the journal *Earth, Moon, Planets*, and holds two patents.

Dr. Author was a recipient of the International Association of Geomagnetism and Aeronomy Young Scientist Award for Excellence in 2008, and the IEEE Electromagnetic Compatibility Society Best Symposium Paper Award in 2011.



THIRD C. AUTHOR, JR. (M'87) received the B.S. degree in mechanical engineering from National Chung Cheng University, Chiayi, Taiwan, in 2004 and the M.S. degree in mechanical engineering from National Tsing Hua University, Hsinchu, Taiwan, in 2006. He is currently pursuing the Ph.D. degree in mechanical engineering at Texas A&M University, College Station, TX, USA.

From 2008 to 2009, he was a Research Assistant with the Institute of Physics, Academia Sinica, Taipei, Taiwan. His research interest includes the development of surface processing and biological/medical treatment techniques using nonthermal atmospheric pressure plasmas, fundamental study of plasma sources, and fabrication of micro- or nanostructured surfaces.

Mr. Author's awards and honors include the Frew Fellowship (Australian Academy of Science), the I. I. Rabi Prize (APS), the European Frequency and Time Forum Award, the Carl Zeiss Research Award, the William F. Meggers Award and the Adolph Lomb Medal (OSA).

• • •