

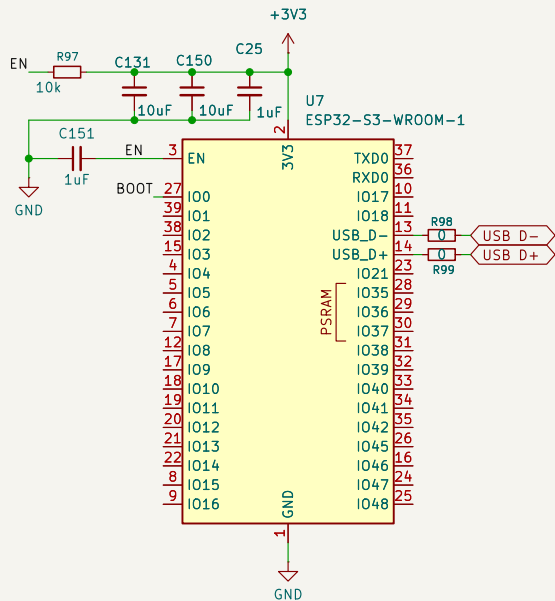
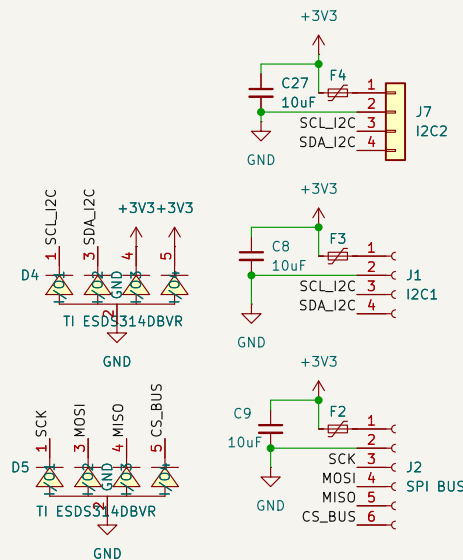






I2C_PMIC_IRQ
I2C_PMIC_SCL
I2C_PMIC_SDA
I2C_HOST_IRQ
I2C_HOST_SCL
I2C_HOST_SDA

USB D+ C_USB_T_P
C_USB_B_P
USB D- C_USB_T_N
C_USB_B_N



Sheet: /Root/
File: parsnip.kicad_sch



Title:

Size: A4
KiCad E.D.A. 10.0.5

Date: 2026-05-14


Rev:
Id: 1/6

LEDs and Jumpers

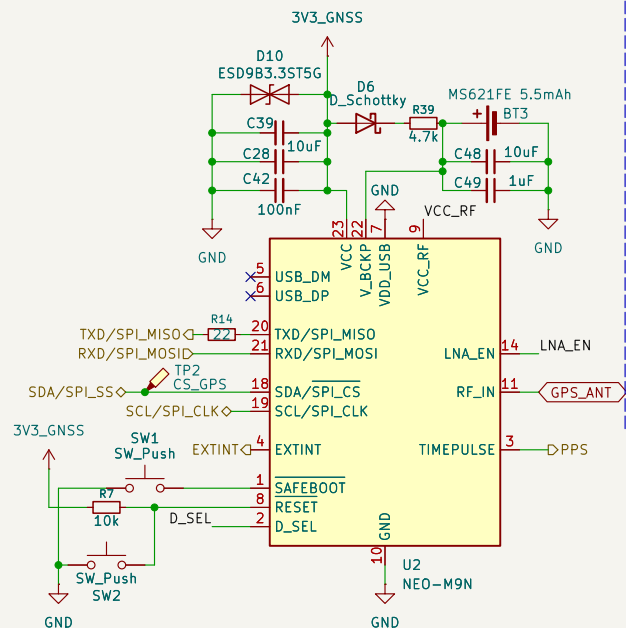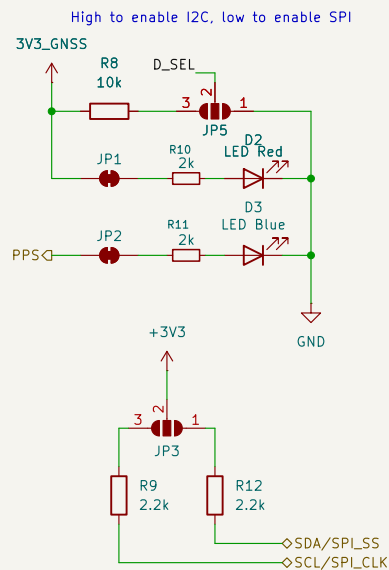


todo: switch module to use UART and not SPI
Theoretically compatible with NEO-M9N/M8N/M7N/M6N

Sparkfun Schematic: https://cdn.sparkfun.com/assets/1/0/a/8/a/SparkFun_GPS_NEO_M9N_SMA_UPDATE.pdf
 U-Blox Datasheet: https://content.u-blox.com/sites/default/files/NEO-M9N_Integrationmanual_UBX-19014286.pdf

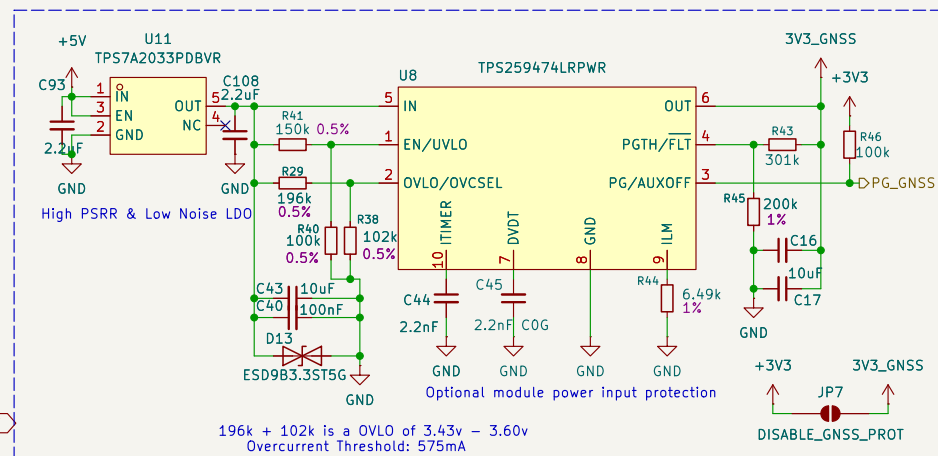

SMA + IPEX Connector

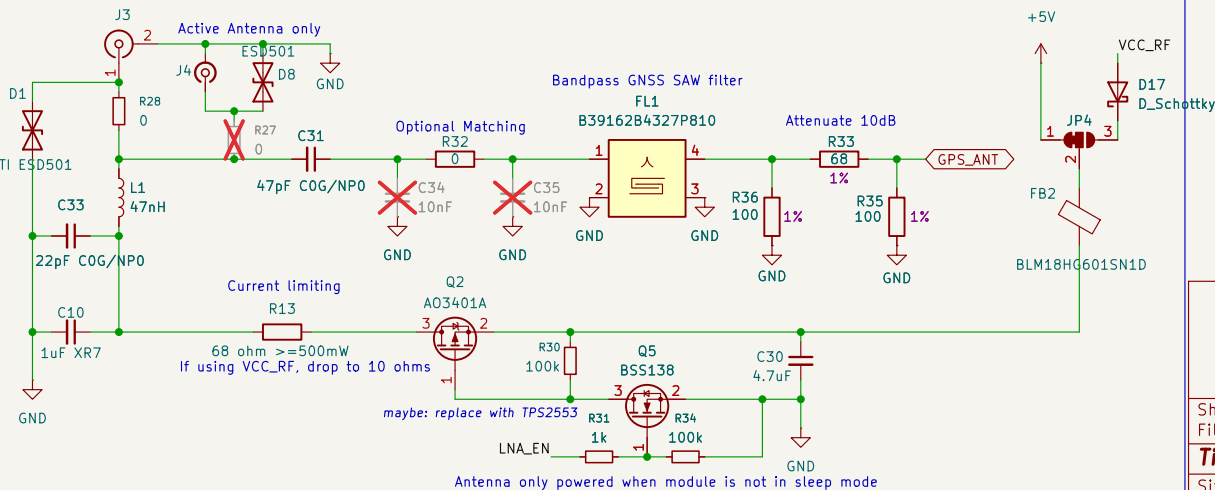

Sheet: /Root/GNSS/
File: gnss.kicad_sch



Title:


Size: A4	Date: 2026-05-14
----------	------------------

KiCad E.D.A. 10.0.5


Rev:

Id: 5/6

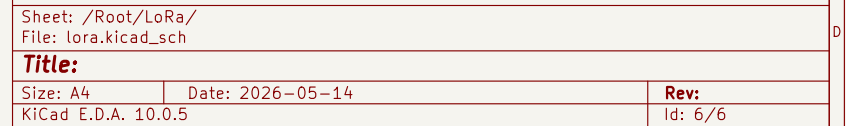

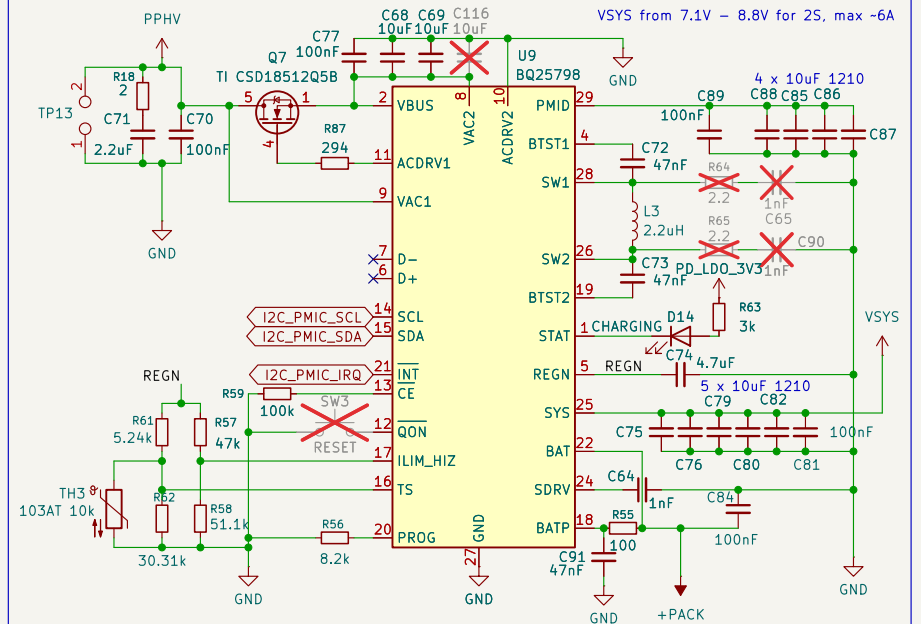

Capacitors voltage ratings specified, generally >25V – use XR7/C0G

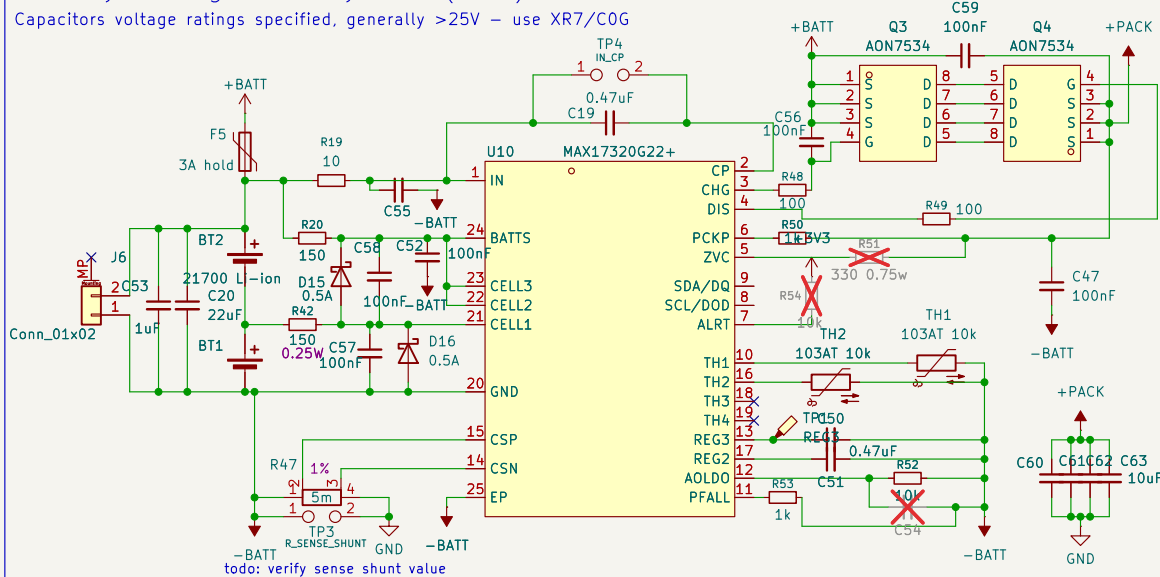

Rev:
Id: 3/6

[illegible]

Rev:
Id: 4/6